

Modular Cooking Range Line thermaline 80 - Water mixing tap with knobs, 1 Side - H=800

| ITEM # | | |
|---------|--|--|
| MODEL # | | |
| NAME # | | |
| | | |
| SIS # | | |
| AIA# | | |



588392 (MAEBHAB3OO)

Water mixing tap with knobs, one-side operated

Short Form Specification

Item No.

Water mixing tap with knobs for hot and cold water. Unit constructed according to DIN 18860_2 with 20 mm drop nose top and 70 mm recessed plinth. Internal frame for heavy duty sturdiness in stainless steel. 2 mm top in 1.4301 (AISI 304). Flat surface construction, easily cleanable. THERMODUL connection system enables seamless worktop when units are connected and avoids soil penetrating. IPX5 water resistant certification. Configuration: Freestanding, one-side operated.

Main Features

- Water mixing unit for hot and cold water.
- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Large stainless steel tap.


Construction

- 2 mm top in 1.4301 (AISI 304).
- IPX5 water resistance certification.
- Unit constructed according to DIN 18860_2 with 20 mm drop nose top and 70 mm recessed plinth.
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in stainless steel.

APPROVAL:



Modular Cooking Range Line thermaline 80 - Water mixing tap with knobs, 1 Side - H=800

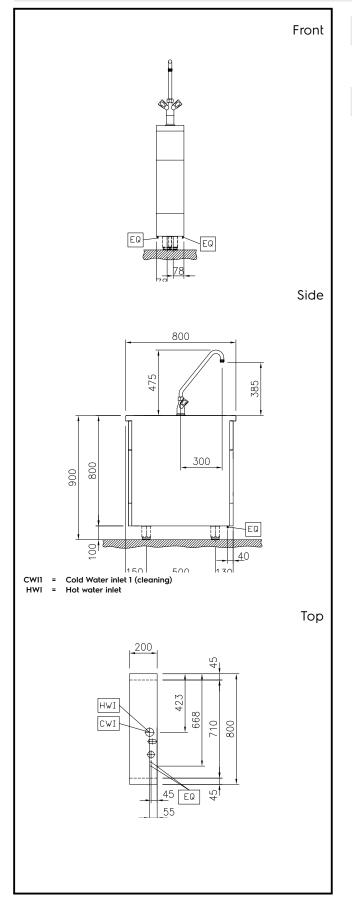

| w | \sim | te | r٠ |
|-----|--------|----|----|
| 7 7 | u | ᇉ | |

Inlet water line size: 3/4" Incoming Cold/hot Water line size: 3/4"

Key Information:

External dimensions, Width: 200 mm
External dimensions, Depth: 800 mm
External dimensions, Height: 800 mm
Net weight: 25 kg





Modular Cooking Range Line thermaline 80 - Water mixing tap with knobs, 1 Side - H=800

| Optional Accessories • Connecting rail kit, 800mm • Stainless steel side panel, | PNC 912500 PNC 912508 | | Stainless steel dividing panel, 800x800mm, (it should only be used between Electrolux Professional thermaline Modular 80 and | PNC 913669 | |
|---|--|---|--|------------|--|
| 800x800mm, freestanding Portioning shelf, 200mm width Portioning shelf, 200mm width Folding shelf, 300x800mm Folding shelf, 400x800mm Fixed side shelf, 200x800mm Fixed side shelf, 300x800mm Fixed side shelf, 400x800mm Stainless steel plinth, freestanding, 200mm width Connecting rail kit: modular 80 | PNC 912520 PNC 912550 PNC 912577 PNC 912578 PNC 912583 PNC 912584 PNC 912585 PNC 912819 PNC 912971 | | thermaline C80) • Stainless steel side panel, 800x800mm, flush-fitting (it should only be used against the wall, against a niche and in between Electrolux Professional thermaline and ProThermetic appliances and external appliances - provided that these have at least the same dimensions) | PNC 913685 | |
| (on the left) to ProThermetic tilting (on the right), ProThermetic stationary (on the left) to ProThermetic (on the right) | | | | | |
| Connecting rail kit: modular 80 (on the right) to ProThermetic tilting (on the left), ProThermetic stationary (on the right) to ProThermetic (on the left) | PNC 912972 | | | | |
| Endrail kit, flush-fitting, left | PNC 913109 | | | | |
| Endrail kit, flush-fitting, right | PNC 913110 | | | | |
| • Endrail kit (12.5mm) for thermaline 80 units, left | | _ | | | |
| • Endrail kit (12.5mm) for thermaline 80 units, right | | | | | |
| • Stainless steel side panel, left, h=800 | PNC 913216 | | | | |
| • Stainless steel side panel, right, h=800 | PNC 913217 | | | | |
| T-connection rail for back-to- back installations without backsplash (to be ordered as S- code) | PNC 913227 | u | | | |
| Insert profile D=800mm | PNC 913230 | | | | |
| • Endrail kit, (12.5mm), for back-to- back installation, left | PNC 913249 | | | | |
| Endrail kit, (12.5mm), for back-to- back installation, right | | | | | |
| Endrail kit, flush-fitting, for back- to-back installation, left | PNC 913253 | | | | |
| Endrail kit, flush-fitting, for back- to-back installation, right | PNC 913254 | | | | |
| Side reinforced panel only in combination with side shelf, for freestanding units | PNC 913257 | | | | |
| Side reinforced panel only in combination with side shelf, for back-to-back installations, left | PNC 913273 | | | | |
| Side reinforced panel only in combination with side shelf, for back-to-back installation, right | PNC 913274 | | | | |

