


Modular Cooking Range Line thermaline 80 - 100 mm Closed base, 1 Side - H=450

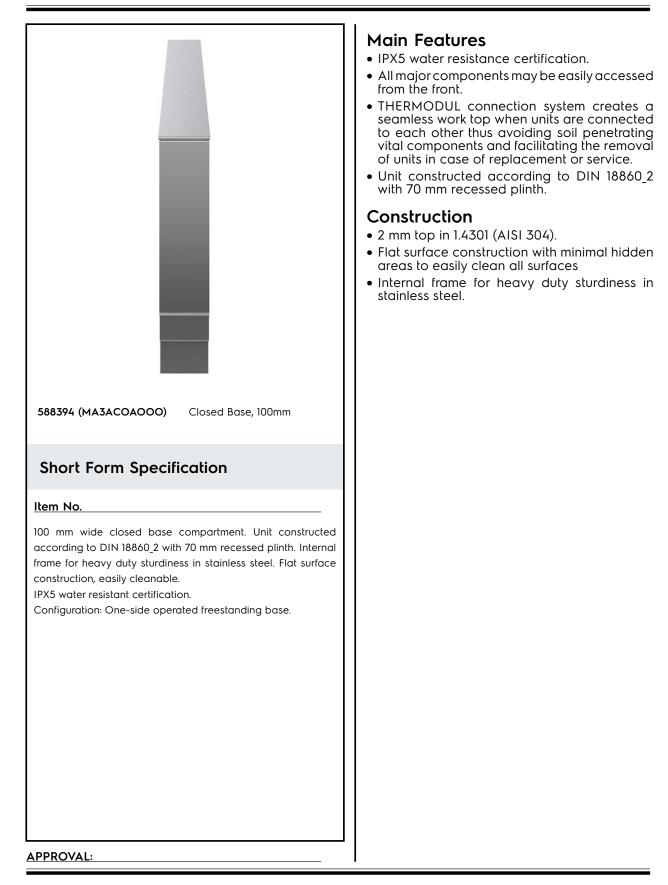

ITEM #	_
MODEL #	_
NAME #	_
<u>SIS #</u>	_
AIA #	_

Electrolux


Modular Cooking Range Line thermaline 80 - 100 mm Closed base, 1 Side - H=450

100 mm

800 mm

450 mm

8 kg

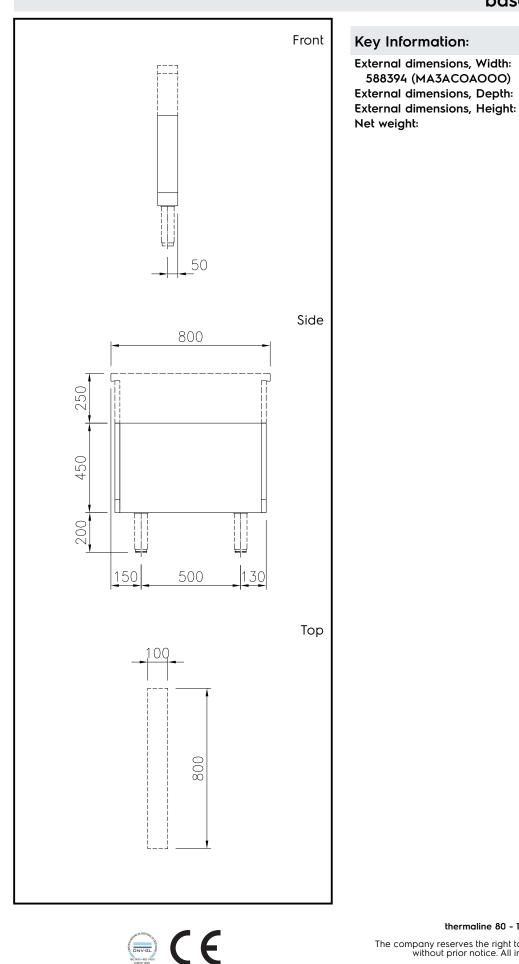

DNVGL

Modular Cooking Range Line thermaline 80 - 100 mm Closed base, 1 Side - H=450

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.



Optional Accessories

optional Accessories		
 Stainless steel side panel, 800x700mm, freestanding 	PNC 912509	
 Stainless steel panel, 800x700mm, against wall, left side 	PNC 913093	
• Stainless steel panel, 800x700m, against the wall, right side	PNC 913097	
 Back panel, 100x450mm, for bases one-side operated 	PNC 913160	
 Stainless steel side panel, left, H=700 	PNC 913214	
 Stainless steel side panel, right, H=700 	PNC 913215	
 Side reinforced panel only in combination with side shelf, for freestanding units 	PNC 913258	
• Side reinforced panel only in combination with side shelf, for against the wall installations, left	PNC 913263	
 Side reinforced panel only in combination with side shelf, for against the wall installations, right 	PNC 913265	
 Side reinforced panel only in combination with side shelf, for back-to-back installations, left 	PNC 913271	
 Side reinforced panel only in combination with side shelf, for back-to-back installation, right 	PNC 913272	
• Stainless steel dividing panel, 800x700mm, (it should only be used between Electrolux Professional thermaline Modular 80 and thermaline C80)	PNC 913668	
 Stainless steel side panel, 800x700mm, flush-fitting (it should only be used against the wall, against a niche and in between Electrolux Professional thermaline and ProThermetic appliances and external appliances - provided that these have at least the same dimensione) 	PNC 913684	

dimensions)

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.