Electrolux PROFESSIONAL

Modular Cooking Range Line thermaline 80 - 100 mm Closed base, 1 Side - H=450

ITEM #

MODEL #

NAME #

SIS #

AIA #

588394 (MA3ACOAOOO) Closed Base, 100mm

Short Form Specification

Item No.

100 mm wide closed base compartment. Internal frame for heavy duty sturdiness in stainless steel. Flat surface construction, easily cleanable.
IPX5 water resistant certification.
Configuration: One-side operated freestanding base.

Main Features

- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Unit constructed according to DIN 18860_2 with 70 mm recessed plinth.
- Closed base compartment to be installed below modular top units.

Construction

- IPX5 water resistance certification.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in stainless steel.

APPROVAL:

Modular Cooking Range Line thermaline 80 - 100 mm Closed base, 1 Side - H=450

Front



Side

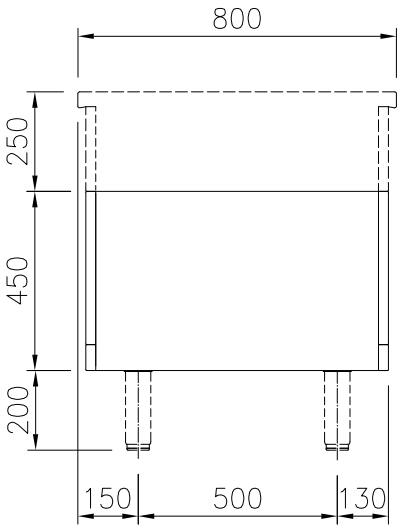

Top

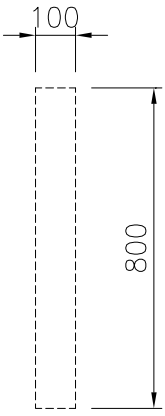

Key Information:

External dimensions, Width:	
588394 (MA3ACOAOOO)	100 mm
External dimensions, Depth:	800 mm
External dimensions, Height:	450 mm
Net weight:	8 kg

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2025.08.05

Optional Accessories

- Stainless steel side panel, 800x700mm, freestanding — PNC 912509 ❑
- Stainless steel panel, 800x700mm, against wall, left side — PNC 913093 ❑
- Stainless steel panel, 800x700m, against the wall, right side — PNC 913097 ❑
- Back panel, 100x450mm, for bases one-side operated — PNC 913160 ❑
- Stainless steel side panel, left, H=700 — PNC 913214 ❑
- Stainless steel side panel, right, H=700 — PNC 913215 ❑
- Side reinforced panel only in combination with side shelf, for freestanding units — PNC 913258 ❑
- Side reinforced panel only in combination with side shelf, for against the wall installations, left — PNC 913263 ❑
- Side reinforced panel only in combination with side shelf, for against the wall installations, right — PNC 913265 ❑
- Side reinforced panel only in combination with side shelf, for back-to-back installations, left — PNC 913271 ❑
- Side reinforced panel only in combination with side shelf, for back-to-back installation, right — PNC 913272 ❑
- Stainless steel dividing panel, 800x700mm, (it should only be used between Electrolux Professional thermaline Modular 80 and thermaline C80) — PNC 913668 ❑
- Stainless steel side panel, 800x700mm, flush-fitting (it should only be used against the wall, against a niche and in between Electrolux Professional thermaline and ProThermetic appliances and external appliances - provided that these have at least the same dimensions) — PNC 913684 ❑

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.