

Modular Cooking Range Line thermaline 85 - Electric Bain Marie Top, 1/1GN, 1 Side with Backsplash

ITEM # _____
 MODEL # _____
 NAME # _____
 SIS # _____
 AIA # _____



588552
 (MBBABBDOAO) Electric Bain-marie Top with rear tap, one-side operated with backsplash, 1/1 GN

Short Form Specification

Item No. _____

Unit constructed according to DIN 18860_2 with 20 mm drop nose top. Internal frame for heavy duty sturdiness in stainless steel. 2 mm top in 1.4301 (AISI 304). Flat surface construction, easily cleanable. THERMODUL connection system enables seamless worktop when units are connected and avoids soil penetrating. Water basin in 1.4435 (AISI 316L) stainless steel, seamlessly welded into the top of the appliance. Water temperature regulated by sensors. Safety systems and automatic low-water level shut-off protect against overheating. All-round basin raised edges to protect against soil infiltration. Metal knobs with embedded hygienic silicon "soft" grip enable easier handling and cleaning. IPX5 water resistance certification. Configuration: One side operated top with backsplash and rear mixing tap.

Main Features

- Filling water level is plate-marked on the side of the well.
- Overheat protection: the temperature sensor switches off the supply in case of overheating.
- Easy to clean basin with rounded corners.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Metal knobs with embedded hygienic "soft-touch" grip for easier handling and cleaning. The special design of the controls prevents infiltration of liquids or soil into vital components.
- Raised edge all around the well to protect from infiltration of dirt from worktop.
- Water temperature controlled by electronic sensor and can be selected as either temperature or power levels.
- Safety systems protect against overtemperature and can be manually reset.

Construction

- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in 1.4301 (AISI 304).
- Water basin in 1.4435 (AISI 316L) stainless steel is seamlessly welded into the top of the appliance.
- IPX5 water resistance certification.
- Unit constructed according to DIN 18860_2 with 20 mm drop nose top.

Sustainability

- Standby function for energy saving and fast recovery of maximum power.



APPROVAL: _____

Optional Accessories


• Connecting rail kit for appliances with backsplash, 850mm	PNC 912498	☐
• Portioning shelf, 400mm width	PNC 912522	☐
• Portioning shelf, 400mm width	PNC 912552	☐
• Folding shelf, 300x850mm	PNC 912579	☐
• Folding shelf, 400x850mm	PNC 912580	☐
• Fixed side shelf, 200x850mm	PNC 912586	☐
• Fixed side shelf, 300x850mm	PNC 912587	☐
• Fixed side shelf, 400x850mm	PNC 912588	☐
• Back panel, 400x700mm, for units with backsplash	PNC 913009	☐
• Endrail kit, flush-fitting, with backsplash, left	PNC 913115	☐
• Endrail kit, flush-fitting, with backsplash, right	PNC 913116	☐
• Lid for aquacooker 1/1 GN and bain marie 1/1 GN	PNC 913139	☐
• Endrail kit (12.5mm) for thermaline 85 units with backsplash, left	PNC 913206	☐
• Endrail kit (12.5mm) for thermaline 85 units with backsplash, right	PNC 913207	☐
• U-clamping rail for back-to-back installations with backsplash (to be ordered as S-code)	PNC 913226	☐
• Insert profile, d=850mm	PNC 913231	☐
• Energy optimizer kit 14A - factory fitted	PNC 913244	☐
• GN DIVIDER SET FOR BAIN MARIE	PNC 913297	☐
• Stainless steel side panel (12,5mm), 850x400mm, left side, wall mounted	PNC 913632	☐
• Stainless steel side panel (12,5mm), 850x400mm, right side, wall mounted	PNC 913633	☐
• Stainless steel side panel (12,5mm), 850x400mm, flush-fitting, left side, wall mounted	PNC 913634	☐
• Stainless steel side panel (12,5mm), 850x400mm, flush-fitting, right side, wall mounted	PNC 913635	☐
• Wall mounting kit top - TL85/90 - Factory Fitted	PNC 913648	☐
• Adapter Container in 1/1 GN Bain Marie	PNC 913657	☐
• Filter W=400mm	PNC 913663	☐
• Electric mains switch 25A 4mm ² NM for modular H800 electric units (factory fitted)	PNC 913676	☐




Electrolux
PROFESSIONAL

Modular Cooking Range Line thermaline 85 - Electric Bain Marie Top, 1/1GN, 1 Side with Backsplash

Front




Side



- D = Drain
DO = Overflow drain pipe
EI = Electrical inlet (power)
EQ = Equipotential screw
WI = Water inlet

Top

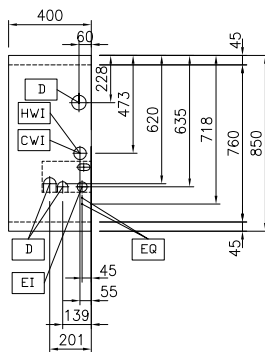

Electric

Supply voltage:	400 V/3N ph/50/60 Hz
Total Watts:	1.5 kW

Water:

Inlet water line size:	3/4"
Incoming Cold/hot Water line size:	3/4"
Drain line size:	1"

Key Information:

Number of wells:	1
Usable well dimensions (width):	307 mm
Usable well dimensions (height):	170 mm
Usable well dimensions (depth):	509 mm
Well capacity:	5 lt MIN; 32 lt MAX
Thermostat Range:	30 °C MIN; 90 °C MAX
External dimensions, Width:	400 mm
External dimensions, Depth:	850 mm
External dimensions, Height:	250 mm
Net weight:	20 kg
Configuration:	One-Side Operated;Top

Sustainability

Current consumption:	3.8 Amps
----------------------	----------



Modular Cooking Range Line
thermaline 85 - Electric Bain Marie Top, 1/1GN, 1 Side with Backsplash

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2025.11.19