



Modular Cooking Range Line thermaline 85 - Electric Warming Plate Top, 1 Side with Backsplash



588557
(MBRBBBJOBO)

Electric Warming Plate, 1-sided operated with
backsplash, 2/1 GN

ITEM # _____
MODEL # _____
NAME # _____
SIS # _____
AIA # _____

Main Features

- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Metal knobs with embedded hygienic "soft-touch" grip for easier handling and cleaning. The special design of the controls prevents infiltration of liquids or soil into vital components.
- Fast deployment with full heating power immediately.
- The smooth glass-ceramic surface can be quickly and easily cleaned, thus providing maximum hygiene.
- Almost the entire surface of the ceramic plate can be used without "dead" spots.
- Pans can easily be moved from one area to another without lifting.
- All major components may be easily accessed from the front.
- Overheat protection via a temperature sensor that switches off part of the heating element in the event of over temperature. Temperature range from 30°C to 110°C.

Construction

- 2 mm top in 1.4301 (AISI 304).
- Unit constructed according to DIN 18860_2 with 20 mm drop nose top and 70 mm recessed plinth.
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in 1.4301 (AISI 304).
- Unit constructed according to DIN 18860_2 with 20 mm drop nose top.
- IPX5 water resistance certification.

Optional Accessories

• Scraper for cook tops	PNC 910601	<input type="checkbox"/>
• Connecting rail kit for appliances with backsplash, 850mm	PNC 912498	<input type="checkbox"/>
• Portioning shelf, 1000mm width	PNC 912528	<input type="checkbox"/>
• Portioning shelf, 1000mm width	PNC 912558	<input type="checkbox"/>
• Folding shelf, 300x850mm	PNC 912579	<input type="checkbox"/>
• Folding shelf, 400x850mm	PNC 912580	<input type="checkbox"/>
• Fixed side shelf, 200x850mm	PNC 912586	<input type="checkbox"/>
• Fixed side shelf, 300x850mm	PNC 912587	<input type="checkbox"/>
• Fixed side shelf, 400x850mm	PNC 912588	<input type="checkbox"/>
• Back panel, 1000x700mm, for units with backsplash	PNC 913015	<input type="checkbox"/>
• Endrail kit, flush-fitting, with backsplash, left	PNC 913115	<input type="checkbox"/>
• Endrail kit, flush-fitting, with backsplash, right	PNC 913116	<input type="checkbox"/>
• Endrail kit (12.5mm) for thermaline 85 units with backsplash, left	PNC 913206	<input type="checkbox"/>
• Endrail kit (12.5mm) for thermaline 85 units with backsplash, right	PNC 913207	<input type="checkbox"/>

APPROVAL: _____



Experience the Excellence
www.electroluxprofessional.com



Modular Cooking Range Line thermaline 85 - Electric Warming Plate Top, 1 Side with Backsplash

- U-clamping rail for back-to-back installations with backsplash (to be ordered as S-code)
- Insert profile, d=850mm
- Filter W=1000mm

PNC 913226
PNC 913231
PNC 913666



Modular Cooking Range Line
thermaline 85 - Electric Warming Plate Top, 1 Side with Backsplash


The company reserves the right to make modifications to the products
without prior notice. All information correct at time of printing.

2026.02.11



Electrolux
PROFESSIONAL

Modular Cooking Range Line thermaline 85 - Electric Warming Plate Top, 1 Side with Backsplash

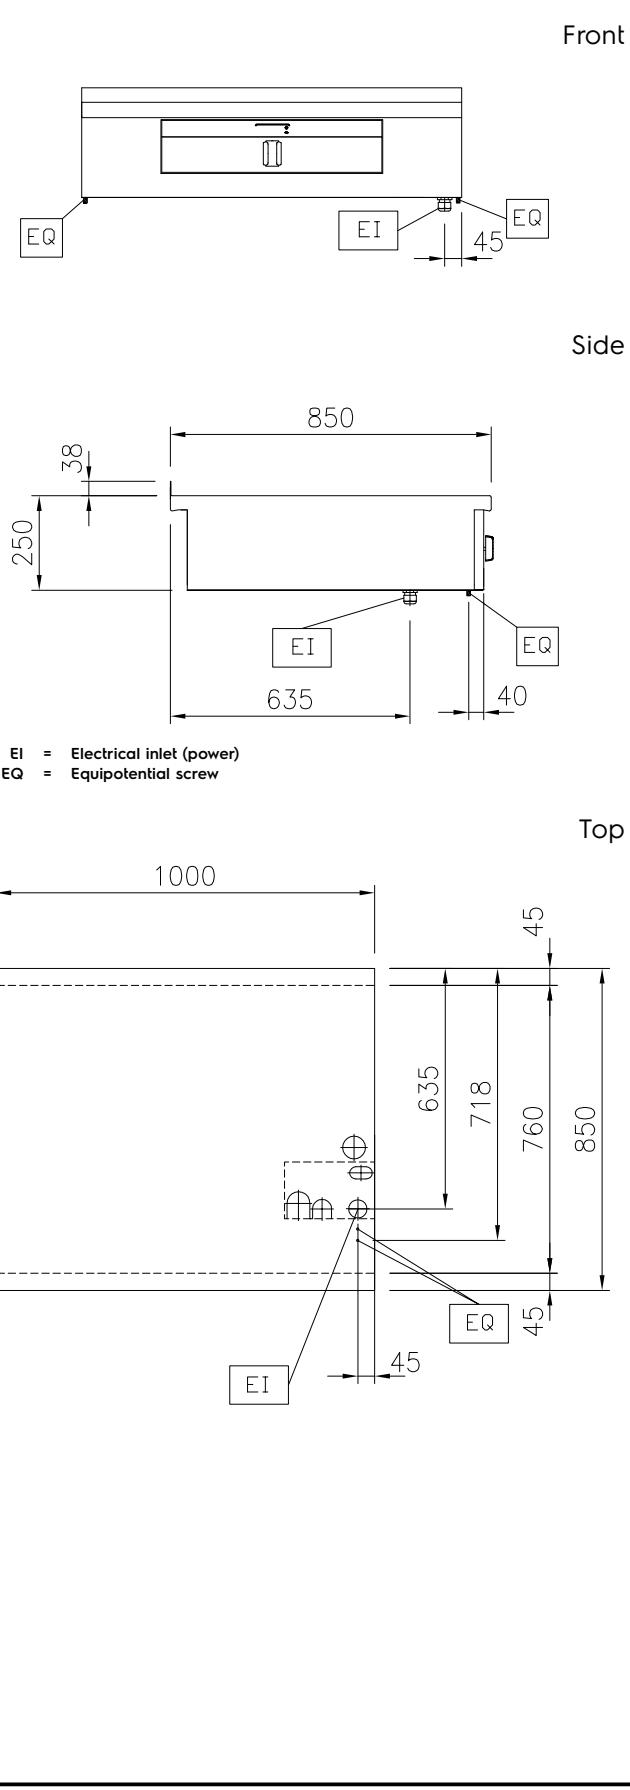

Electric

Supply voltage: 230 V/1N ph/50/60 Hz
Total Watts: 0.95 kW

Key Information:

External dimensions, Width:	1000 mm
External dimensions, Depth:	850 mm
External dimensions, Height:	250 mm
Net weight:	40 kg
Configuration:	One-Side Operated;Top
Front Plates Power:	0 - 0 kW
Front Plates dimensions:	

Sustainability

Current consumption: 4.13 Amps