

**Modular Cooking Range Line** thermaline 85 - 400 mm Open base, GN conform, 1 Side (H2)

ITEM #
MODEL #
NAME #
SIS #
AIA#



588572 (MBIBCADOOO)

Open Base, one-side operated, GN - H2

## **Short Form Specification**

#### Item No.

400 mm wide open base compartment to store pots, pans, sheet pans, etc. with hygienic design and round edges. Internal frame for heavy duty sturdiness in stainless steel. Flat surface construction, easily cleanable. Open storage space in the base accepts GN 1/1 containers. IPX5 water resistant certification.

Configuration: One side operated freestanding base, hygienic class

#### Main Features

- All major components may be easily accessed from the front.
- Unit to be placed below modular top appliances to store pots, pans, sheet pans, etc.

### Construction

- Hygienic design of the open base compartment with large round edges.
- 2 mm top in 1.4301 (AISI 304).
- IPX5 water resistance certification.
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Storage space in the base of the appliance that can accept GN1/1 containers.
- Internal frame for heavy duty sturdiness in stainless steel.

## Optional Accessories

used between Electrolux Professional thermaline Modular

85 and thermaline C85)

Stainless steel front kicking strip, PNC 912630 🗆 400mm width Stainless steel side kicking strip PNC 912659 📮 left and right, wall mounted, 850mm width PNC 912662 📮 Stainless steel side kicking strip left and right, back-to-back, 1700mm width PNC 913003 📮 Stainless steel side panel, 850x700mm, right side, against Stainless steel side panel, PNC 913004 📮 850x700mm, left side, against PNC 913233 🚨 Perforated shelf for warming cabinets and cupboard bases (one-side operated TL80-85-90 and two-side operated for TL80) Side reinforced panel only in PNC 913261 🔲 combination with side shelf, for against the wall installations, right • Side reinforced panel only in PNC 913262 🔲 combination with side shelf, for against the wall installations, left Shelf fixation for TL80-85-90 one- PNC 913279 side operated, TL80 two-side operated Stainless steel dividing panel, PNC 913670 🗅 850x700mm, (it should only be

#### APPROVAL:






# Modular Cooking Range Line thermaline 85 - 400 mm Open base, GN conform, 1 Side (H2)

• Stainless steel side panel, 850x700mm, PNC 913686 flush-fitting (it should only be used against the wall, against a niche and in between Electrolux Professional thermaline and ProThermetic appliances and external appliances - provided that these have at least the same dimensions)



# Modular Cooking Range Line thermaline 85 - 400 mm Open base, GN conform, 1 Side (H2)

17 kg

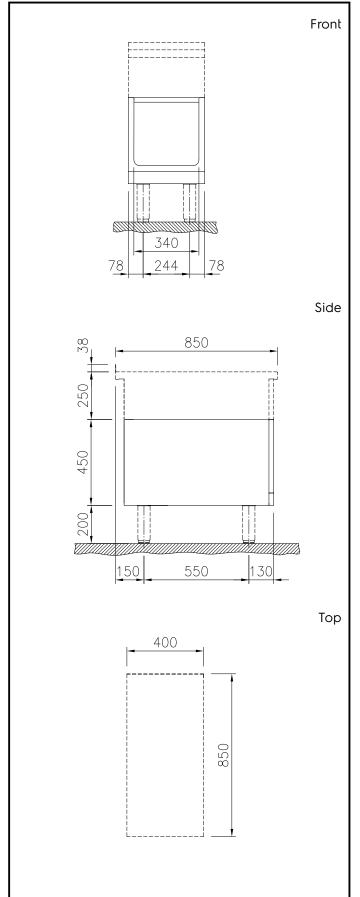

## **Key Information:**

Net weight:

External dimensions, Width:
588572 (MB1BCADOOO)
External dimensions, Depth:
External dimensions, Height:
Cupboard Cavity Dimensions (width):
Cupboard Cavity Dimensions (height):
Cupboard Cavity Dimensions (height):

Cupboard Cavity Dimensions (depth):
740 mm

Modular Cooking Range Line thermaline 85 - 400 mm Open base, GN conform, 1 Side (H2)