

Modular Cooking Range Line thermaline 85 - 1500 mm Open base, 1 Side (H2)

ITEM #		
MODEL #		
NAME #		
SIS #		
AIA #		



588576 (MB1ACALOOO)

Open Base, one-side operated - H2

Short Form Specification

Item No.

1500 mm wide open base compartment to store pots, pans, sheet pans, etc. with hygienic design and round edges. Unit constructed according to DIN 18860_2 with 70 mm recessed plinth. Internal frame for heavy duty sturdiness in stainless steel. Flat surface construction, easily cleanable.

IPX5 water resistant certification.

Configuration: One side operated freestanding base, hygienic class H2

Main Features

- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- IPX5 water resistance certification.
- Open base compartment for storage of pots, pans, sheet pans, etc.
- Unit constructed according to DIN 18860_2 with 70 mm recessed plinth.

Construction

- Hygienic design of the open base compartment with large round edges.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in stainless steel.

Optional Accessories

85 and thermaline C85)

Optional Accessories		
• Stainless steel front kicking strip, 1500mm width	PNC 912641	
 Stainless steel side kicking strip left and right, wall mounted, 850mm width 	PNC 912659	
 Stainless steel side kicking strip left and right, back-to-back, 1700mm width 	PNC 912662	
Stainless steel side panel, 850x700mm, right side, against wall	PNC 913003	
 Stainless steel side panel, 850x700mm, left side, against wall 	PNC 913004	
 Perforated shelf for warming cabinets and cupboard bases (one-side operated TL80-85-90 and two-side operated for TL80) 	PNC 913239	
 Side reinforced panel only in combination with side shelf, for against the wall installations, right 	PNC 913261	
Side reinforced panel only in combination with side shelf, for against the wall installations, left	PNC 913262	
 Shelf fixation for TL80-85-90 one- side operated, TL80 two-side operated 	PNC 913279	
Stainless steel dividing panel, 850x700mm, (it should only be used between Electrolux Professional thermaline Modular	PNC 913670	

APPROVAL:






Modular Cooking Range Line thermaline 85 - 1500 mm Open base, 1 Side (H2)

• Stainless steel side panel, 850x700mm, PNC 913686 flush-fitting (it should only be used against the wall, against a niche and in between Electrolux Professional thermaline and ProThermetic appliances and external appliances - provided that these have at least the same dimensions)



Modular Cooking Range Line thermaline 85 - 1500 mm Open base, 1 Side (H2)

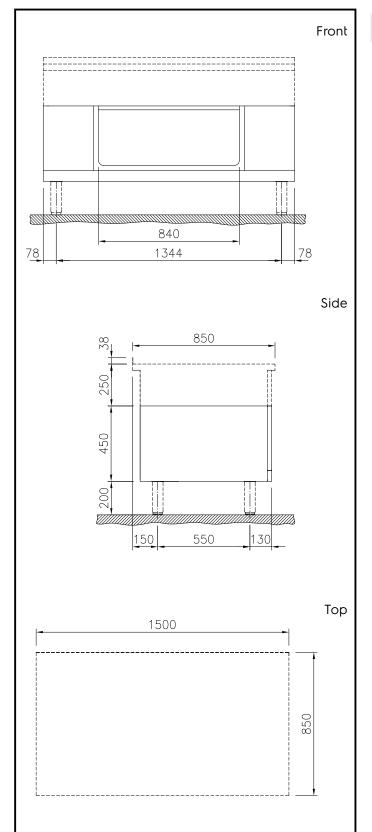

Key Information:

External dimensions, Width:

588576 (MBIACALOOO) 1500 mm **External dimensions, Depth:** 850 mm **External dimensions, Height:** 450 mm **Cupboard Cavity Dimensions**

(width):

840 mm

Cupboard Cavity Dimensions

(height):

330 mm

Cupboard Cavity Dimensions (depth):

740 mm 28 kg

Net weight:

Modular Cooking Range Line thermaline 85 - 1500 mm Open base, 1 Side (H2)