


Modular Cooking Range Line thermaline 85 - 1500 mm Open base, 1 Side (H2)

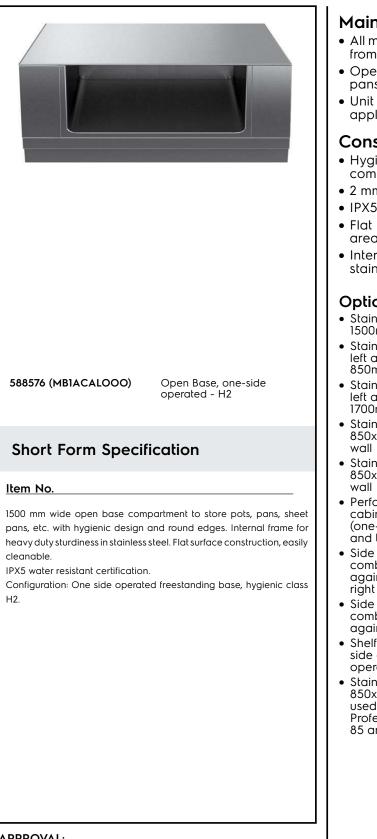

# ITEM # MODEL # NAME # SIS # AIA #

### Main Features

- All major components may be easily accessed from the front.
- Open base compartment for storage of pots, pans, sheet pans, etc.
- Unit to be placed below modular top appliances to store pots, pans, sheet pans, etc.

### Construction

- Hygienic design of the open base compartment with large round edges.
- 2 mm top in 1.4301 (AISI 304).
- IPX5 water resistance certification.
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in stainless steel.

#### **Optional Accessories**

• Stainless steel front kicking strip, 1500mm width	PNC 912641	
<ul> <li>Stainless steel side kicking strip left and right, wall mounted, 850mm width</li> </ul>	PNC 912659	
<ul> <li>Stainless steel side kicking strip left and right, back-to-back, 1700mm width</li> </ul>	PNC 912662	
<ul> <li>Stainless steel side panel, 850x700mm, right side, against wall</li> </ul>	PNC 913003	
<ul> <li>Stainless steel side panel, 850x700mm, left side, against wall</li> </ul>	PNC 913004	
<ul> <li>Perforated shelf for warming cabinets and cupboard bases (one-side operated TL80-85-90 and two-side operated for TL80)</li> </ul>	PNC 913239	
<ul> <li>Side reinforced panel only in combination with side shelf, for against the wall installations, right</li> </ul>	PNC 913261	
• Side reinforced panel only in combination with side shelf, for against the wall installations, left	PNC 913262	
<ul> <li>Shelf fixation for TL80-85-90 one- side operated, TL80 two-side operated</li> </ul>	PNC 913279	
<ul> <li>Stainless steel dividing panel, 850x700mm, (it should only be used between Electrolux Professional thermaline Modular 85 and thermaline C85)</li> </ul>	PNC 913670	


#### APPROVAL:



 Stainless steel side panel, 850x700mm, PNC 913686
 flush-fitting (it should only be used against the wall, against a niche and in between Electrolux Professional thermaline and ProThermetic appliances and external appliances provided that these have at least the same dimensions)



## Modular Cooking Range Line thermaline 85 - 1500 mm Open base, 1 Side (H2)

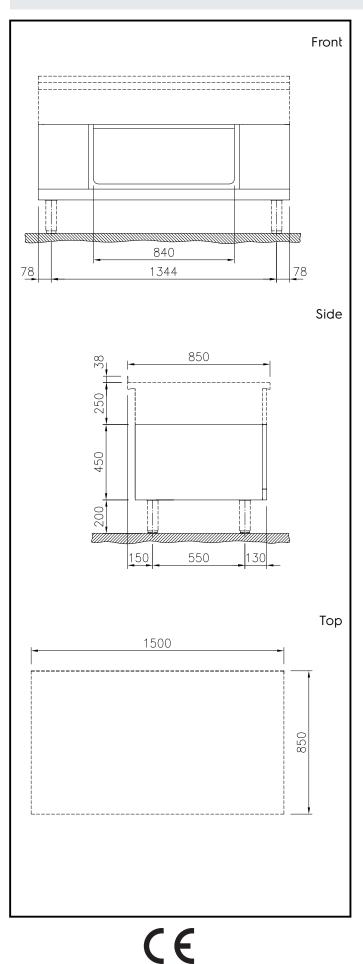

### Key Information:

External dimensions, Width:588576 (MBIACALOOO)1500 mmExternal dimensions, Depth:850 mmExternal dimensions, Height:450 mmCupboard Cavity Dimensions (height):840 mmCupboard Cavity Dimensions (height):330 mmCupboard Cavity Dimensions (depth):740 mmNet weight:28 kg		
External dimensions, Depth:850 mmExternal dimensions, Height:450 mmCupboard Cavity Dimensions (width):840 mmCupboard Cavity Dimensions (height):330 mmCupboard Cavity Dimensions (depth):740 mm	External dimensions, Width:	
External dimensions, Height: Cupboard Cavity Dimensions (width):450 mmCupboard Cavity Dimensions (height):840 mmCupboard Cavity Dimensions (height):330 mmCupboard Cavity Dimensions (depth):740 mm	588576 (MB1ACALOOO)	1500 mm
Cupboard Cavity Dimensions (width):840 mmCupboard Cavity Dimensions (height):330 mmCupboard Cavity Dimensions (depth):740 mm	External dimensions, Depth:	850 mm
(width):840 mmCupboard Cavity Dimensions (height):330 mmCupboard Cavity Dimensions (depth):740 mm	External dimensions, Height:	450 mm
(height):330 mmCupboard Cavity Dimensions (depth):740 mm		840 mm
(depth): 740 mm		330 mm
<b>3</b>	(depth):	
		- 3

Modular Cooking Range Line thermaline 85 - 1500 mm Open base, 1 Side (H2)

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.