

Modular Cooking Range Line thermaline 85 - 600 mm Open base, GN conform, 1 Side (H2)

ITEM #	
MODEL #	
NAME #	
SIS #	
AIA #	



588578 (MB1BCAFOOO)

Open Base, one-side operated, GN - H2

Short Form Specification

Item No.

600 mm wide open base compartment to store pots, pans, sheet pans, etc. with hygienic design and round edges. Unit constructed according to DIN 18860_2 with 70 mm recessed plinth.. Internal frame for heavy duty sturdiness in stainless steel. Flat surface construction, easily cleanable. Open storage space in the base accepts GN 1/1 containers. IPX5 water resistant certification.

Configuration: One side operated freestanding base, hygienic class H2

Main Features

- All major components may be easily accessed from the front.
- Unit to be placed below modular top appliances to store pots, pans, sheet pans, etc.

Construction

- Storage space in the base of the appliance that can accept GN1/1 containers.
- Hygienic design of the open base compartment with large round edges.
- IPX5 water resistance certification.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in stainless steel.

Optional Accessories

used between Electrolux Professional thermaline Modular

85 and thermaline C85)

•	phonai Accessories			
•	Stainless steel front kicking strip, 600mm width	PNC 9	12632	
•	Stainless steel side kicking strip left and right, wall mounted, 850mm width	PNC 9	12659	
•	Stainless steel side kicking strip left and right, back-to-back, 1700mm width	PNC 9	12662	
•	Stainless steel side panel, 850x700mm, right side, against wall	PNC 9	13003	
•	Stainless steel side panel, 850x700mm, left side, against wall	PNC 9	13004	
•	Perforated shelf for warming cabinets and cupboard bases (one-side operated TL80-85-90 and two-side operated for TL80)	PNC 9	13233	
•	Side reinforced panel only in combination with side shelf, for against the wall installations, right	PNC 9	13261	
•	Side reinforced panel only in combination with side shelf, for against the wall installations, left	PNC 9	13262	
•	Shelf fixation for TL80-85-90 one- side operated, TL80 two-side operated	PNC 9	13279	
•	Stainless steel dividing panel,	PNC 9	13670	

APPROVAL:






Modular Cooking Range Line thermaline 85 - 600 mm Open base, GN conform, 1 Side (H2)

• Stainless steel side panel, 850x700mm, PNC 913686 flush-fitting (it should only be used against the wall, against a niche and in between Electrolux Professional thermaline and ProThermetic appliances and external appliances - provided that these have at least the same dimensions)



Modular Cooking Range Line thermaline 85 - 600 mm Open base, GN conform, 1 Side (H2)

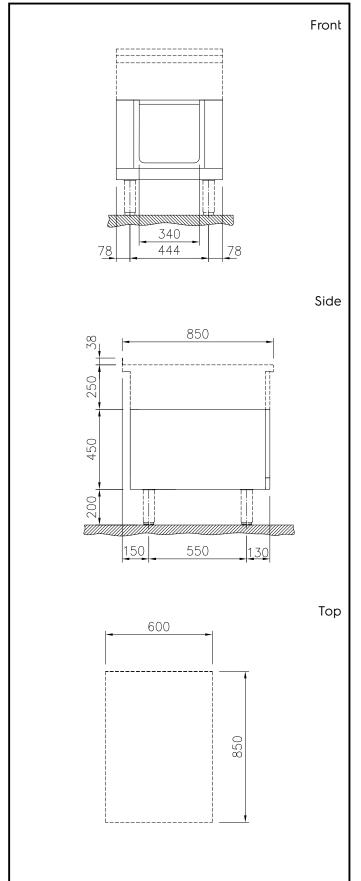

Key Information:

External dimensions, Width: 588578 (MBIBCAFOOO) 600 mm External dimensions, Depth: 850 mm External dimensions, Height: 450 mm **Cupboard Cavity Dimensions** 340 mm **Cupboard Cavity Dimensions** 330 mm **Cupboard Cavity Dimensions** 740 mm (depth): Net weight: 19 kg

> Modular Cooking Range Line thermaline 85 - 600 mm Open base, GN conform, 1 Side (H2)