

Modular Cooking Range Line thermaline 85 - 500 mm Cupboard base with 1 door, GN conform, 1 Side (H2)

ITEM #		
MODEL #		
NAME #		
SIS #		
AIA #		



588581 (MBIDCAEOOO)

Cupboard Base with 1 door, one-side operated, GN - H2

# **Short Form Specification**

#### Item No.

500 mm wide cupboard base with 1 door Internal frame for heavy duty sturdiness in stainless steel. Flat surface construction, easily cleanable. Cupboard storage space accepts GN 1/1 containers. IPX5 water resistant certification.

Configuration: One side operated freestanding base, hygienic class

#### **Main Features**

- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Cupboard compartment for storage of pots, pans, sheet pans etc.
- Unit constructed according to DIN 18860\_2 with 70 mm recessed plinth.

### Construction

- Hygienic design of the base cupboard with large round edges.
- IPX5 water resistance certification.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Storage space in the base of the appliance accepts GN1/1 containers.
- Internal frame for heavy duty sturdiness in stainless steel.

## **Optional Accessories**

operated

•	Stainless steel front kicking strip, 500mm width	PNC 912631	
•	Stainless steel side kicking strip left and right, wall mounted, 850mm width	PNC 912659	
•	Stainless steel side kicking strip left and right, back-to-back, 1700mm width	PNC 912662	
•	Stainless steel side panel, 850x700mm, right side, against wall	PNC 913003	
•	Stainless steel side panel, 850x700mm, left side, against wall	PNC 913004	
•	Perforated shelf for warming cabinets and cupboard bases (one-side operated TL80-85-90 and two-side operated for TL80)	PNC 913233	
•	Side reinforced panel only in combination with side shelf, for against the wall installations, right	PNC 913261	
•	Side reinforced panel only in combination with side shelf, for against the wall installations, left	PNC 913262	
•	Shelf fixation for TL80-85-90 one- side operated, TL80 two-side	PNC 913279	

#### APPROVAL:





# Modular Cooking Range Line thermaline 85 - 500 mm Cupboard base with 1 door, GN conform, 1 Side (H2)


•	Stainless steel dividing panel,	F
	850x700mm, (it should only be used	
	between Electrolux Professional	
	thermaline Modular 85 and thermaline	
	C85)	

PNC 913670 

 Stainless steel side panel, 850x700mm, PNC 913686 flush-fitting (it should only be used against the wall, against a niche and in between Electrolux Professional thermaline and ProThermetic appliances and external appliances provided that these have at least the same dimensions)



## Modular Cooking Range Line thermaline 85 - 500 mm Cupboard base with 1 door, GN conform, 1 Side (H2)

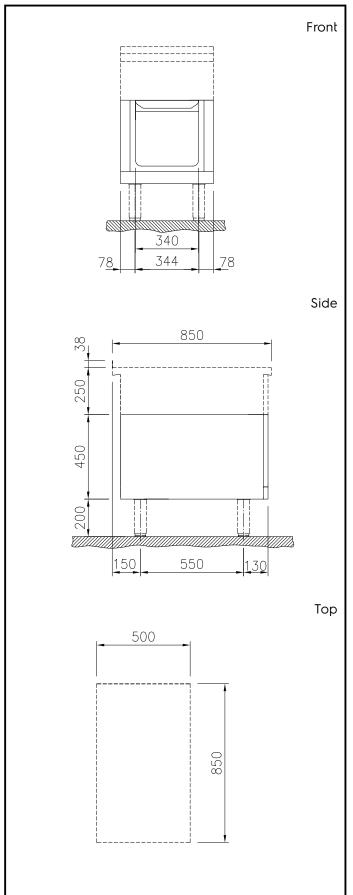

## **Key Information:**

External dimensions, Width:

**588581 (MBIDCAEOOO)** 500 mm **External dimensions, Depth:** 850 mm **External dimensions, Height:** 450 mm

**Cupboard Cavity Dimensions** 

340 mm

**Cupboard Cavity Dimensions** 

330 mm

**Cupboard Cavity Dimensions** 

715 mm

(depth): Net weight:

22 kg