

Modular Cooking Range Line thermaline 85 - 600 mm Cupboard base with 1 door, GN conform, 1 Side (H2)

ITEM #		
MODEL #		
NAME #		
_		
SIS #		
AIA #		



588582 (MB1DCAFOOO)

Cupboard Base with 1 door, one-side operated, GN - H2

Short Form Specification

Item No.

600 mm wide cupboard base with 1 door Internal frame for heavy duty sturdiness in stainless steel. Flat surface construction, easily cleanable. Cupboard storage space accepts GN 1/1 containers. IPX5 water resistant certification.

Configuration: One side operated freestanding base, hygienic class H2.

Main Features

- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Unit constructed according to DIN 18860_2 with 70 mm recessed plinth.
- Cupboard compartment for storage of pots, pans, sheet pans etc.

Construction

- Hygienic design of the base cupboard with large round edges.
- 2 mm top in 1.4301 (AISI 304).
- IPX5 water resistance certification.
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Storage space in the base of the appliance accepts GN1/1 containers.
- Internal frame for heavy duty sturdiness in stainless steel.

Optional Accessories

operated

•	Stainless steel front kicking strip, 600mm width	PNC 912632	
•	Stainless steel side kicking strip left and right, wall mounted, 850mm width	PNC 912659	
•	Stainless steel side kicking strip left and right, back-to-back, 1700mm width	PNC 912662	
•	Stainless steel side panel, 850x700mm, right side, against wall	PNC 913003	
•	Stainless steel side panel, 850x700mm, left side, against wall	PNC 913004	
•	Perforated shelf for warming cabinets and cupboard bases (one-side operated TL80-85-90 and two-side operated for TL80)	PNC 913233	
•	Side reinforced panel only in combination with side shelf, for against the wall installations, right	PNC 913261	
•	Side reinforced panel only in combination with side shelf, for against the wall installations, left	PNC 913262	
•	Shelf fixation for TL80-85-90 one- side operated, TL80 two-side	PNC 913279	

APPROVAL:





Modular Cooking Range Line thermaline 85 - 600 mm Cupboard base with 1 door, GN conform, 1 Side (H2)

 Stainless steel dividing panel, 850x700mm, (it should only be used between Electrolux Professional thermaline Modular 85 and thermaline C85) 	
(65)	


IC 913670

 Stainless steel side panel, 850x700mm, PNC 913686 flush-fitting (it should only be used against the wall, against a niche and in between Electrolux Professional

The professional of thermaline and ProThermetic appliances and external appliances provided that these have at least the same dimensions)



Modular Cooking Range Line thermaline 85 - 600 mm Cupboard base with 1 door, GN conform, 1 Side (H2)

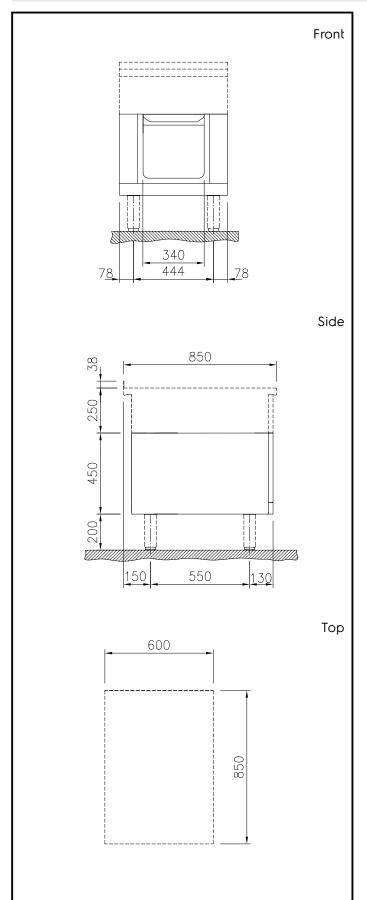

Key Information:

External dimensions, Width: 588582 (MBIDCAFOOO)

600 mm External dimensions, Depth: 850 mm External dimensions, Height: 450 mm

Cupboard Cavity Dimensions (width):

340 mm

Cupboard Cavity Dimensions

330 mm

Cupboard Cavity Dimensions (depth):

715 mm

23 kg

Net weight: