

Modular Cooking Range Line thermaline 85 - 1000 mm Cupboard base with 2 doors, GN conform, 1 Side (H2)

ITEM #	
MODEL #	
NAME #	
SIS #	_
AIA #	_



588583 (MBIFCAJOOO)

Cupboard Base with 2 doors, one-side operated, GN - H2

Short Form Specification

Item No.

1000 mm wide cupboard base with 2 doors Internal frame for heavy duty sturdiness in stainless steel. Flat surface construction, easily cleanable. Cupboard storage space accepts GN 1/1 containers. IPX5 water resistant certification.

Configuration: One side operated freestanding base, hygienic class

Main Features

- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Cupboard compartment for storage of pots, pans, sheet pans etc.
- Unit constructed according to DIN 18860_2 with 70 mm recessed plinth.

Construction

- Hygienic design of the base cupboard with large round edges.
- 2 mm top in 1.4301 (AISI 304).
- IPX5 water resistance certification.
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in stainless steel.

Optional Accessories

•	Stainless steel front kicking strip, 1000mm width	PNC 912636	
•	Stainless steel side kicking strip left and right, wall mounted, 850mm width	PNC 912659	
•	Stainless steel side kicking strip left and right, back-to-back, 1700mm width	PNC 912662	
•	Stainless steel side panel, 850x700mm, right side, against wall	PNC 913003	
•	Stainless steel side panel, 850x700mm, left side, against wall	PNC 913004	
•	Perforated shelf for warming cabinets and cupboard bases (one-side operated TL80-85-90 and two-side operated for TL80)	PNC 913235	
•	Side reinforced panel only in combination with side shelf, for against the wall installations, right	PNC 913261	
•	Side reinforced panel only in combination with side shelf, for against the wall installations, left	PNC 913262	
•	Shelf fixation for TL80-85-90 one- side operated, TL80 two-side operated	PNC 913283	
•	Stainless steel dividing panel, 850x700mm, (it should only be used between Flectrolux	PNC 913670	

Professional thermaline Modular

85 and thermaline C85)

APPROVAL:






Modular Cooking Range Line thermaline 85 - 1000 mm Cupboard base with 2 doors, GN conform, 1 Side (H2)

 Stainless steel side panel, 850x700mm, PNC 913686 flush-fitting (it should only be used against the wall, against a niche and in between Electrolux Professional thermaline and ProThermetic appliances and external appliances - provided that these have at least the provided that these have at least the same dimensions)



Modular Cooking Range Line thermaline 85 - 1000 mm Cupboard base with 2 doors, GN conform, 1 Side (H2)

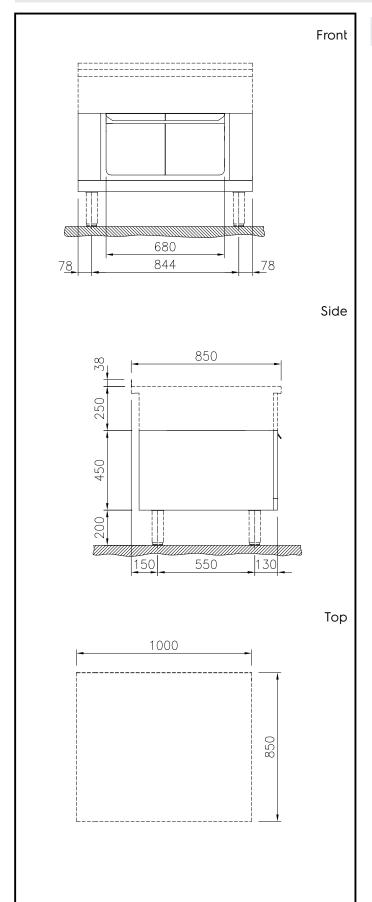

Key Information:

External dimensions, Width:

588583 (MBIFCAJOOO) 1000 mm **External dimensions, Depth:** 850 mm **External dimensions, Height:** 450 mm

Cupboard Cavity Dimensions (width):

680 mm

Cupboard Cavity Dimensions (height):

330 mm

Cupboard Cavity Dimensions

715 mm

31 kg

(depth): Net weight:

Modular Cooking Range Line
thermaline 85 - 1000 mm Cupboard base with 2 doors, GN conform, 1
Side (H2)
The company reserves the right to make modifications to the products
without prior notice. All information correct at time of printing.