

Modular Cooking Range Line thermaline 85 - 800 mm Cupboard base with 2 doors, GN conform, 1 Side (H2)

ITEM #		
MODEL #		
NAME #		
SIS #		
AIA#		



588584 (MB1FCAHOOO)

Cupboard Base with 2 doors, one-side operated, GN - H2

Short Form Specification

Item No.

800 mm wide cupboard base with 2 doors Internal frame for heavy duty sturdiness in stainless steel. Flat surface construction, easily cleanable. Cupboard storage space accepts GN 1/1 containers. IPX5 water resistant certification.

Configuration: One side operated freestanding base, hygienic class

Main Features

- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Cupboard compartment for storage of pots, pans, sheet pans etc.
- Unit constructed according to DIN 18860_2 with 70 mm recessed plinth.

Construction

- Hygienic design of the base cupboard with large round edges.
- IPX5 water resistance certification.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Storage space in the base of the appliance accepts GN1/1 containers.
- Internal frame for heavy duty sturdiness in stainless steel.

Optional Accessories

 Stainless steel front kicking strip, 800mm width 	PNC 912634	
 Stainless steel side kicking strip left and right, wall mounted, 850mm width 	PNC 912659	
 Stainless steel side kicking strip left and right, back-to-back, 1700mm width 	PNC 912662	
 Stainless steel side panel, 850x700mm, right side, against wall 	PNC 913003	
 Stainless steel side panel, 850x700mm, left side, against wall 	PNC 913004	
 Perforated shelf for warming cabinets and cupboard bases (one-side operated TL80-85-90 and two-side operated for TL80) 	PNC 913234	
 Side reinforced panel only in combination with side shelf, for against the wall installations, right 	PNC 913261	
 Side reinforced panel only in combination with side shelf, for against the wall installations, left 	PNC 913262	
 Shelf fixation for TL80-85-90 one- side operated, TL80 two-side operated 	PNC 913281	

APPROVAL:





Modular Cooking Range Line thermaline 85 - 800 mm Cupboard base with 2 doors, GN conform, 1 Side (H2)


•	Stainless steel dividing panel,
	850x700mm, (it should only be used
	between Electrolux Professional
	thermaline Modular 85 and thermaline
	C85)

PNC 913670

 Stainless steel side panel, 850x700mm, PNC 913686 flush-fitting (it should only be used against the wall, against a niche and in between Electrolux Professional thermaline and ProThermetic appliances and external appliances provided that these have at least the same dimensions)



Modular Cooking Range Line thermaline 85 - 800 mm Cupboard base with 2 doors, GN conform, 1 Side (H2)

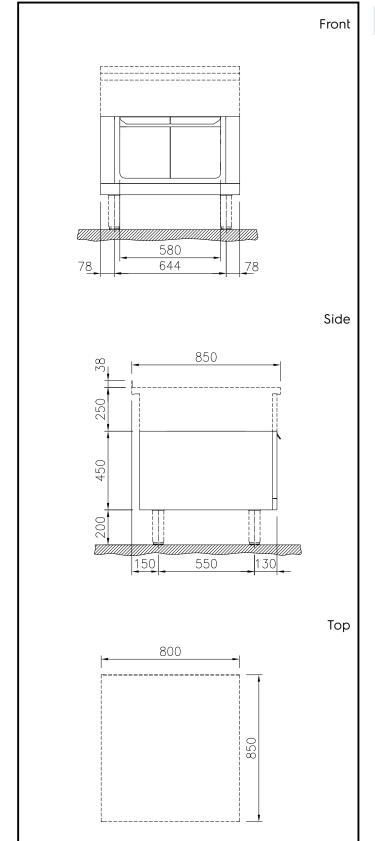

Key Information:

External dimensions, Width: 588584 (MB1FCAHOOO)

800 mm 850 mm

External dimensions, Depth: External dimensions, Height: 450 mm **Cupboard Cavity Dimensions**

580 mm

(width): **Cupboard Cavity Dimensions**

330 mm

Cupboard Cavity Dimensions

715 mm

(depth): Net weight:

29 kg

Modular Cooking Range Line thermaline 85 - 800 mm Cupboard base with 2 doors, GN conform, 1 Side (H2) The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.