



Modular Cooking Range Line
thermaline 85 - Electric Freestanding
Multi Braiser, 1/1GN, 1 Side with
Backsplash

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



588612
(MBAAGBDDAO) Electric Multi Braiser, one-side operated with
backsplash, 1/1 GN

Short Form Specification

Item No. _____

Unit constructed according to DIN 18860_2 with 20 mm drop nose top and 70 mm recessed plinth. Internal frame for heavy duty sturdiness in stainless steel. 2 mm top in 1.4301 (AISI 304). Flat surface construction, easily cleanable. THERMODUL connection system enables seamless worktop when units are connected and avoids soil penetrating. Multi-purpose cooking appliance which can be used to shallow fry, cook liquids or as a bain marie. 18 mm-thick stainless steel plated bottom, seamlessly welded to the chrome nickel steel well. Powerblock heating system for optimal temperature distribution, which can be set up to 280°C. Interior pan dimensions allows the use of GN containers. Large drain hole allows to drain the cooking juices into a large collector. All-round basin raised edges to protect against soil infiltration. Overheat protection switches off the supply in case of overheating. Standby function saves energy and quickly recovers maximum power. Metal knobs with embedded hygienic silicon "soft" grip enable easier handling and cleaning.
IPX5 water resistant certification.

Configuration: Freestanding, one side operated with
backsplash.

APPROVAL: _____



Experience the Excellence
www.electroluxprofessional.com

Main Features

- Large drain hole on cooking surface permits the draining of residual cooking juices into a large collector placed under the cooking surface.
- Multi purpose cooking appliance that can be used to shallow fry, cook liquids or even as a bain marie. Unit can be used for sautéing, poaching, steaming, simmering, stewing, braising, boiling and preparing white sauces.
- Overheat protection: a temperature sensor switches off the supply in case of overheating.
- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Metal knobs with embedded hygienic "soft-touch" grip for easier handling and cleaning. The special design of the controls prevents infiltration of liquids or soil into vital components.
- Powerblock heating system for optimal temperature distribution.
- Handles are ergonomically designed with silicon "soft" grip for easy handling and cleaning.
- Raised edge all around the well to protect from infiltration of dirt from worktop.
- Temperature can be set up to a maximum of 280 °C.
- Interior dimensions of the well enables the use of GN containers.

Construction

- An 18 mm thick stainless steel plated bottom is seamlessly welded into the chrome nickel steel well.
- Rounded corners and edges aid cleaning.
- Storage space in the base of the appliance that can accept GN1/1 containers.
- 2 mm top in 1.4301 (AISI 304).
- IPX5 water resistance certification.
- Unit constructed according to DIN 18860.2 with 20 mm drop nose top and 70 mm recessed plinth.
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in stainless steel.

Sustainability

- Standby function for energy saving and fast recovery of maximum power.

Optional Accessories

- | | | |
|---|------------|--------------------------|
| • Lid for multi braisers, 1/1 GN | PNC 910625 | ☐ |
| • Connecting rail kit for appliances with backsplash, 850mm | PNC 912498 | ☐ |
| • Portioning shelf, 400mm width | PNC 912522 | ☐ |
| • Portioning shelf, 400mm width | PNC 912552 | ☐ |
| • Folding shelf, 300x850mm | PNC 912579 | ☐ |
| • Folding shelf, 400x850mm | PNC 912580 | ☐ |
| • Fixed side shelf, 200x850mm | PNC 912586 | ☐ |
| • Fixed side shelf, 300x850mm | PNC 912587 | ☐ |
| • Fixed side shelf, 400x850mm | PNC 912588 | ☐ |

- | | | |
|---|------------|--------------------------|
| • Stainless steel front kicking strip, 400mm width | PNC 912630 | ☐ |
| • Stainless steel side kicking strip left and right, wall mounted, 850mm width | PNC 912659 | ☐ |
| • Stainless steel side kicking strip left and right, back-to-back, 1700mm width | PNC 912662 | ☐ |
| • Stainless steel plinth, against wall, 400mm width | PNC 912878 | ☐ |
| • Stainless steel side panel, 850x700mm, right side, against wall | PNC 913003 | ☐ |
| • Stainless steel side panel, 850x700mm, left side, against wall | PNC 913004 | ☐ |
| • Back panel, 400x700mm, for units with backsplash | PNC 913009 | ☐ |
| • Endrail kit, flush-fitting, with backsplash, left | PNC 913115 | ☐ |
| • Endrail kit, flush-fitting, with backsplash, right | PNC 913116 | ☐ |
| • Scraper for smooth plates | PNC 913119 | ☐ |
| • Blades with rounded sides for scraper | PNC 913123 | ☐ |
| • Endrail kit (12.5mm) for thermaline 85 units with backsplash, left | PNC 913206 | ☐ |
| • Endrail kit (12.5mm) for thermaline 85 units with backsplash, right | PNC 913207 | ☐ |
| • U-clamping rail for back-to-back installations with backsplash (to be ordered as S-code) | PNC 913226 | ☐ |
| • Bottom plate for multibraiser 1/1 GN | PNC 913228 | ☐ |
| • Insert profile, d=850mm | PNC 913231 | ☐ |
| • Perforated shelf for warming cabinets and cupboard bases (one-side operated TL80-85-90 and two-side operated for TL80) | PNC 913233 | ☐ |
| • Energy optimizer kit 14A - factory fitted | PNC 913244 | ☐ |
| • Side reinforced panel only in combination with side shelf, for against the wall installations, right | PNC 913261 | ☐ |
| • Side reinforced panel only in combination with side shelf, for against the wall installations, left | PNC 913262 | ☐ |
| • Shelf fixation for TL80-85-90 one-side operated, TL80 two-side operated | PNC 913279 | ☐ |
| • Additional wall mounting fixation - US | PNC 913640 | ☐ |
| • Stainless steel lower side panel (12,5mm), 850x300mm, left side, wall mounted | PNC 913641 | ☐ |
| • Stainless steel lower side panel (12,5mm), 850x300mm, right side, wall mounted | PNC 913642 | ☐ |
| • Wall mounting kit for units - TL85/90 - Factory Fitted (H=700) | PNC 913655 | ☐ |
| • Stainless steel dividing panel, 850x700mm, (it should only be used between Electrolux Professional thermaline Modular 85 and thermaline C85) | PNC 913670 | ☐ |
| • Stainless steel side panel, 850x700mm, flush-fitting (it should only be used against the wall, against a niche and in between Electrolux Professional thermaline and ProThermetic appliances and external appliances - provided that these have at least the same dimensions) | PNC 913686 | ☐ |

Recommended Detergents


- C41 HI-TEMP RAPID DEGREASER, 1 PNC 0S2292 
pack of six 1 lt. bottles (trigger incl.)




Electrolux
PROFESSIONAL

Modular Cooking Range Line thermaline 85 - Electric Freestanding Multi Braiser, 1/1GN, 1 Side with Backsplash

Front




Side

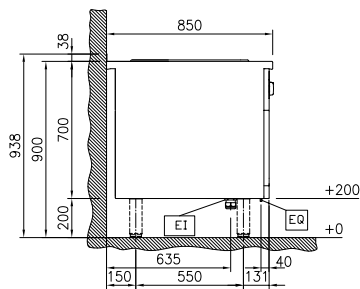

EI = Electrical inlet (power)
EQ = Equipotential screw

Top



Electric

Supply voltage: 400 V/3N ph/50/60 Hz
Total Watts: 5 kW

Key Information:

Usable well dimensions (width): 306 mm
Usable well dimensions (height): 110 mm
Usable well dimensions (depth): 508 mm
Well Capacity, Max: ISO 9001; ISO 14001 lt
Working Temperature MIN: 120 °C
Working Temperature MAX: 280 °C
External dimensions, Width: 400 mm
External dimensions, Depth: 850 mm
External dimensions, Height: 700 mm
Storage Cavity Dimensions (width): 340 mm
Storage Cavity Dimensions (height): 330 mm
Storage Cavity Dimensions (depth): 740 mm
Net weight: 72 kg
Configuration: Rectangular;Fixed;With splashback

Sustainability

Current consumption: 7.22 Amps



Modular Cooking Range Line
thermaline 85 - Electric Freestanding Multi Braiser, 1/1GN, 1 Side with
Backsplash
The company reserves the right to make modifications to the products
without prior notice. All information correct at time of printing.

2025.09.06

Optional Accessories

• Lid for multi braisers, 1/1 GN	PNC 910625	☐	• Stainless steel lower side panel (12,5mm), 850x300mm, right side, wall mounted	PNC 913642	☐
• Connecting rail kit for appliances with backsplash, 850mm	PNC 912498	☐	• Wall mounting kit for units - TL85/90 - Factory Fitted (H=700)	PNC 913655	☐
• Portioning shelf, 400mm width	PNC 912522	☐	• Stainless steel dividing panel, 850x700mm, (it should only be used between Electrolux Professional thermaline Modular 85 and thermaline C85)	PNC 913670	☐
• Portioning shelf, 400mm width	PNC 912552	☐	• Stainless steel side panel, 850x700mm, flush-fitting (it should only be used against the wall, against a niche and in between Electrolux Professional thermaline and ProThermetic appliances and external appliances - provided that these have at least the same dimensions)	PNC 913686	☐
• Folding shelf, 300x850mm	PNC 912579	☐			
• Folding shelf, 400x850mm	PNC 912580	☐			
• Fixed side shelf, 200x850mm	PNC 912586	☐			
• Fixed side shelf, 300x850mm	PNC 912587	☐			
• Fixed side shelf, 400x850mm	PNC 912588	☐			
• Stainless steel front kicking strip, 400mm width	PNC 912630	☐			
• Stainless steel side kicking strip left and right, wall mounted, 850mm width	PNC 912659	☐			
• Stainless steel side kicking strip left and right, back-to-back, 1700mm width	PNC 912662	☐			
• Stainless steel plinth, against wall, 400mm width	PNC 912878	☐			
• Stainless steel side panel, 850x700mm, right side, against wall	PNC 913003	☐			
• Stainless steel side panel, 850x700mm, left side, against wall	PNC 913004	☐			
• Back panel, 400x700mm, for units with backsplash	PNC 913009	☐			
• Endrail kit, flush-fitting, with backsplash, left	PNC 913115	☐			
• Endrail kit, flush-fitting, with backsplash, right	PNC 913116	☐			
• Scraper for smooth plates	PNC 913119	☐			
• Blades with rounded sides for scraper	PNC 913123	☐			
• Endrail kit (12.5mm) for thermaline 85 units with backsplash, left	PNC 913206	☐			
• Endrail kit (12.5mm) for thermaline 85 units with backsplash, right	PNC 913207	☐			
• U-clamping rail for back-to-back installations with backsplash (to be ordered as S-code)	PNC 913226	☐			
• Bottom plate for multibraiser 1/1 GN	PNC 913228	☐			
• Insert profile, d=850mm	PNC 913231	☐			
• Perforated shelf for warming cabinets and cupboard bases (one-side operated TL80-85-90 and two-side operated for TL80)	PNC 913233	☐			
• Energy optimizer kit 14A - factory fitted	PNC 913244	☐			
• Side reinforced panel only in combination with side shelf, for against the wall installations, right	PNC 913261	☐			
• Side reinforced panel only in combination with side shelf, for against the wall installations, left	PNC 913262	☐			
• Shelf fixation for TL80-85-90 one-side operated, TL80 two-side operated	PNC 913279	☐			
• Additional wall mounting fixation - US	PNC 913640	☐			
• Stainless steel lower side panel (12,5mm), 850x300mm, left side, wall mounted	PNC 913641	☐			

Recommended Detergents

• C41 HI-TEMP RAPID DEGREASER, 1 pack of six 1 lt. bottles (trigger incl.)	PNC 0S2292	☐
--	------------	--------------------------