Electrolux PROFESSIONAL

Modular Cooking Range Line thermaline 85 - 1000 mm Open base, 1 Šide

ITEM #		
MODEL #		
NAME #		
<u>SIS #</u>		
AIA #		

	 Main Fea All major confrom the from the	
5886538 (MBIMCAJOOO) Open Base, one-side operated Short Form Specification	Optional A • Stainless ste 1000mm wice • Stainless ste left and righ 1700mm wice • Stainless ste 850x700mm wall • Stainless ste 850x700mm	
Item No.	wall Perforated s	
1000 mm wide open base compartment to store pots, pans, sheet pans, etc. Internal frame for heavy duty sturdiness in stainless steel. Flat surface construction, easily cleanable. IPX5 water resistant certification. Configuration: One side operated freestanding base.	 Performance of the second se	
APPROVAL:		

tures

- omponents may be easily accessed ont.
- e compartment for storage of pots, t pans, etc.
- be placed below modular top to store pots, pans, sheet pans, etc.

tion

- n 1.4301 (AISI 304).
- resistance certification.
- e construction with minimal hidden asily clean all surfaces
- ame for heavy duty sturdiness in eel.
- SLATED]

crassorias


Optional Accessories	
 Stainless steel front kicking strip, 1000mm width 	PNC 912636 🛛
 Stainless steel side kicking strip left and right, wall mounted, 850mm width 	PNC 912659 🛛
 Stainless steel side kicking strip left and right, back-to-back, 1700mm width 	PNC 912662 🛛
 Stainless steel side panel, 850x700mm, right side, against wall 	PNC 913003 🛛
 Stainless steel side panel, 850x700mm, left side, against wall 	PNC 913004 🛛
• Perforated shelf for warming cabinets and cupboard bases (one-side operated TL80-85-90 and two-side operated for TL80)	PNC 913239 🛛
 Side reinforced panel only in combination with side shelf, for against the wall installations, right 	PNC 913261 🛛
 Side reinforced panel only in combination with side shelf, for against the wall installations, left 	PNC 913262 🛛
 Shelf fixation for TL80-85-90 one- side operated, TL80 two-side operated 	PNC 913279 🛛
 Stainless steel dividing panel, 850x700mm, (it should only be used between Electrolux Professional thermaline Modular 85 and thermaline C85) 	PNC 913670 🛛



 Stainless steel side panel, 850x700mm, PNC 913686
 flush-fitting (it should only be used against the wall, against a niche and in between Electrolux Professional thermaline and ProThermetic appliances and external appliances provided that these have at least the same dimensions)

Electrolux PROFESSIONAL

Modular Cooking Range Line thermaline 85 - 1000 mm Open base, 1 Side

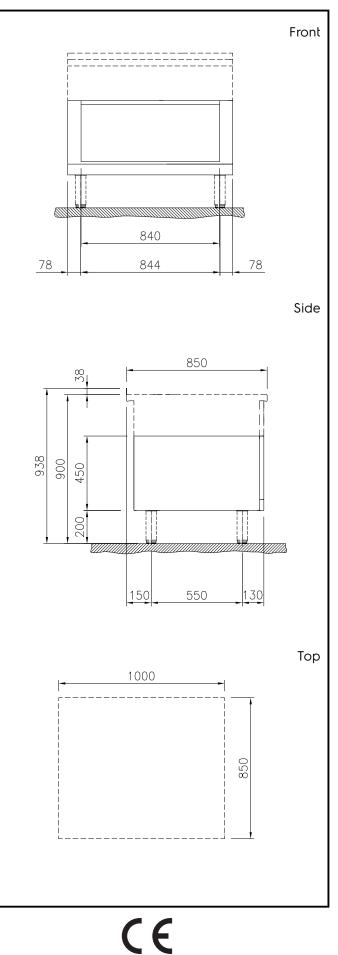

Key Information:

External dimensions, Width:	
588638 (MB1MCAJOOO)	1000 mm
External dimensions, Depth:	850 mm
External dimensions, Height:	450 mm
Cupboard Cavity Dimensions (width):	840 mm
Cupboard Cavity Dimensions (height):	330 mm
Cupboard Cavity Dimensions (depth): Net weight:	740 mm 23 kg
5	3

Modular Cooking Range Line thermaline 85 - 1000 mm Open base, 1 Side

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.