

Modular Cooking Range Line thermaline 85 - 500 mm Open base, GN conform, 1 Side

ITEM #		
MODEL #		
NAME #		
SIS #		
AIA#		



588641 (MBINCAEOOO)

Open Base, one-side operated, GN

Short Form Specification

Item No.

500 mm wide open base compartment to store pots, pans, sheet pans, etc. Internal frame for heavy duty sturdiness in stainless steel. Flat surface construction, easily cleanable. Open storage space in the base accepts GN 1/1 containers.

IPX5 water resistant certification.

Configuration: One side operated freestanding base.

Main Features

- All major components may be easily accessed from the front.
- Unit to be placed below modular top appliances to store pots, pans, sheet pans, etc.

Construction

- Storage space in the base of the appliance that can accept GN1/1 containers.
- IPX5 water resistance certification.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Rounded corners and edges aid cleaning.
- Internal frame for heavy duty sturdiness in stainless steel.

Optional Accessories

 Stainless steel front kicking strip, 	PNC 912631	
500mm width		
 Stainless steel side kicking strip left and right, wall mounted, 850mm width 	PNC 912659	
 Stainless steel side kicking strip left and right, back-to-back, 1700mm width 	PNC 912662	
Stainless steel side panel, 850x700mm, right side, against wall	PNC 913003	
Stainless steel side panel, 850x700mm, left side, against wall	PNC 913004	
 Perforated shelf for warming cabinets and cupboard bases (one-side operated TL80-85-90 and two-side operated for TL80) 	PNC 913233	
 Side reinforced panel only in combination with side shelf, for against the wall installations, right 	PNC 913261	
Side reinforced panel only in combination with side shelf, for against the wall installations, left	PNC 913262	
Shelf fixation for TL80-85-90 one- side operated, TL80 two-side operated	PNC 913279	
Stainless steel dividing panel, 850x700mm, (it should only be used between Flectrolux	PNC 913670	

Professional thermaline Modular

85 and thermaline C85)

APPROVAL:






Modular Cooking Range Line thermaline 85 - 500 mm Open base, GN conform, 1 Side

• Stainless steel side panel, 850x700mm, PNC 913686 flush-fitting (it should only be used against the wall, against a niche and in between Electrolux Professional thermaline and ProThermetic appliances and external appliances - provided that these have at least the same dimensions)



Modular Cooking Range Line thermaline 85 - 500 mm Open base, GN conform, 1 Side

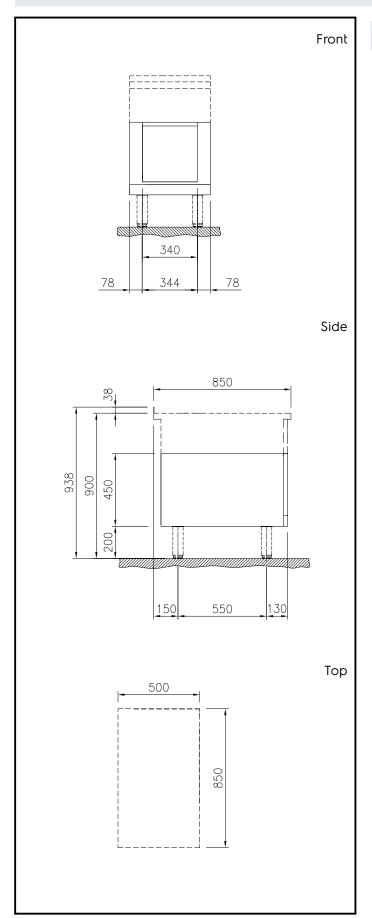

Key Information:

External dimensions, Width:

588641 (MBINCAEOOO) 500 mm External dimensions, Depth: 850 mm External dimensions, Height: 450 mm

Cupboard Cavity Dimensions

340 mm

Cupboard Cavity Dimensions

330 mm

Cupboard Cavity Dimensions

740 mm

(depth): Net weight: 18 kg