

Modular Cooking Range Line thermaline 85 - 500 mm Open base, GN conform, 1 Side

ITEM #	
MODEL #	
NAME #	
SIS #	
AIA#	



588641 (MBINCAEOOO)

Open Base, one-side operated, GN

Short Form Specification

Item No.

500 mm wide open base compartment to store pots, pans, sheet pans, etc. with hygienic design and round edges. Unit constructed according to DIN 18860_2 with 70 mm recessed plinth. Internal frame for heavy duty sturdiness in stainless steel. Flat surface construction, easily cleanable. Open storage space in the base accepts GN 1/1 containers. IPX5 water resistant certification.

Configuration: One side operated freestanding base.

Main Features

- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- IPX5 water resistance certification.
- Unit constructed according to DIN 18860_2 with 70 mm recessed plinth.

Construction

- Storage space in the base of the appliance that can accept GN1/1 containers.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Rounded corners and edges aid cleaning.
- Internal frame for heavy duty sturdiness in stainless steel.

Optional Accessories

~ r	, 1011a1 / 1000001100		
	tainless steel front kicking strip, 00mm width	PNC 912631	
le	tainless steel side kicking strip eft and right, wall mounted, 50mm width	PNC 912659	
le	tainless steel side kicking strip eft and right, back-to-back, 700mm width	PNC 912662	
8	tainless steel side panel, 50x700mm, right side, against ⁄all	PNC 913003	
8	tainless steel side panel, 50x700mm, left side, against vall	PNC 913004	
(0	erforated shelf for warming abinets and cupboard bases one-side operated TL80-85-90 and two-side operated for TL80)	PNC 913233	
• S c a	ide reinforced panel only in ombination with side shelf, for gainst the wall installations, aht	PNC 913261	
• S	ide reinforced panel only in ombination with side shelf, for gainst the wall installations, left	PNC 913262	
• S si	helf fixation for TL80-85-90 one- ide operated, TL80 two-side perated	PNC 913279	
8	tainless steel dividing panel, 50x700mm, (it should only be sed between Electrolux	PNC 913670	

Professional thermaline Modular

85 and thermaline C85)

APPROVAL:






Modular Cooking Range Line thermaline 85 - 500 mm Open base, GN conform, 1 Side

• Stainless steel side panel, 850x700mm, PNC 913686 flush-fitting (it should only be used against the wall, against a niche and in between Electrolux Professional thermaline and ProThermetic appliances and external appliances - provided that these have at least the same dimensions)



Modular Cooking Range Line thermaline 85 - 500 mm Open base, GN conform, 1 Side

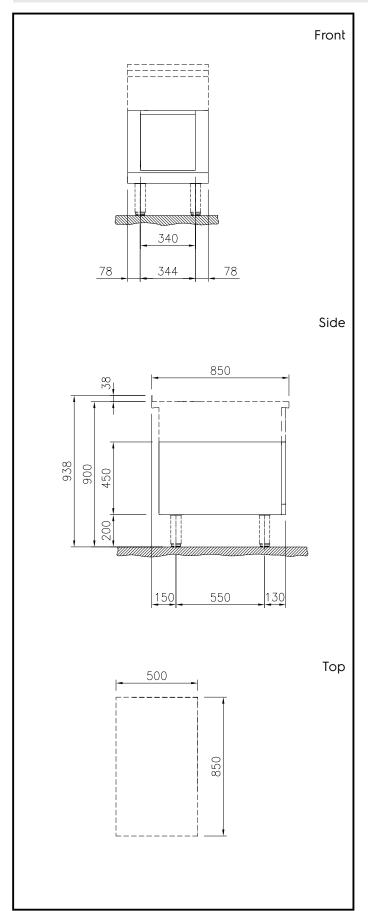

Key Information:

External dimensions, Width:

588641 (MBINCAEOOO) 500 mm **External dimensions, Depth:** 850 mm **External dimensions, Height:** 450 mm

Cupboard Cavity Dimensions

340 mm

Cupboard Cavity Dimensions

nt): 330 mm

Cupboard Cavity Dimensions (depth):

740 mm

Net weight: 18 kg