

Modular Cooking Range Line thermaline 85 - 700 mm Open base, GN conform, 1 Side (H2)

ITEM #		
MODEL #		
NAME #		
_		
SIS #		
AIA #		



588659 (MB1BCAGOOO)

Open Base, one-side operated, GN - H2

Short Form Specification

Item No.

700 mm wide open base compartment to store pots, pans, sheet pans, etc. with hygienic design and round edges. Internal frame for heavy duty sturdiness in stainless steel. Flat surface construction, easily cleanable. Open storage space in the base accepts GN 1/1 containers. IPX5 water resistant certification.

Configuration: One side operated freestanding base, hygienic class H2.

Main Features

- All major components may be easily accessed from the front.
- Unit to be placed below modular top appliances to store pots, pans, sheet pans, etc.

Construction

- Storage space in the base of the appliance that can accept GN1/1 containers.
- Hygienic design of the open base compartment with large round edges.
- IPX5 water resistance certification.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in stainless steel.

Optional Accessories

used between Electrolux Professional thermaline Modular

85 and thermaline C85)

•	phonai Accessories		
•	Stainless steel front kicking strip, 700mm width	PNC 912633	
•	Stainless steel side kicking strip left and right, wall mounted, 850mm width	PNC 912659	
•	Stainless steel side kicking strip left and right, back-to-back, 1700mm width	PNC 912662	
•	Stainless steel side panel, 850x700mm, right side, against wall	PNC 913003	
•	Stainless steel side panel, 850x700mm, left side, against wall	PNC 913004	
•	Perforated shelf for warming cabinets and cupboard bases (one-side operated TL80-85-90 and two-side operated for TL80)	PNC 913234	
•	Side reinforced panel only in combination with side shelf, for against the wall installations, right	PNC 913261	
•	Side reinforced panel only in combination with side shelf, for against the wall installations, left	PNC 913262	
•	Shelf fixation for TL80-85-90 one- side operated, TL80 two-side operated	PNC 913281	
•	Stainless steel dividing panel, 850x700mm, (it should only be	PNC 913670	

APPROVAL:






Modular Cooking Range Line thermaline 85 - 700 mm Open base, GN conform, 1 Side (H2)

• Stainless steel side panel, 850x700mm, PNC 913686 flush-fitting (it should only be used against the wall, against a niche and in between Electrolux Professional thermaline and ProThermetic appliances and external appliances - provided that these have at least the same dimensions)



Modular Cooking Range Line thermaline 85 - 700 mm Open base, GN conform, 1 Side (H2)

20 kg

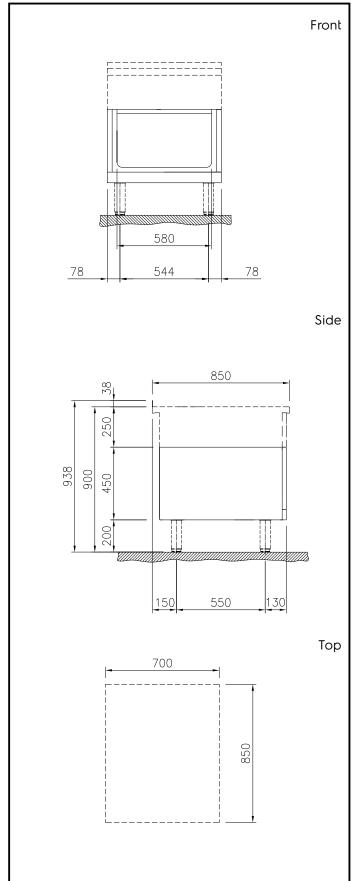

Key Information:

Net weight:

External dimensions, Width:

588659 (MB1BCAGOOO) 700 mm

External dimensions, Depth: 850 mm

External dimensions, Height: 450 mm

Cupboard Cavity Dimensions (height): 580 mm

Cupboard Cavity Dimensions (height): 330 mm

Cupboard Cavity Dimensions (depth): 740 mm

Modular Cooking Range Line thermaline 85 - 700 mm Open base, GN conform, 1 Side (H2)