


Modular Cooking Range Line thermaline 85 - Half Module Freestanding Gas Fry Top, 1 Side with Backsplash

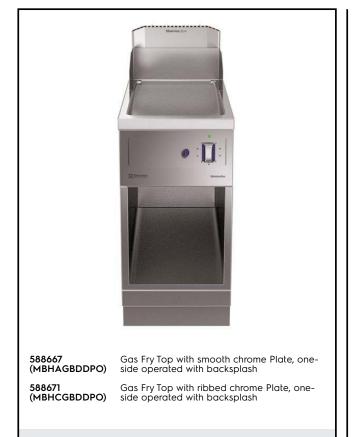

# **Short Form Specification**

#### Item No.

Unit constructed according to DIN 18860\_2 with 20 mm drop nose top and 70 mm recessed plinth. Internal frame for heavy duty sturdiness in stainless steel. 2 mm top in 1.4301 (AISI 304). Flat surface construction, easily cleanable. THERMODUL connection system enables seamless worktop when units are connected and avoids soil penetrating. Smooth chromiumplated mild steel cooking surface with non-stick finishing for optimal grilling. Stainless steel high splash guards on the rear and sides. Features safety thermostat, thermostatic control and led indication of pilot flame. Electrical ignition powered by battery with thermocouple for added safety. Large drain hole enables draining of cooking juices into a large collector. Overheat protection switches off the supply in case of overheating. Metal knobs with embedded hygienic silicon "soft" grip enable easier handling and cleaning.

IPX4 water resistant certification.

Configuration: Freestanding, one side operated with backsplash.

## Main Features

ITEM #

SIS #

AIA #

<u>MODEL #</u> NAME #

- Large drain hole on cooking surface permits the draining of residual cooking juices into a large collector placed under the cooking surface.
- Overheat protection: a temperature sensor switches off the supply in case of overheating.
- Safety thermostat and thermostatic control.
- Stainless steel high splash guards on the rear and sides of cooking surface.
- Units have separate controls for each half module of the cooking surface.
- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Metal knobs with embedded hygienic "softtouch" grip for easier handling and cleaning. The special design of the controls prevents infiltration of liquids or soil into vital components.
- Electrical ignition powered by battery with thermocouple for added safety.
- Led indication of pilot flame

### Construction

- 2 mm top in 1.4301 (AISI 304).
- Unit constructed according to DIN 18860\_2 with 20 mm drop nose top and 70 mm recessed plinth.
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Cooking surface in chromium-plated mild steel with non-stick finishing for optimum grilling results.
- IPx4 water protection.
- Internal frame for heavy duty sturdiness in stainless steel.
- Cooking surface to be completely smooth or completely ribbed.

#### APPROVAL:



#### Modular Cooking Range Line thermaline 85 - Half Module Freestanding Gas Fry Top, 1 Side with Backsplash

# **Optional Accessories**

#### • Connecting rail kit for appliances PNC 912498 with backsplash, 850mm

- Portioning shelf, 400mm width
- Portioning shelf, 400mm width
- Folding shelf, 300x850mm
- Folding shelf, 400x850mm
- Fixed side shelf, 200x850mm
- Fixed side shelf, 300x850mm PNC 912587
- Fixed side shelf, 400x850mm PNC 912588
- PNC 912630 Stainless steel front kicking strip, 400mm width
- Stainless steel side kicking strip left PNC 912659 and right, wall mounted, 850mm width

PNC 912522

PNC 912552

PNC 912579

PNC 912580

PNC 912586

- Stainless steel side kicking strip left PNC 912662 and right, back-to-back, 1700mm width
- PNC 912878 • Stainless steel plinth, against wall, 400mm width
- Stainless steel side panel, PNC 913003 850x700mm, right side, against wall
- Stainless steel side panel, PNC 913004 850x700mm, left side, against wall
- Back panel, 400x700mm, for units PNC 913009 with backsplash
- Endrail kit, flush-fitting, with PNC 913115 backsplash, left
- PNC 913116 • Endrail kit, flush-fitting, with backsplash, right
- Scraper for smooth plates (only for PNC 913119 588667)
- Scraper for ribbed plates (only for PNC 913120 588671)
- Endrail kit (12.5mm) for thermaline PNC 913206 85 units with backsplash, left
- Endrail kit (12.5mm) for thermaline PNC 913207 85 units with backsplash, right
- PNC 913226 • U-clamping rail for back-to-back installations with backsplash (to be ordered as S-code)
- PNC 913231 Insert profile, d=850mm
- Perforated shelf for warming PNC 913233 cabinets and cupboard bases (one-side operated TL80-85-90 and two-side operated for TL80)
- Side reinforced panel only in PNC 913261 combination with side shelf, for against the wall installations, right
- PNC 913262 Side reinforced panel only in combination with side shelf, for against the wall installations, left
- Shelf fixation for TL80-85-90 one-PNC 913279 side operated, TL80 two-side operated


# Recommended Detergents

• C41 HI-TEMP RAPID DEGREASER, PNC 0S2292 1 pack of six 1 lt. bottles (trigger incl.)

Gas	
Gas Power: Gas Type Option: Gas Inlet:	10 kW Natural Gas 1/2"
Key Information:	
Cooking Surface Depth: Cooking Surface Width: Working Temperature MIN: Working Temperature MAX: External dimensions, Width: External dimensions, Depth: External dimensions, Height: Storage Cavity Dimensions (width): Storage Cavity Dimensions (height): Storage Cavity Dimensions	615 mm 300 mm 110 °C 270 °C 400 mm 850 mm 700 mm 340 mm
(depth): Net weight:	740 mm 87 kg On Base;One-Side
Configuration: Cooking surface type: 588667 (MBHAGBDDPO) 588671 (MBHCGBDDPO)	Operated Smooth Ribbed
Cooking surface - material:	Chromium Plated mild steel mirror



## Modular Cooking Range Line thermaline 85 - Half Module Freestanding Gas Fry Top, 1 Side with Backsplash

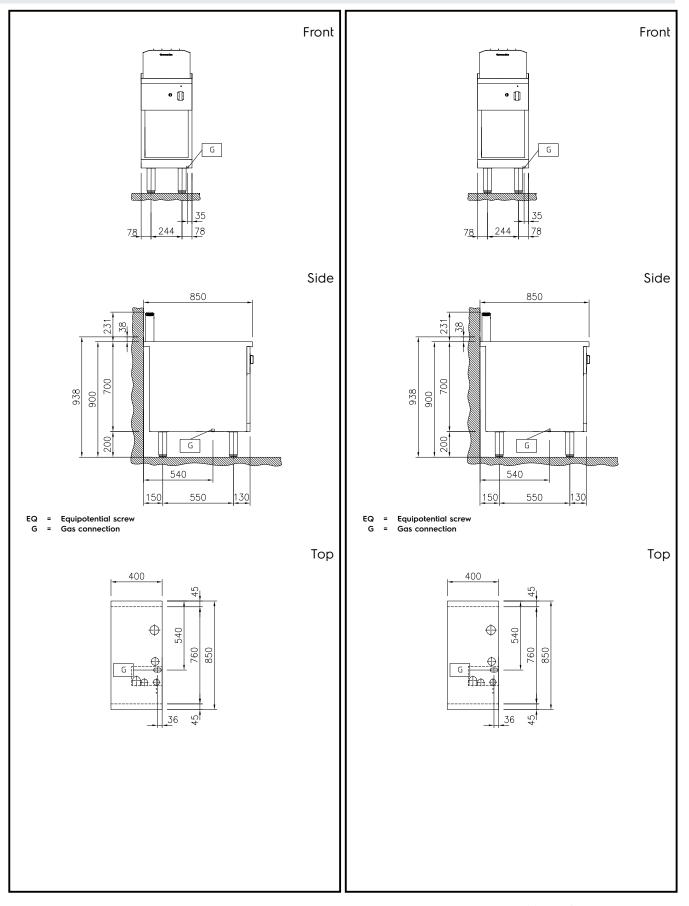

Modular Cooking Range Line thermaline 85 - Half Module Freestanding Gas Fry Top, 1 Side with Backsplash The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

