

Modular Cooking Range Line thermaline 85 - Half Module Freestanding Gas Fry Top, 1 Side with Backsplash (Town Gas)



Short Form Specification

Item No.

Unit constructed according to DIN 18860_2 with 20 mm drop nose top and 70 mm recessed plinth. Internal frame for heavy duty sturdiness in stainless steel. 2 mm top in 1.4301 (AISI 304). Flat surface construction, easily cleanable. THERMODUL connection system enables seamless worktop when units are connected and avoids soil penetrating. Smooth chromiumplated mild steel cooking surface with non-stick finishing for optimal grilling. Stainless steel high splash guards on the rear and sides. Features safety thermostat, thermostatic control and led indication of pilot flame. Electrical ignition powered by battery with thermocouple for added safety. Large drain hole enables draining of cooking juices into a large collector. Overheat protection switches off the supply in case of overheating. Metal knobs with embedded hygienic silicon "soft" grip enable easier handling and cleaning.

IPX4 water resistant certification.

Configuration: Freestanding, one side operated with backsplash.

AIA #		

Main Features

ITEM #

SIS #

<u>MODEL #</u> NAME #

- Large drain hole on cooking surface permits the draining of residual cooking juices into a large collector placed under the cooking surface.
- Overheat protection: a temperature sensor switches off the supply in case of overheating.
- Safety thermostat and thermostatic control.
- Stainless steel high splash guards on the rear and sides of cooking surface.
- Units have separate controls for each half module of the cooking surface.
- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Metal knobs with embedded hygienic "softtouch" grip for easier handling and cleaning. The special design of the controls prevents infiltration of liquids or soil into vital components.
- Electrical ignition powered by battery with thermocouple for added safety.
- Led indication of pilot flame

Construction

- 2 mm top in 1.4301 (AISI 304).
- Unit constructed according to DIN 18860_2 with 20 mm drop nose top and 70 mm recessed plinth.
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Cooking surface in chromium-plated mild steel with non-stick finishing for optimum grilling results.
- Cooking surface to be completely smooth or completely ribbed.
- IPx4 water protection.
- Internal frame for heavy duty sturdiness in stainless steel.

APPROVAL:




Modular Cooking Range Line thermaline 85 - Half Module Freestanding Gas Fry Top, 1 Side with Backsplash (Town Gas)

Optional Accessories				
 Connecting rail kit for appliances with backsplash, 850mm 	PNC 912498			
 Portioning shelf, 400mm width 	PNC 912522			
 Portioning shelf, 400mm width 	PNC 912552			
 Folding shelf, 300x850mm 	PNC 912579			
 Folding shelf, 400x850mm 	PNC 912580			
• Fixed side shelf, 200x850mm	PNC 912586			
• Fixed side shelf, 300x850mm	PNC 912587			
 Fixed side shelf, 400x850mm 	PNC 912588			
 Stainless steel front kicking strip, 400mm width 	PNC 912630			
 Stainless steel side kicking strip left and right, wall mounted, 850mm width 	PNC 912659			
 Stainless steel side kicking strip left and right, back-to-back, 1700mm width 	PNC 912662			
 Stainless steel plinth, against wall, 400mm width 	PNC 912878			
 Stainless steel side panel, 850x700mm, right side, against wall 	PNC 913003			
 Stainless steel side panel, 850x700mm, left side, against wall 	PNC 913004			
• Back panel, 400x700mm, for units with backsplash	PNC 913009			
 Endrail kit, flush-fitting, with backsplash, left 	PNC 913115			
 Endrail kit, flush-fitting, with backsplash, right 	PNC 913116			
Scraper for smooth plates (only for 593112)	PNC 913119			
 Scraper for ribbed plates (only for 593114) 	PNC 913120			
 Endrail kit (12.5mm) for thermaline 85 units with backsplash, left 	PNC 913206			
 Endrail kit (12.5mm) for thermaline 85 units with backsplash, right 	PNC 913207			
 U-clamping rail for back-to-back installations with backsplash (to be ordered as S-code) 	PNC 913226			
 Insert profile, d=850mm 	PNC 913231			
 Perforated shelf for warming cabinets and cupboard bases (one-side operated TL80-85-90 and two-side operated for TL80) 	PNC 913233			
 Side reinforced panel only in combination with side shelf, for 	PNC 913261			
 against the wall installations, right Side reinforced panel only in combination with side shelf, for against the wall installations, left 	PNC 913262			
 against the wall installations, left Shelf fixation for TL80-85-90 one-side operated, TL80 two-side operated 	PNC 913279			
Recommended Detergents				
 C41 HI-TEMP RAPID DEGREASER, 1 pack of six 1 lt. bottles (trigger incl.) 	PNC 0S2292			

_	Gas	
	Gas Power: Gas Type Option:	10 kW
	Gas Inlet:	1/2"
	Key Information:	
	Cooking Surface Depth:	615 mm
	Cooking Surface Width: Working Temperature MIN:	300 mm 110 °C
	Working Temperature MAX:	270 °C
	External dimensions, Width: External dimensions, Depth:	400 mm 850 mm
	External dimensions, Height:	700 mm
	Storage Cavity Dimensions (width):	340 mm
	Storage Cavity Dimensions (height):	330 mm
	Storage Cavity Dimensions (depth):	740 mm
_	Net weight:	87 kg
	Configuration:	On Base;One-Side Operated
	Cooking surface type:	
	593112 (MBHAGBDDVO) 593114 (MBHCGBDDVO)	Smooth Ribbed
_		Chromium Plated mild
	Cooking surface - material:	steel mirror



Modular Cooking Range Line thermaline 85 - Half Module Freestanding Gas Fry Top, 1 Side with Backsplash (Town Gas)

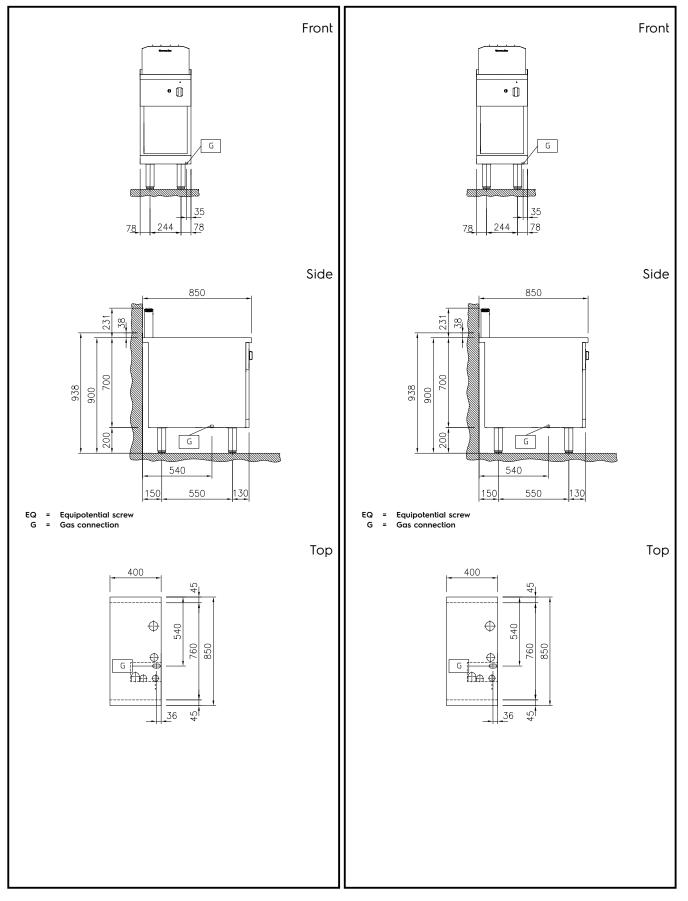

Modular Cooking Range Line thermaline 85 - Half Module Freestanding Gas Fry Top, 1 Side with Backsplash (Towm Gas) The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.