

## Modular Cooking Range Line thermaline 85 - 4-Burner Gas Top on Static Gas Oven with Ecoflam, 1 Side, Backsplash (Town Gas)

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



**593121**  
**(MBQMGBHCVO)** 4-Burner gas Top, on gas static Oven,  
ecoflam, one-side operated, town gas

### Short Form Specification

#### Item No. \_\_\_\_\_

Unit constructed according to DIN 18860\_2 with 20 mm drop nose top. Internal frame for heavy duty sturdiness in stainless steel. 2 mm top in 1.4301 (AISI 304). Flat surface construction, easily cleanable. THERMODUL connection system enables seamless worktop when units are connected and avoids soil penetrating. 4 gas burners with optimized combustion, flame failure device, thermocouple safety hand valve and protected pilot flame. Triple ring "flower" flame burners with anti-clogging design. Manual gas valves allow precise flame intensity control. Large pan support in cast iron with long center fins for various pan sizes. ECOFLAM pan detection system to save energy and to reduce unnecessary heat radiation in the kitchen. Deep flat spillage tray with rounded corners and drain hole. Metal knobs with embedded hygienic silicon "soft" grip enable easier handling and cleaning. Static gas oven chamber with 40 mm thick oven door and ribbed enamelled steel base plate. Oven chamber with 2 levels of runners for 2/1 GN shelves to enable simultaneous and faster cooking. Heavy duty thermostat with temperature range up to 300°C, electronic sensor for precise temperature control and manual humidity control in the cooking chamber. Upper heating element can also be used for grilling, with or without ventilating mode. IPX4 water resistant certification.

Configuration: Freestanding, one side operated.

### Main Features

- Flame failure device on each burner protects against gas leakage when accidental extinguishing of the flame occurs.
- Large sized pan support in cast iron with long center fins to allow the use of the largest down to the smallest pans.
- Manual gas valves allow precise control of the flame intensity between high and low positions.
- Manual oven shut-off valve.
- Pans can easily be moved from one area to another without lifting.
- 40 mm thick oven door for heat insulation.
- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Metal knobs with embedded hygienic "soft-touch" grip for easier handling and cleaning. The special design of the controls prevents infiltration of liquids or soil into vital components.
- Oven chamber to have 2 levels of runners to accommodate 2/1 GN trays and ribbed enamelled steel base plate.
- The upper heating element of the oven can also be used for grilling.
- Manual control of humidity in cooking chamber.
- Electronic sensor for precise temperature control.
- Burners with optimized combustion. Triple ring flower flame burners with anti-clogging design.
- Deep flat spillage tray with rounded corners and drain hole to facilitate cleaning.
- 100% safety pilot and thermocouple.
- Oven temperature up to 300 °C
- Patented Flower Flame burners that adjust to the size and form of the cookware (Patent EP2708813B1 and related family).

### Construction

- Each burner equipped with thermocouple safety hand valve and protected pilot flame.
- 2 mm top in 1.4301 (AISI 304).
- Unit constructed according to DIN 18860\_2 with 20 mm drop nose top and 70 mm recessed plinth.
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- IPx4 water protection.
- Internal frame for heavy duty sturdiness in stainless steel.

### Sustainability

- Model is supplied with Ecoflam pan detection system, which reduces energy consumption and unnecessary heat dispersion in the kitchen.

### Included Accessories


APPROVAL: \_\_\_\_\_




**Electrolux**  
PROFESSIONAL

**Modular Cooking Range Line**  
**thermaline 85 - 4-Burner Gas Top on Static**  
**Gas Oven with Ecoflam, 1 Side, Backsplash**  
**(Town Gas)**

Front

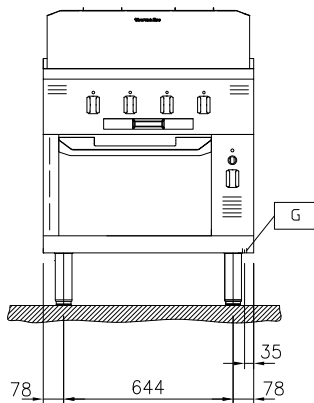


Side

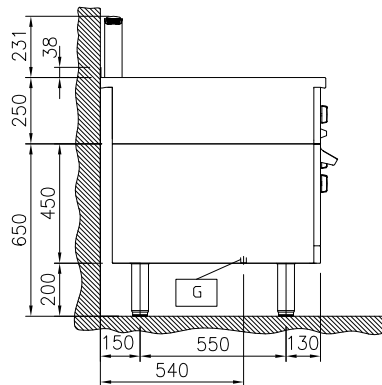

EQ = Equipotential screw  
G = Gas connection

Top



**Gas**

|                  |       |
|------------------|-------|
| Gas Power:       | 33 kW |
| Gas Type Option: |       |
| Gas Inlet:       | 1/2"  |

**Key Information:**

|                                  |                            |
|----------------------------------|----------------------------|
| Oven working Temperature:        | 80 °C MIN; 300 °C MAX      |
| Oven Cavity Dimensions (width):  | 683 mm                     |
| Oven Cavity Dimensions (height): | 255 mm                     |
| Oven Cavity Dimensions (depth):  | 671 mm                     |
| External dimensions, Width:      | 800 mm                     |
| External dimensions, Depth:      | 850 mm                     |
| External dimensions, Height:     | 700 mm                     |
| Net weight:                      | 163 kg                     |
| Configuration:                   | On Oven; One-Side Operated |
| Front Burners Power:             | 7 - 7 kW                   |
| Back Burners Power:              | 7 - 7 kW                   |
| Back Burners Dimension - mm      | Ø 70 Ø 70                  |
| Front Burners Dimension - mm     | Ø 70 Ø 70                  |
| Oven GN:                         | GN 2/1                     |



Modular Cooking Range Line  
thermaline 85 - 4-Burner Gas Top on Static Gas Oven with Ecoflam, 1  
Side, Backsplash (Town Gas)  
The company reserves the right to make modifications to the products  
without prior notice. All information correct at time of printing.

2025.12.12