

## **Modular Cooking Range Line** thermaline 90 - 200 mm Closed Work top, 1 Side with Backsplash

ITEM #		
MODEL #		
NAME #		
SIS #		
AIA #		



589153 (MCNABBBOOO)

Closed Work Top, one-side operated with backsplash

## **Short Form Specification**

### Item No.

Closed work top, 200 mm wide, constructed according to DIN 18860 2 with 20 mm drop nose top. Internal frame for heavy duty sturdiness in stainless steel. 2 mm top in 1.4301 (AISI 304). Flat surface construction, easily cleanable. THERMODUL connection system enables seamless worktop when units are connected and avoids soil penetrating.

IPX5 water resistant certification.

Configuration: One-side operated top with backsplash. The base needs to be supplied by the factory. Please include appropriate base.

## **Main Features**

- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.

## Construction

- IPX5 water resistance certification.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in 1.4301 (AISI 304).
- Unit constructed according to DIN 18860 2 with 20 mm drop nose top.

Optional Accessories		
<ul> <li>Connecting rail kit for appliances F with backsplash, 900mm</li> </ul>	PNC 912499	
•	PNC 912520	
	PNC 912550	
• Folding shelf, 300x900mm F	PNC 912581	
• Folding shelf, 400x900mm F	PNC 912582	
• Fixed side shelf, 200x900mm F	PNC 912589	
• Fixed side shelf, 300x900mm F	PNC 912590	
• Fixed side shelf, 400x900mm F	PNC 912591	
Connecting rail kit for appliances with backsplash: modular 90 (on the left) to ProThermetic tilting (on the right), ProThermetic stationary (on the left) to ProThermetic tilting (on the right)	PNC 912981	
Connecting rail kit for appliances F with backsplash: modular 90 (on the right) to ProThermetic tilting (on the left), ProThermetic stationary (on the right) to ProThermetic tilting (on the left)	PNC 912982	
<ul> <li>Back panel, 200x700mm, for units F with backsplash</li> </ul>	PNC 913007	
• Back panel, 200x800mm, for units F with backsplash	PNC 913020	
• Endrail kit, flush-fitting, with backsplash, left	PNC 913117	
<ul> <li>Endrail kit, flush-fitting, with backsplash, right</li> </ul>	PNC 913118	
• Endrail kit (12.5mm) for thermaline F 90 units with backsplash, left	PNC 913208	
	PNC 913209	
<ul> <li>U-clamping rail for back-to-back F installations with backsplash (to be ordered as S-code)</li> </ul>	PNC 913226	
• Insert profile d=900	PNC 913232	

### APPROVAL:






# Modular Cooking Range Line thermaline 90 - 200 mm Closed Work top, 1 Side with Backsplash

<ul> <li>Stainless steel side panel (12,5mm), 900x400mm, left side, wall mounted</li> </ul>	PNC 913636	
<ul> <li>Stainless steel side panel (12,5mm), 900x400mm, right side, wall mounted</li> </ul>	PNC 913637	
<ul> <li>Stainless steel side panel, 900x400mm, flush-fitting, left side, wall mounted</li> </ul>	PNC 913638	
<ul> <li>Stainless steel side panel, 900x400mm, flush-fitting, right side, wall mounted</li> </ul>	PNC 913639	
<ul> <li>Additional wall mounting fixation - US</li> </ul>	PNC 913640	
<ul> <li>Wall mounting kit top - TL85/90 - Factory Fitted</li> </ul>	PNC 913646	



## Modular Cooking Range Line thermaline 90 - 200 mm Closed Work top, 1 Side with Backsplash

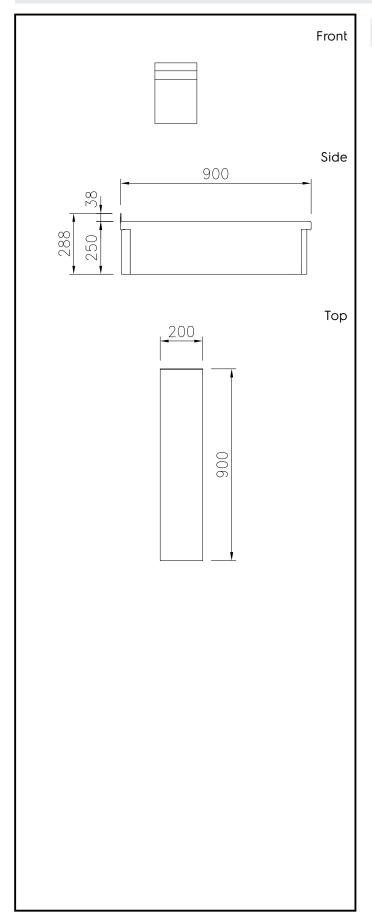

# Key Information:

External dimensions, Width:

589153 (MCNABBBOOO)200 mmExternal dimensions, Depth:900 mmExternal dimensions, Height:250 mmNet weight:16 kg

Modular Cooking Range Line thermaline 90 - 200 mm Closed Work top, 1 Side with Backsplash