



Electrolux
PROFESSIONAL

Modular Cooking Range Line thermaline 90 - 300 mm Closed Work top, 1 Side

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



589154 (MCNABACOOO)

Closed Work Top, one-side
operated

Short Form Specification

Item No. _____

Closed work top, 300 mm wide, constructed according to DIN 18860_2 with 20 mm drop nose top. Internal frame for heavy duty sturdiness in stainless steel. 2 mm top in 1.4301 (AISI 304). Flat surface construction, easily cleanable. THERMODUL connection system enables seamless worktop when units are connected and avoids soil penetrating.

IPX5 water resistant certification.

Configuration: One-side operated top. The base needs to be supplied by the factory. Please include appropriate base.

Main Features

- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.

Construction

- IPX5 water resistance certification.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in 1.4301 (AISI 304).
- Unit constructed according to DIN 18860_2 with 20 mm drop nose top.

Optional Accessories

- | | | |
|--|------------|--------------------------|
| • Connecting rail kit, 900mm | PNC 912502 | ☐ |
| • Portioning shelf, 300mm width | PNC 912521 | ☐ |
| • Portioning shelf, 300mm width | PNC 912551 | ☐ |
| • Folding shelf, 300x900mm | PNC 912581 | ☐ |
| • Folding shelf, 400x900mm | PNC 912582 | ☐ |
| • Fixed side shelf, 200x900mm | PNC 912589 | ☐ |
| • Fixed side shelf, 300x900mm | PNC 912590 | ☐ |
| • Fixed side shelf, 400x900mm | PNC 912591 | ☐ |
| • Connecting rail kit: modular 90 (on the left) to ProThermetic tilting (on the right), ProThermetic stationary (on the left) to ProThermetic tilting (on the right) | PNC 912975 | ☐ |
| • Connecting rail kit: modular 80 (on the right) to ProThermetic tilting (on the left), ProThermetic stationary (on the right) to ProThermetic tilting (on the left) | PNC 912976 | ☐ |
| • Endrail kit, flush-fitting, left | PNC 913111 | ☐ |
| • Endrail kit, flush-fitting, right | PNC 913112 | ☐ |
| • Endrail kit (12.5mm) for thermaline 90 units, left | PNC 913202 | ☐ |
| • Endrail kit (12.5mm) for thermaline 90 units, right | PNC 913203 | ☐ |
| • T-connection rail for back-to-back installations without backsplash (to be ordered as S-code) | PNC 913227 | ☐ |
| • Insert profile d=900 | PNC 913232 | ☐ |
| • Endrail kit, (12.5mm), for back-to-back installation, left | PNC 913251 | ☐ |
| • Endrail kit, (12.5mm), for back-to-back installation, right | PNC 913252 | ☐ |
| • Endrail kit, flush-fitting, for back-to-back installation, left | PNC 913255 | ☐ |
| • Endrail kit, flush-fitting, for back-to-back installation, right | PNC 913256 | ☐ |

APPROVAL: _____



Experience the Excellence
www.electroluxprofessional.com




Electrolux
PROFESSIONAL

**Modular Cooking Range Line
thermaline 90 - 300 mm Closed
Work top, 1 Side**


Key Information:

External dimensions, Width:	
589154 (MCNABACOOO)	300 mm
External dimensions, Depth:	900 mm
External dimensions, Height:	250 mm
Net weight:	19 kg


Front



Side

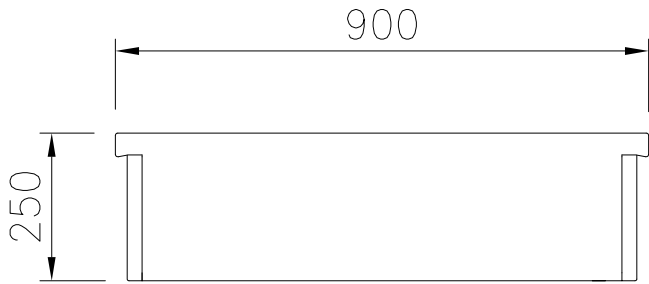

Top

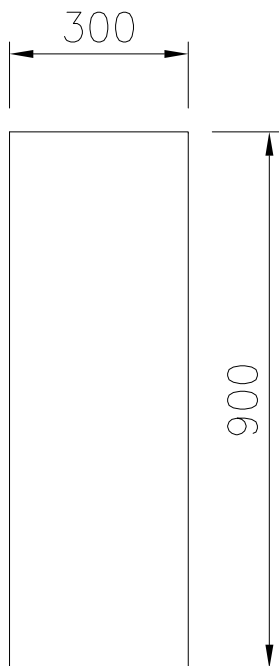

**Modular Cooking Range Line
thermaline 90 - 300 mm Closed Work top, 1 Side**

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2026.03.02