Electrolux

Modular Cooking Range Line thermaline 90 - 400 mm Closed Work top, 1 Side with Backsplash



Short Form Specification

Item No.

Closed work top, 400 mm wide, constructed according to DIN 18860 2 with 20 mm drop nose top. Internal frame for heavy duty sturdiness in stainless steel. 2 mm top in 1.4301 (AISI 304). Flat surface construction, easily cleanable. THERMODUL connection system enables seamless worktop when units are connected and avoids soil penetrating.

IPX5 water resistant certification.

Configuration: One-side operated top with backsplash. The base needs to be supplied by the factory. Please include appropriate base.

ITEM # MODEL # NAME # SIS # AIA

Main Features

- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.

Construction

- IPX5 water resistance certification.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in 1.4301 (AISI 304).
- Unit constructed according to DIN 18860 2 with 20 mm drop nose top.

Optional Accessories

- Connecting rail kit for appliances PNC 912499 with backsplash, 900mm
- PNC 912522 • Portioning shelf, 400mm width
- PNC 912552 • Portioning shelf, 400mm width
- Folding shelf, 300x900mm PNC 912581
- Folding shelf, 400x900mm PNC 912582
- Fixed side shelf, 200x900mm PNC 912589
- Fixed side shelf, 300x900mm PNC 912590
- Fixed side shelf, 400x900mm PNC 912591
- Connecting rail kit for appliances PNC 912981 with backsplash: modular 90 (on the left) to ProThermetic tilting (on the right), ProThermetic stationary (on the left) to ProThermetic tilting (on the right)
- Connecting rail kit for appliances PNC 912982 with backsplash: modular 90 (on the right) to ProThermetic tilting (on the left), ProThermetic stationary (on the right) to ProThermetic tilting (on the left)
- Back panel, 400x700mm, for units PNC 913009 with backsplash
- Back panel, 400x800mm, for units PNC 913022 with backsplash
- Endrail kit, flush-fitting, with PNC 913117 backsplash, left
- Endrail kit, flush-fitting, with PNC 913118 backsplash, right
- Endrail kit (12.5mm) for thermaline PNC 913208 90 units with backsplash, left
- Endrail kit (12.5mm) for thermaline PNC 913209 90 units with backsplash, right
- U-clamping rail for back-to-back PNC 913226 installations with backsplash (to be ordered as S-code)
- Insert profile d=900 PNC 913232

APPROVAL:






- Stainless steel side panel (12,5mm), 900x400mm, left side, wall mounted
- Stainless steel side panel (12,5mm), PNC 913637 900x400mm, right side, wall mounted
 Stainless steel side panel, 900x400mm, PNC 913638

- Stainless steel side panel, 900x400mm, PNC 913639
 Stainless steel side panel, 900x400mm, PNC 913639
- flush-fitting, right side, wall mounted • Additional wall mounting fixation - US PNC 913640
- Additional wall mounting fixation US PNC 913640
 Wall mounting kit top TL85/90 PNC 913648
- Wall mounting kit top TL85/90 PNC 913648 Factory Fitted



Modular Cooking Range Line thermaline 90 - 400 mm Closed Work top, 1 Side with Backsplash

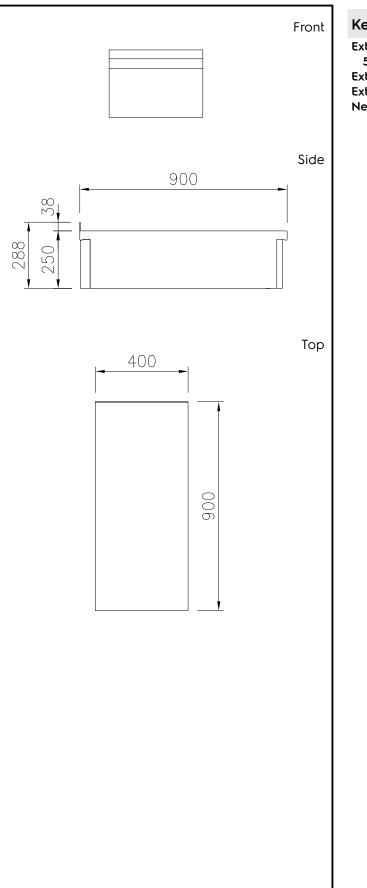

Key Information:

External dimensions, Width:	
589157 (MCNABBDOOO)	400 mm
External dimensions, Depth:	900 mm
External dimensions, Height:	250 mm
Net weight:	21 kg

Modular Cooking Range Line thermaline 90 - 400 mm Closed Work top, 1 Side with Backsplash

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.