Electrolux PROFESSIONAL

ITEM #	
MODEL #	
NAME #	
SIS #	
AIA #	

Modular Cooking Range Line thermaline 90 - 500 mm Closed Work top, 1 Side with Backsplash

589159 (MCNABBEOOO)   Closed Work Top, one-side operated with backsplash

Short Form Specification

Item No.

Closed work top, 500 mm wide, constructed according to DIN 18860_2 with 20 mm drop nose top. Internal frame for heavy duty sturdiness in stainless steel. 2 mm top in 1.4301 (AISI 304). Flat surface construction, easily cleanable. THERMODUL connection system enables seamless worktop when units are connected and avoids soil penetrating.

IPX5 water resistant certification.

Configuration: One-side operated top with backsplash. The base needs to be supplied by the factory. Please include appropriate base.

APPROVAL:

Main Features

- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.

Construction

- IPX5 water resistance certification.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in 1.4301 (AISI 304).
- Unit constructed according to DIN 18860_2 with 20 mm drop nose top.

Optional Accessories

- Connecting rail kit for appliances with backsplash, 900mm   PNC 912499 ❑
- Portioning shelf, 500mm width   PNC 912523 ❑
- Portioning shelf, 500mm width   PNC 912553 ❑
- Folding shelf, 300x900mm   PNC 912581 ❑
- Folding shelf, 400x900mm   PNC 912582 ❑
- Fixed side shelf, 200x900mm   PNC 912589 ❑
- Fixed side shelf, 300x900mm   PNC 912590 ❑
- Fixed side shelf, 400x900mm   PNC 912591 ❑
- Connecting rail kit for appliances with backsplash: modular 90 (on the left) to ProThermetic tilting (on the right), ProThermetic stationary (on the left) to ProThermetic tilting (on the right)   PNC 912981 ❑
- Connecting rail kit for appliances with backsplash: modular 90 (on the right) to ProThermetic tilting (on the left), ProThermetic stationary (on the right) to ProThermetic tilting (on the left)   PNC 912982 ❑
- Back panel, 500x700mm, for units with backsplash   PNC 913010 ❑
- Back panel, 500x800mm, for units with backsplash   PNC 913023 ❑
- Endrail kit, flush-fitting, with backsplash, left   PNC 913117 ❑
- Endrail kit, flush-fitting, with backsplash, right   PNC 913118 ❑
- Endrail kit (12.5mm) for thermaline 90 units with backsplash, left   PNC 913208 ❑
- Endrail kit (12.5mm) for thermaline 90 units with backsplash, right   PNC 913209 ❑
- U-clamping rail for back-to-back installations with backsplash (to be ordered as S-code)   PNC 913226 ❑
- Insert profile d=900   PNC 913232 ❑

- Stainless steel side panel (12,5mm), 900x400mm, left side, wall mounted — PNC 913636 ❏
- Stainless steel side panel (12,5mm), 900x400mm, right side, wall mounted — PNC 913637 ❏
- Stainless steel side panel, 900x400mm, flush-fitting, left side, wall mounted — PNC 913638 ❏
- Stainless steel side panel, 900x400mm, flush-fitting, right side, wall mounted — PNC 913639 ❏
- Additional wall mounting fixation - US — PNC 913640 ❏
- Wall mounting kit top - TL85/90 - Factory Fitted — PNC 913649 ❏

Modular Cooking Range Line
thermaline 90 - 500 mm Closed Work top, 1 Side with Backsplash

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.
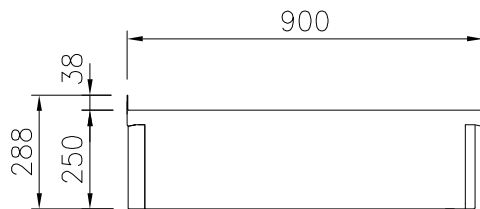
2025.07.04

Electrolux PROFESSIONAL

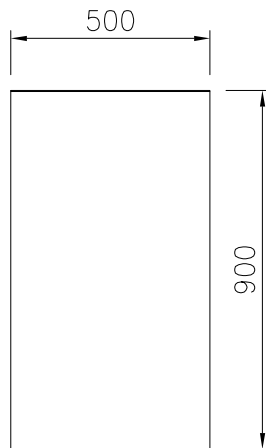Front

Side

900

38

288

250

Top

500

900

Key Information:

External dimensions, Width:
 589159 (MCNABBEOOO)   500 mm
External dimensions, Depth: 900 mm
External dimensions, Height: 250 mm
Net weight: 23 kg

CE

The company reserves the right to make modifications to the products
without prior notice. All information correct at time of printing.

2025.07.04