

Modular Cooking Range Line thermaline 90 - 700 mm Closed Work top, 1 Side with Backsplash

ITEM #	
MODEL #	
NAME #	
SIS #	
AIA #	



589163 (MCNABBGOOO)

Closed Work Top, one-side operated with backsplash

Short Form Specification

Item No.

Closed work top, 700 mm wide, constructed according to DIN 18860 2 with 20 mm drop nose top. Internal frame for heavy duty sturdiness in stainless steel. 2 mm top in 1.4301 (AISI 304). Flat surface construction, easily cleanable. THERMODUL connection system enables seamless worktop when units are connected and avoids soil penetrating.

IPX5 water resistant certification.

Configuration: One-side operated top with backsplash. The base needs to be supplied by the factory. Please include appropriate base.

Main Features

- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.

Construction

- IPX5 water resistance certification.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in 1.4301 (AISI 304).
- Unit constructed according to DIN 18860_2 with 20 mm drop nose top.

Optional Accessories	
 Connecting rail kit for appliances PNC 912- with backsplash, 900mm 	499 🗆
• Portioning shelf, 700mm width PNC 9125	525 🗆
• Portioning shelf, 700mm width PNC 9125	555 🗅
• Folding shelf, 300x900mm PNC 9125	581 🗖
• Folding shelf, 400x900mm PNC 9125	582 🗆
• Fixed side shelf, 200x900mm PNC 9125	589 🗆
• Fixed side shelf, 300x900mm PNC 9125	590 🗖
• Fixed side shelf, 400x900mm PNC 9125	591 🗖
Connecting rail kit for appliances With backsplash: modular 90 (on the left) to ProThermetic tilting (on the right), ProThermetic stationary (on the left) to ProThermetic tilting (on the right)	981 🗖
Connecting rail kit for appliances with backsplash: modular 90 (on the right) to ProThermetic tilting (on the left), ProThermetic stationary (on the right) to ProThermetic tilting (on the left)	982 🗆
 Back panel, 700x700mm, for units PNC 9131 with backsplash 	012 🗖
 Back panel, 700x800mm, for units PNC 9131 with backsplash 	025 🗖
 Endrail kit, flush-fitting, with backsplash, left 	117 🗆
 Endrail kit, flush-fitting, with backsplash, right PNC 913	118 🗖
 Endrail kit (12.5mm) for thermaline PNC 913: 90 units with backsplash, left 	208 🗖
 Endrail kit (12.5mm) for thermaline PNC 913: 90 units with backsplash, right 	209 🗆
 U-clamping rail for back-to-back PNC 913: installations with backsplash (to be ordered as S-code) 	226 🗖
• Insert profile d=900 PNC 913	232 🗖

APPROVAL:






Modular Cooking Range Line thermaline 90 - 700 mm Closed Work top, 1 Side with Backsplash

 Stainless steel side panel (12,5mm), 900x400mm, left side, wall mounted 	PNC 913636	
 Stainless steel side panel (12,5mm), 900x400mm, right side, wall mounted 	PNC 913637	
 Stainless steel side panel, 900x400mm, flush-fitting, left side, wall mounted 	PNC 913638	
 Stainless steel side panel, 900x400mm, flush-fitting, right side, wall mounted 	PNC 913639	
 Additional wall mounting fixation - US 	PNC 913640	
 Wall mounting kit top - TL85/90 - Factory Fitted 	PNC 913651	



Modular Cooking Range Line thermaline 90 - 700 mm Closed Work top, 1 Side with Backsplash

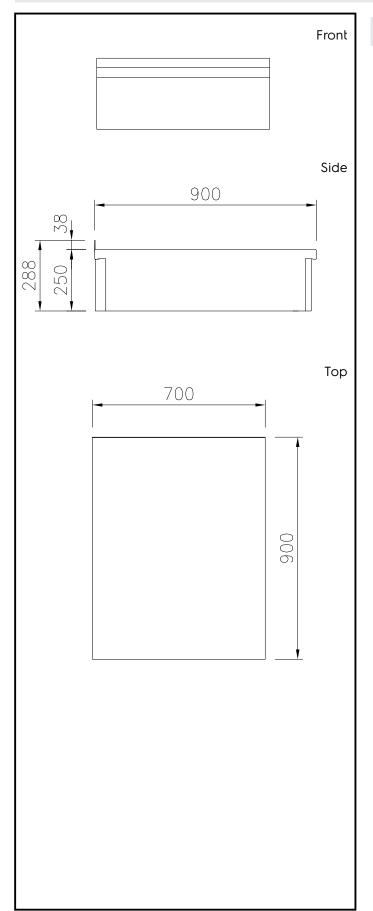

Key Information:

External dimensions, Width:

589163 (MCNABBGOOO)700 mmExternal dimensions, Depth:900 mmExternal dimensions, Height:250 mmNet weight:27 kg

Modular Cooking Range Line thermaline 90 - 700 mm Closed Work top, 1 Side with Backsplash