

Modular Cooking Range Line thermaline 90 - 900 mm Closed Work top, 1 Side with Backsplash

ITEM #	
MODEL #	
NAME #	
SIS #	
AIA #	



589167 (MCNABBIOOO)

Closed Work Top, one-side operated with backsplash

Short Form Specification

Item No.

Closed work top, 900 mm wide, constructed according to DIN 18860 2 with 20 mm drop nose top. Internal frame for heavy duty sturdiness in stainless steel. 2 mm top in 1.4301 (AISI 304). Flat surface construction, easily cleanable. THERMODUL connection system enables seamless worktop when units are connected and avoids soil penetrating.

IPX5 water resistant certification.

Configuration: One-side operated top with backsplash. The base needs to be supplied by the factory. Please include appropriate base.

Main Features

- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.

Construction

- IPX5 water resistance certification.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in 1.4301 (AISI 304).
- Unit constructed according to DIN 18860 2 with 20 mm drop nose top.

• Insert profile d=900

Optional Accessories	PNC 912499	П
• Connecting rail kit for appliances with backsplash, 900mm	PINC 912499	_
• Portioning shelf, 900mm width	PNC 912527	
 Portioning shelf, 900mm width 	PNC 912557	
 Folding shelf, 300x900mm 	PNC 912581	
 Folding shelf, 400x900mm 	PNC 912582	
 Fixed side shelf, 200x900mm 	PNC 912589	
 Fixed side shelf, 300x900mm 	PNC 912590	
 Fixed side shelf, 400x900mm 	PNC 912591	
 Connecting rail kit for appliances with backsplash: modular 90 (on 	PNC 912981	
the left) to ProThermetic tilting (on		
the right), ProThermetic stationary		
(on the left) to ProThermetic tilting (on the right)		
• Connecting rail kit for appliances	PNC 912982	
with backsplash: modular 90 (on		
the right) to ProThermetic tilting (on the left), ProThermetic		
stationary (on the right) to		
ProThermetic tilting (on the left)		
 Back panel, 900x700mm, for units with backsplash 	PNC 913014	
Back panel, 900x800mm, for units with backenlash	PNC 913027	
with backsplashEndrail kit, flush-fitting, with	PNC 913117	\Box
backsplash, left	PNC 913117	_
Endrail kit, flush-fitting, with backsplash right	PNC 913118	
backsplash, right	PNC 913208	
• Endrail kit (12.5mm) for thermaline 90 units with backsplash, left	PINC 913200	_
• Endrail kit (12.5mm) for thermaline 90 units with backsplash, right	PNC 913209	
 U-clamping rail for back-to-back 	PNC 913226	\Box
installations with backsplash	1110 710220	_

PNC 913232 🚨

APPROVAL:






Modular Cooking Range Line thermaline 90 - 900 mm Closed Work top, 1 Side with Backsplash

 Stainless steel side panel (12,5mm), 900x400mm, left side, wall mounted 	PNC 913636	
 Stainless steel side panel (12,5mm), 900x400mm, right side, wall mounted 	PNC 913637	
 Stainless steel side panel, 900x400mm, flush-fitting, left side, wall mounted 	PNC 913638	
 Stainless steel side panel, 900x400mm, flush-fitting, right side, wall mounted 	PNC 913639	
 Additional wall mounting fixation - US 	PNC 913640	
 Wall mounting kit top - TL85/90 - Factory Fitted 	PNC 913653	



Modular Cooking Range Line thermaline 90 - 900 mm Closed Work top, 1 Side with Backsplash

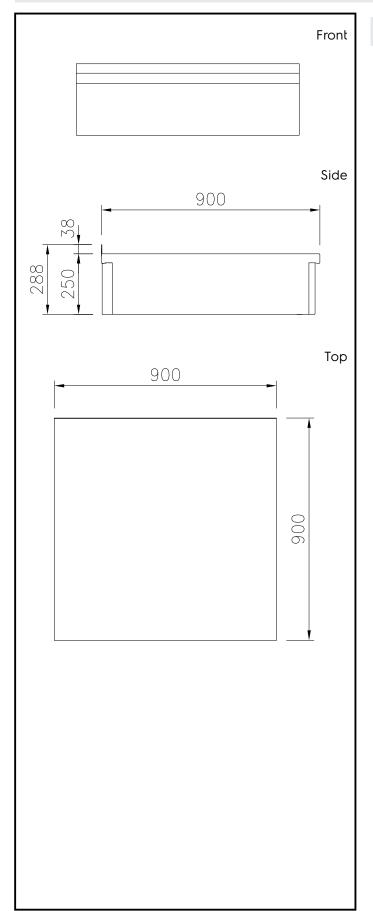

Key Information:

External dimensions, Width:

589167 (MCNABBIOOO)900 mmExternal dimensions, Depth:900 mmExternal dimensions, Height:250 mmNet weight:32 kg

Modular Cooking Range Line thermaline 90 - 900 mm Closed Work top, 1 Side with Backsplash