

Modular Cooking Range Line thermaline 90 - 900 mm Closed Work top, 1 Side with Backsplash

ITEM #		
MODEL #		
NAME #		
SIS #		
AIA #		



589167 (MCNABBIOOO)

Closed Work Top, one-side operated with backsplash

Short Form Specification

Item No.

Closed work top, 900 mm wide, constructed according to DIN 18860 2 with 20 mm drop nose top. Internal frame for heavy duty sturdiness in stainless steel. 2 mm top in 1.4301 (AISI 304). Flat surface construction, easily cleanable. THERMODUL connection system enables seamless worktop when units are connected and avoids soil penetrating.

IPX5 water resistant certification.

Configuration: One-side operated top with backsplash. The base needs to be supplied by the factory. Please include appropriate base.

Main Features

- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.

Construction

- IPX5 water resistance certification.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in 1.4301 (AISI 304).
- Unit constructed according to DIN 18860 2 with 20 mm drop nose top.

Insert profile d=900

Optional Accessories		
Connecting rail kit for appliances with backsplash, 900mm	PNC 91249	9 🗆
Portioning shelf, 900mm width	PNC 91252	7 🗖
 Portioning shelf, 900mm width 	PNC 91255	7 🗖
 Folding shelf, 300x900mm 	PNC 91258	1 🗆
 Folding shelf, 400x900mm 	PNC 91258	2 🗖
 Fixed side shelf, 200x900mm 	PNC 91258	9 🗖
 Fixed side shelf, 300x900mm 	PNC 91259	0 🗆
 Fixed side shelf, 400x900mm 	PNC 91259	1 🗆
 Connecting rail kit for appliances with backsplash: modular 90 (on the left) to ProThermetic tilting (on the right), ProThermetic stationary (on the left) to ProThermetic tilting (on the right) 	PNC 91298	1 🗅
Connecting rail kit for appliances with backsplash: modular 90 (on the right) to ProThermetic tilting (on the left), ProThermetic stationary (on the right) to ProThermetic tilting (on the left)	PNC 91298	2 🗖
• Back panel, 900x700mm, for units with backsplash	PNC 91301	4 🗖
• Back panel, 900x800mm, for units with backsplash	PNC 91302	7 🗆
 Endrail kit, flush-fitting, with backsplash, left 	PNC 913117	′ 🗅
 Endrail kit, flush-fitting, with backsplash, right 	PNC 913118	3 🗆
• Endrail kit (12.5mm) for thermaline 90 units with backsplash, left	PNC 91320	8 🗖
• Endrail kit (12.5mm) for thermaline 90 units with backsplash, right	PNC 91320	9 🗖
 U-clamping rail for back-to-back installations with backsplash (to be ordered as S-code) 	PNC 91322	6 🗖

PNC 913232 🚨

APPROVAL:






Modular Cooking Range Line thermaline 90 - 900 mm Closed Work top, 1 Side with Backsplash

•	Stainless steel side panel (12,5mm), 900x400mm, left side, wall mounted	PNC 913636	Ш
•	Stainless steel side panel (12,5mm), 900x400mm, right side, wall mounted	PNC 913637	
•	Stainless steel side panel, 900x400mm, flush-fitting, left side, wall mounted	PNC 913638	
•	Stainless steel side panel, 900x400mm, flush-fitting, right side, wall mounted	PNC 913639	
•	Additional wall mounting fixation - US	PNC 913640	
•	Wall mounting kit top - TL85/90 - Factory Fitted	PNC 913653	



Modular Cooking Range Line thermaline 90 - 900 mm Closed Work top, 1 Side with Backsplash

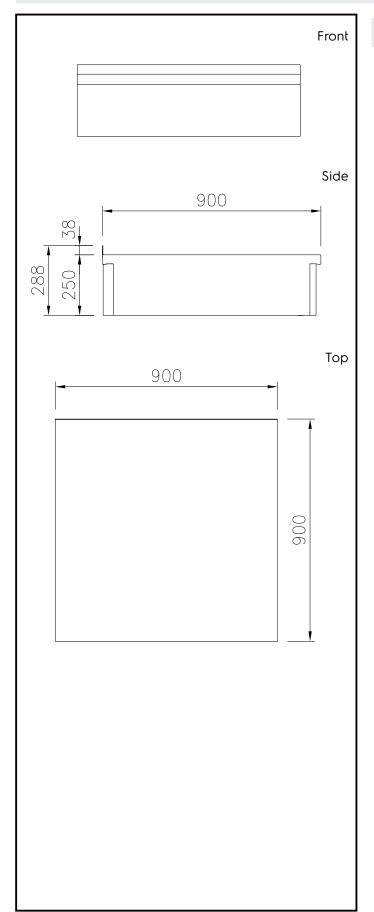

Key Information:

External dimensions, Width:

589167 (MCNABBIOOO)900 mmExternal dimensions, Depth:900 mmExternal dimensions, Height:250 mmNet weight:32 kg

Modular Cooking Range Line thermaline 90 - 900 mm Closed Work top, 1 Side with Backsplash