



Electrolux
PROFESSIONAL

Modular Cooking Range Line thermaline 90 - 900 mm Closed Work top, 1 Side with Backsplash

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



589167 (MCNABBIOOO)

Closed Work Top, one-side
operated with backsplash

Short Form Specification

Item No. _____

Closed work top, 900 mm wide, constructed according to DIN 18860_2 with 20 mm drop nose top. Internal frame for heavy duty sturdiness in stainless steel. 2 mm top in 1.4301 (AISI 304). Flat surface construction, easily cleanable. THERMODUL connection system enables seamless worktop when units are connected and avoids soil penetrating.

IPX5 water resistant certification.

Configuration: One-side operated top with backsplash. The base needs to be supplied by the factory. Please include appropriate base.

Main Features

- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.

Construction

- IPX5 water resistance certification.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in 1.4301 (AISI 304).
- Unit constructed according to DIN 18860_2 with 20 mm drop nose top.

Optional Accessories

- Connecting rail kit for appliances with backsplash, 900mm PNC 912499 ☐
- Portioning shelf, 900mm width PNC 912527 ☐
- Portioning shelf, 900mm width PNC 912557 ☐
- Folding shelf, 300x900mm PNC 912581 ☐
- Folding shelf, 400x900mm PNC 912582 ☐
- Fixed side shelf, 200x900mm PNC 912589 ☐
- Fixed side shelf, 300x900mm PNC 912590 ☐
- Fixed side shelf, 400x900mm PNC 912591 ☐
- Connecting rail kit for appliances with backsplash: modular 90 (on the left) to ProThermetic tilting (on the right), ProThermetic stationary (on the left) to ProThermetic tilting (on the right) PNC 912981 ☐
- Connecting rail kit for appliances with backsplash: modular 90 (on the right) to ProThermetic tilting (on the left), ProThermetic stationary (on the right) to ProThermetic tilting (on the left) PNC 912982 ☐
- Back panel, 900x700mm, for units with backsplash PNC 913014 ☐
- Back panel, 900x800mm, for units with backsplash PNC 913027 ☐
- Endrail kit, flush-fitting, with backsplash, left PNC 913117 ☐
- Endrail kit, flush-fitting, with backsplash, right PNC 913118 ☐
- Endrail kit (12.5mm) for thermaline 90 units with backsplash, left PNC 913208 ☐
- Endrail kit (12.5mm) for thermaline 90 units with backsplash, right PNC 913209 ☐
- U-clamping rail for back-to-back installations with backsplash (to be ordered as S-code) PNC 913226 ☐
- Insert profile d=900 PNC 913232 ☐

APPROVAL: _____



Experience the Excellence
www.electroluxprofessional.com


- | | | |
|---|------------|--------------------------|
| • Stainless steel side panel (12,5mm),
900x400mm, left side, wall mounted | PNC 913636 | ☐ |
| • Stainless steel side panel (12,5mm),
900x400mm, right side, wall mounted | PNC 913637 | ☐ |
| • Stainless steel side panel, 900x400mm,
flush-fitting, left side, wall mounted | PNC 913638 | ☐ |
| • Stainless steel side panel, 900x400mm,
flush-fitting, right side, wall mounted | PNC 913639 | ☐ |
| • Additional wall mounting fixation - US | PNC 913640 | ☐ |
| • Wall mounting kit top - TL85/90 -
Factory Fitted | PNC 913653 | ☐ |




Electrolux
PROFESSIONAL

Modular Cooking Range Line thermaline 90 - 900 mm Closed Work top, 1 Side with Backsplash


Front



Side

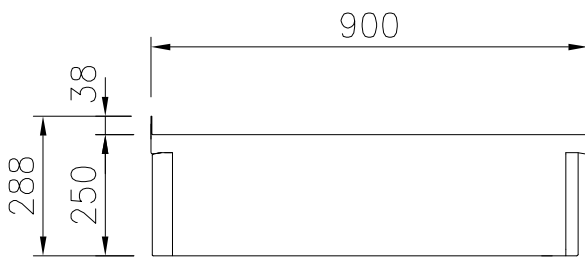

Top

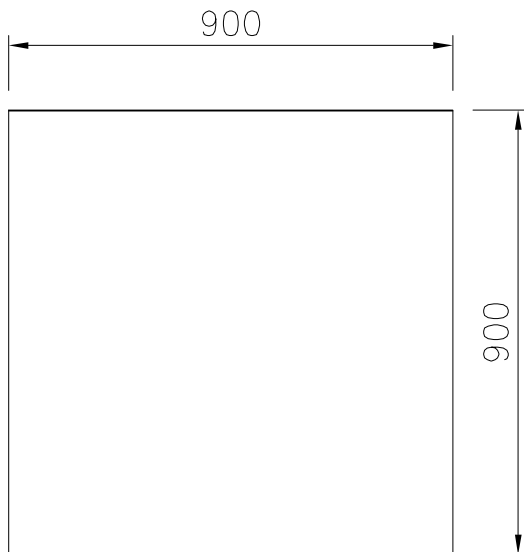

Key Information:

External dimensions, Width:

589167 (MCNABBIOOO) 900 mm

External dimensions, Depth: 900 mm

External dimensions, Height: 250 mm

Net weight: 32 kg



Modular Cooking Range Line
thermaline 90 - 900 mm Closed Work top, 1 Side with Backsplash

The company reserves the right to make modifications to the products
without prior notice. All information correct at time of printing.

2025.09.18