

Modular Cooking Range Line thermaline 90 - 900 mm Closed Work top, 1 Side with Backsplash

ITEM #		
MODEL #		
NAME #		
SIS #		
AIA #		



589167 (MCNABBIOOO)

Closed Work Top, one-side operated with backsplash

Short Form Specification

Item No.

Closed work top, 900 mm wide, constructed according to DIN 18860 2 with 20 mm drop nose top. Internal frame for heavy duty sturdiness in stainless steel. 2 mm top in 1.4301 (AISI 304). Flat surface construction, easily cleanable. THERMODUL connection system enables seamless worktop when units are connected and avoids soil penetrating.

IPX5 water resistant certification.

Configuration: One-side operated top with backsplash. The base needs to be supplied by the factory. Please include appropriate base.

Main Features

- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.

Construction

- IPX5 water resistance certification.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in 1.4301 (AISI 304).
- Unit constructed according to DIN 18860 2 with 20 mm drop nose top.

Insert profile d=900

Optional Accessories		
Connecting rail kit for appliances with backsplash, 900mm	PNC 91249	9 🗆
Portioning shelf, 900mm width	PNC 91252	7 🗖
 Portioning shelf, 900mm width 	PNC 91255	7 🗖
 Folding shelf, 300x900mm 	PNC 91258	1 🗆
 Folding shelf, 400x900mm 	PNC 91258	2 🗖
 Fixed side shelf, 200x900mm 	PNC 91258	9 🗆
 Fixed side shelf, 300x900mm 	PNC 91259	0 🗆
 Fixed side shelf, 400x900mm 	PNC 91259	1 🗆
 Connecting rail kit for appliances with backsplash: modular 90 (on the left) to ProThermetic tilting (on the right), ProThermetic stationary (on the left) to ProThermetic tilting (on the right) 	PNC 91298	1 🗅
Connecting rail kit for appliances with backsplash: modular 90 (on the right) to ProThermetic tilting (on the left), ProThermetic stationary (on the right) to ProThermetic tilting (on the left)	PNC 91298	2 🗖
• Back panel, 900x700mm, for units with backsplash	PNC 91301	4 🗖
• Back panel, 900x800mm, for units with backsplash	PNC 91302	7 🗆
 Endrail kit, flush-fitting, with backsplash, left 	PNC 913117	′ 🗅
 Endrail kit, flush-fitting, with backsplash, right 	PNC 913118	3 🗆
• Endrail kit (12.5mm) for thermaline 90 units with backsplash, left	PNC 91320	8 🗖
• Endrail kit (12.5mm) for thermaline 90 units with backsplash, right	PNC 91320	9 🗖
 U-clamping rail for back-to-back installations with backsplash (to be ordered as S-code) 	PNC 91322	6 🗖

PNC 913232 🚨

APPROVAL:






Modular Cooking Range Line thermaline 90 - 900 mm Closed Work top, 1 Side with Backsplash

 Stainless steel side panel (12,5mm), 900x400mm, left side, wall mounted 	PNC 913636	
 Stainless steel side panel (12,5mm), 900x400mm, right side, wall mounted 	PNC 913637	
 Stainless steel side panel, 900x400mm, flush-fitting, left side, wall mounted 	PNC 913638	
 Stainless steel side panel, 900x400mm, flush-fitting, right side, wall mounted 	PNC 913639	
 Additional wall mounting fixation - US 	PNC 913640	
 Wall mounting kit top - TL85/90 - Factory Fitted 	PNC 913653	



Modular Cooking Range Line thermaline 90 - 900 mm Closed Work top, 1 Side with Backsplash

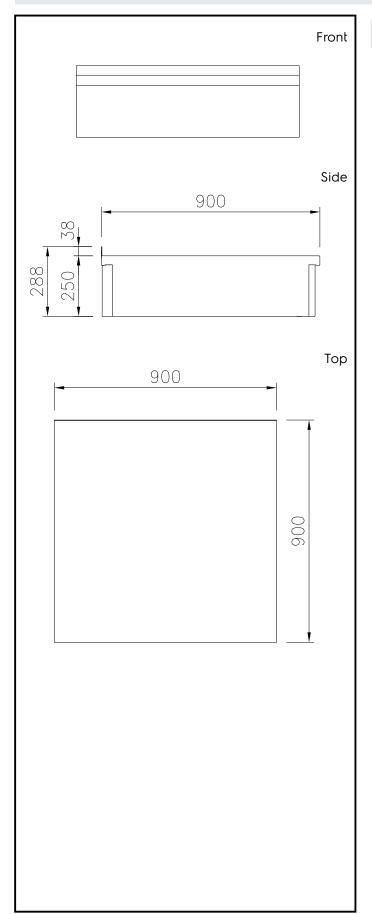

Key Information:

External dimensions, Width:

589167 (MCNABBIOOO)900 mmExternal dimensions, Depth:900 mmExternal dimensions, Height:250 mmNet weight:32 kg

Modular Cooking Range Line thermaline 90 - 900 mm Closed Work top, 1 Side with Backsplash