

Modular Cooking Range Line thermaline 90 - 1200 mm Closed Work top, 1 Side with Backsplash

ITEM #	
MODEL #	
NAME #	
SIS #	
AIA #	



589171 (MCNABBKOOO)

Closed Work Top, one-side operated with backsplash

Short Form Specification

Item No.

Closed work top, 1200 mm wide, constructed according to DIN 18860 2 with 20 mm drop nose top. Internal frame for heavy duty sturdiness in stainless steel. 2 mm top in 1.4301 (AISI 304). Flat surface construction, easily cleanable. THERMODUL connection system enables seamless worktop when units are connected and avoids soil penetrating.

IPX5 water resistant certification.

Configuration: One-side operated top with backsplash. The base needs to be supplied by the factory. Please include appropriate base.

Main Features

- IPX5 water resistance certification.
- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.

Construction

- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in 1.4301 (AISI 304).
- Unit constructed according to DIN 18860_2 with 20 mm drop nose top.

• Insert profile d=900

	·				
Optional Accessories					
•	Connecting rail kit for appliances with backsplash, 900mm	PNC	912499		
•	Portioning shelf, 1200mm width	PNC	912530		
•	Portioning shelf, 1200mm width	PNC	912560		
•	Folding shelf, 300x900mm	PNC	912581		
•	Folding shelf, 400x900mm	PNC	912582		
•	Fixed side shelf, 200x900mm	PNC	912589		
•	Fixed side shelf, 300x900mm	PNC	912590		
•	Fixed side shelf, 400x900mm	PNC	912591		
•	Connecting rail kit for appliances with backsplash: modular 90 (on the left) to ProThermetic tilting (on the right), ProThermetic stationary (on the left) to ProThermetic tilting (on the right)	PNC	912981		
•	Connecting rail kit for appliances with backsplash: modular 90 (on the right) to ProThermetic tilting (on the left), ProThermetic stationary (on the right) to ProThermetic tilting (on the left)	PNC	912982		
•	Back panel, 1200x700mm, for units with backsplash	PNC	913017		
•	Back panel, 1200x800mm, for units with backsplash	PNC	913030		
•	Endrail kit, flush-fitting, with backsplash, left	PNC	913117		
•	Endrail kit, flush-fitting, with backsplash, right	PNC	913118		
•	Endrail kit (12.5mm) for thermaline 90 units with backsplash, left	PNC	913208		
•	Endrail kit (12.5mm) for thermaline 90 units with backsplash, right	PNC	913209		
•	U-clamping rail for back-to-back installations with backsplash	PNC	913226		


PNC 913232 🚨

APPROVAL:





Modular Cooking Range Line thermaline 90 - 1200 mm Closed Work top, 1 Side with Backsplash

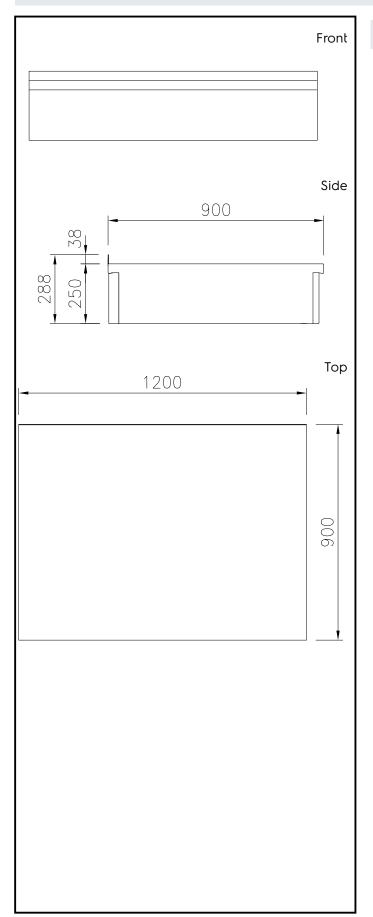

Key Information:

External dimensions, Width:

589171 (MCNABBKOOO)1200 mmExternal dimensions, Depth:900 mmExternal dimensions, Height:250 mmNet weight:40 kg