

Modular Cooking Range Line thermaline 90 - 900 mm Open base, 1 Side (H2) - H=450

ITEM #	
MODEL #	
NAME #	
SIS #	
AIA #	



589175 (MC1ACAIOOO)

Open Base, one-side operated - H2

Short Form Specification

Item No.

900 mm wide open base compartment to store pots, pans, sheet pans, etc. with hygienic design and round edges. Internal frame for heavy duty sturdiness in stainless steel. Flat surface construction, easily cleanable.

IPX5 water resistant certification.

Configuration: One-side operated freestanding base, hygienic class H2.

Main Features

- Open base compartment for storage of pots, pans, sheet pans, etc.
- All major components may be easily accessed from the front.
- Unit to be placed below modular top appliances to store pots, pans, sheet pans, etc.

Construction

- Hygienic design of the open base compartment with large round edges.
- IPX5 water resistance certification.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in stainless steel.


APPROVAL:





Modular Cooking Range Line thermaline 90 - 900 mm Open base, 1 Side (H2) - H=450

23 kg

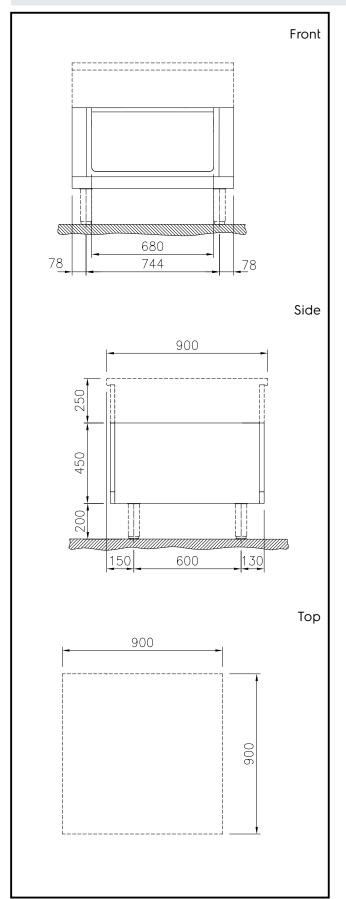

Key Information:

Net weight:

External dimensions, Width: 589175 (MC1ACAIOOO) 900 mm External dimensions, Depth: 900 mm External dimensions, Height: 450 mm **Cupboard Cavity Dimensions** (width): 680 mm **Cupboard Cavity Dimensions** 330 mm (height): **Cupboard Cavity Dimensions** 740 mm (depth):





Modular Cooking Range Line thermaline 90 - 900 mm Open base, 1 Side (H2) - H=450

		• Stainless steel side panel,	PNC 913688	
Optional AccessoriesStainless steel side panel,	PNC 912512	900x700mm, flush-fitting (it should only be used against the wall,		
900x700mm, freestanding		against a niche and in between		
 Stainless steel front kicking strip, 900mm width 	PNC 912635	Electrolux Professional thermaline and ProThermetic appliances and external appliances - provided that		
 Stainless steel side kicking strip left and right, freestanding, 900mm width 	PNC 912657	these have at least the same dimensions)		
 Stainless steel side kicking strips left and right, against the wall, 900mm width 	PNC 912660			
 Stainless steel side kicking strip left and right, back-to-back, 1810mm width 	PNC 912663			
 Stainless steel plinth, against wall, 900mm width 	PNC 912940			
 Stainless steel plinth, freestanding, 900mm width 	PNC 912959			
 Stainless steel panel, 900x700mm, against wall, left side 	PNC 913101			
 Stainless steel panel, 900x700mm, against wall, right side 	PNC 913105			
 Back panel, 900x450mm, for bases one-side operated 	PNC 913168			
 Stainless steel side panel, left, H=700 	PNC 913222			
 Stainless steel side panel, right, H=700 	PNC 913223			
 Perforated shelf for warming cabinets and cupboard bases (one-side operated TL80-85-90 and two-side operated for TL80) 	PNC 913235			
 Side reinforced panel only in combination with side shelf, for freestanding units 	PNC 913260			
 Side reinforced panel only in combination with side shelf, for against the wall installations, left 	PNC 913267			
 Side reinforced panel only in combination with side shelf, for against the wall installations, right 	PNC 913269			
 Side reinforced panel only in combination with side shelf, for back-to-back installations, left 	PNC 913275			
 Side reinforced panel only in combination with side shelf, for back-to-back installation, right 	PNC 913276			
 Shelf fixation for TL80-85-90 one- side operated, TL80 two-side operated 	PNC 913283			
 Stainless steel dividing panel, 900x700mm, (it should only be used between Electrolux 	PNC 913672			



Professional thermaline Modular

90 and thermaline C90)