

Modular Cooking Range Line thermaline 90 - 1200 mm Open base, 1 Side (H2) - H=450

ITEM #	
MODEL #	
NAME #	
SIS #	
AIA#	
AIA "	



589177 (MC1ACAKOOO)

Open Base, one-side operated - H2

Short Form Specification

Item No.

1200 mm wide open base compartment to store pots, pans, sheet pans, etc. with hygienic design and round edges. Internal frame for heavy duty sturdiness in stainless steel. Flat surface construction, easily cleanable.

IPX5 water resistant certification.

Configuration: One-side operated freestanding base, hygienic class H2.

Main Features

- Open base compartment for storage of pots, pans, sheet pans, etc.
- All major components may be easily accessed from the front.
- Unit to be placed below modular top appliances to store pots, pans, sheet pans, etc.

Construction


- Hygienic design of the open base compartment with large round edges.
- IPX5 water resistance certification.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in stainless steel.

APPROVAL:





Modular Cooking Range Line thermaline 90 - 1200 mm Open base, 1 Side (H2) - H=450

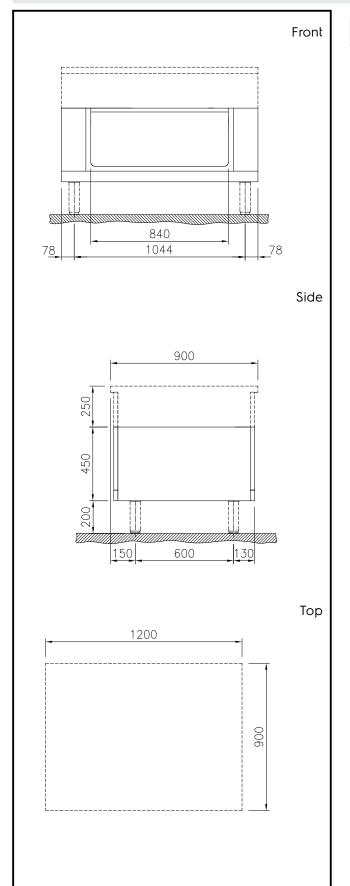

Key Information:

External dimensions, Width: 589177 (MC1ACAKOOO) 1200 mm External dimensions, Depth: 900 mm External dimensions, Height: 450 mm **Cupboard Cavity Dimensions** (width): 840 mm **Cupboard Cavity Dimensions** 330 mm (height):

Cupboard Cavity Dimensions (depth):

740 mm Net weight: 26 kg





left and right, back-to-back,

• Stainless steel plinth, against

freestanding, 1200mm width

900x700mm, against wall, left

900x700mm, against wall, right

• Back panel, 1200x450mm, for

• Stainless steel side panel, right,

cabinets and cupboard bases (one-side operated TL80-85-90 and two-side operated for TL80) • Side reinforced panel only in

combination with side shelf, for

combination with side shelf, for against the wall installations, left • Side reinforced panel only in

combination with side shelf, for against the wall installations,

combination with side shelf, for back-to-back installation, right

side operated, TL80 two-side

Stainless steel dividing panel,

90 and thermaline C90)

900x700mm, (it should only be used between Electrolux Professional thermaline Modular

• Side reinforced panel only in

• Side reinforced panel only in combination with side shelf, for back-to-back installations, left • Side reinforced panel only in

• Perforated shelf for warming

freestanding units

bases one-side operated • Stainless steel side panel, left,

1810mm width

wall, 1200mm width

Stainless steel plinth,

• Stainless steel panel,

Stainless steel panel,

side

H=700

H=700

right

operated

Modular Cooking Range Line thermaline 90 - 1200 mm Open base, 1 Side (H2) - H=450

PNC 913688

Optional Accessories • Stainless steel side panel, 900x700mm, freestanding	PNC 912512		Stainless steel side panel, 900x700mm, flush-fitting (it should only be used against the wall, against a niche and in between Electrolux Professional thermaline and ProThermetic appliances and external appliances - provided that these have at least the same dimensions)
 Stainless steel front kicking strip, 1200mm width Stainless steel side kicking strip 	PNC 912638 PNC 912657		
left and right, freestanding, 900mm width			
 Stainless steel side kicking strips left and right, against the wall, 900mm width 	PNC 912660		
 Stainless steel side kicking strip 	PNC 912663		

PNC 912943 📮

PNC 912962 📮

PNC 913101 🚨

PNC 913105 📮

PNC 913171 🚨

PNC 913222 🔲

PNC 913223 🔲

PNC 913239 🔲

PNC 913260 📮

PNC 913267 🔲

PNC 913269 📮

PNC 913275 📮

PNC 913276 🔲

PNC 913672 📮



Shelf fixation for TL80-85-90 one- PNC 913279