

## Modular Cooking Range Line thermaline 90 - 500 mm Open base, GN conform, 1 Side (H2) - H=450

ITEM #	
MODEL "	
MODEL #	
NAME #	
CIC "	
SIS #	
AIA#	



589179 (MC1BCAEOOO)

Open Base, one-side operated, GN - H2

## **Short Form Specification**

#### Item No.

500 mm wide open base compartment to store pots, pans, sheet pans, etc. with hygienic design and round edges. Unit constructed according to DIN 18860\_2 with 70 mm recessed plinth. Internal frame for heavy duty sturdiness in stainless steel. Flat surface construction, easily cleanable. Open storage space in the base accepts GN 1/1 containers.

IPX5 water resistant certification.

Configuration: One-side operated freestanding base, hygienic class H2

### **Main Features**

- IPX5 water resistance certification.
- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Unit constructed according to DIN 18860\_2 with 70 mm recessed plinth.

#### Construction


- Hygienic design of the open base compartment with large round edges.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Storage space in the base of the appliance that can accept GN1/1 containers.
- Internal frame for heavy duty sturdiness in stainless steel.

#### APPROVAL:





# Modular Cooking Range Line thermaline 90 - 500 mm Open base, GN conform, 1 Side (H2) - H=450

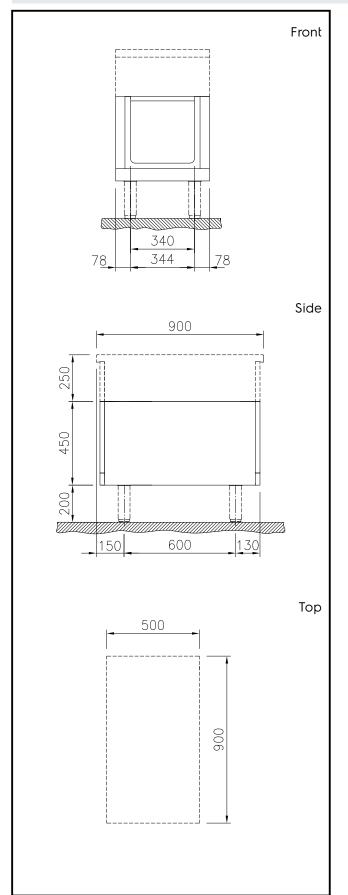

### **Key Information:**

External dimensions, Width:
589179 (MC1BCAEOOO)
500 mm
External dimensions, Depth:
900 mm
External dimensions, Height:
450 mm
Cupboard Cavity Dimensions (width):
340 mm
Cupboard Cavity Dimensions (height):
330 mm

(height):
Cupboard Cavity Dimensions

(depth): Net weight: 740 mm 19 kg





# Modular Cooking Range Line thermaline 90 - 500 mm Open base, GN conform, 1 Side (H2) - H=450

		Stainless steel side panel,	PNC 913688	
Optional Accessories	DNIC 010E10	900x700mm, flush-fitting (it should only be used against the wall,		
<ul> <li>Stainless steel side panel, 900x700mm, freestanding</li> </ul>	PNC 912512	against a niche and in between Electrolux Professional thermaline		
<ul> <li>Stainless steel front kicking strip, 500mm width</li> </ul>	PNC 912631	and ProThermetic appliances and external appliances - provided that		
<ul> <li>Stainless steel side kicking strip left and right, freestanding, 900mm width</li> </ul>	PNC 912657	these have at least the same dimensions)		
<ul> <li>Stainless steel side kicking strips left and right, against the wall, 900mm width</li> </ul>	PNC 912660			
<ul> <li>Stainless steel side kicking strip left and right, back-to-back, 1810mm width</li> </ul>	PNC 912663			
<ul> <li>Stainless steel plinth, against wall, 500mm width</li> </ul>	PNC 912936			
<ul> <li>Stainless steel plinth, freestanding, 500mm width</li> </ul>	PNC 912955			
Stainless steel panel, 900x700mm, against wall, left side	PNC 913101			
<ul> <li>Stainless steel panel, 900x700mm, against wall, right side</li> </ul>	PNC 913105			
Back panel, 500x450mm, for bases one-side operated	PNC 913164			
• Stainless steel side panel, left, H=700	PNC 913222			
• Stainless steel side panel, right, H=700	PNC 913223			
<ul> <li>Perforated shelf for warming cabinets and cupboard bases (one-side operated TL80-85-90 and two-side operated for TL80)</li> </ul>	PNC 913233			
<ul> <li>Side reinforced panel only in combination with side shelf, for freestanding units</li> </ul>	PNC 913260			
Side reinforced panel only in combination with side shelf, for against the wall installations, left	PNC 913267			
<ul> <li>Side reinforced panel only in combination with side shelf, for against the wall installations, right</li> </ul>	PNC 913269			
<ul> <li>Side reinforced panel only in combination with side shelf, for back-to-back installations, left</li> </ul>	PNC 913275			
<ul> <li>Side reinforced panel only in combination with side shelf, for back-to-back installation, right</li> </ul>	PNC 913276			
<ul> <li>Shelf fixation for TL80-85-90 one- side operated, TL80 two-side operated</li> </ul>	PNC 913279			
<ul> <li>Stainless steel dividing panel, 900x700mm, (it should only be used between Electrolux Professional thermaline Modular 90 and thermaline C90)</li> </ul>	PNC 913672			

