

Modular Cooking Range Line thermaline 90 - 800 mm Open base, GN conform, 1 Side (H2) - H=450

ITEM #	
MODEL #	
NAME #	
SIS #	
AIA#	
AIA "	



589181 (MC1BCAHOOO)

Open Base, one-side operated, GN - H2

Short Form Specification

Item No.

800 mm wide open base compartment to store pots, pans, sheet pans, etc. with hygienic design and round edges. Internal frame for heavy duty sturdiness in stainless steel. Flat surface construction, easily cleanable. Open storage space in the base accepts GN 1/1 containers.

IPX5 water resistant certification.

Configuration: One-side operated freestanding base, hygienic class H2.

Main Features

- All major components may be easily accessed from the front.
- Unit to be placed below modular top appliances to store pots, pans, sheet pans, etc.

Construction


- IPX5 water resistance certification.
- Hygienic design of the open base compartment with large round edges.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Storage space in the base of the appliance that can accept GN1/1 containers.
- Internal frame for heavy duty sturdiness in stainless steel.

APPROVAL:





Modular Cooking Range Line thermaline 90 - 800 mm Open base, GN conform, 1 Side (H2) - H=450

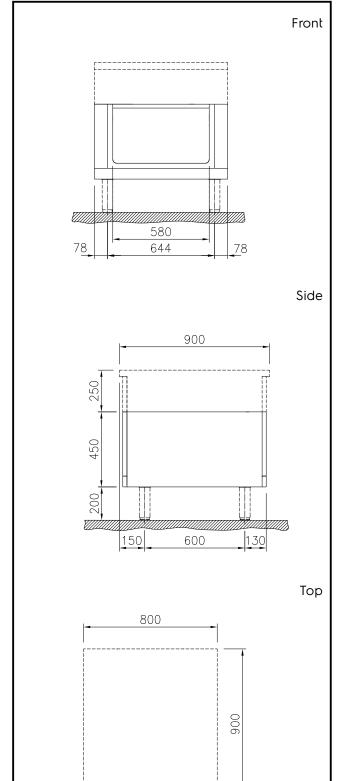

Key Information:

External dimensions, Width: 589181 (MC1BCAHOOO) External dimensions, Depth:

800 mm 900 mm External dimensions, Height: 450 mm

Cupboard Cavity Dimensions

580 mm

Cupboard Cavity Dimensions

(height):

330 mm

Cupboard Cavity Dimensions (depth):

740 mm

Net weight:

22 kg





Modular Cooking Range Line thermaline 90 - 800 mm Open base, GN conform, 1 Side (H2) - H=450

		Stainless steel side panel,	PNC 913688	
Optional Accessories	DNIC 010E10	900x700mm, flush-fitting (it should only be used against the wall,		
 Stainless steel side panel, 900x700mm, freestanding 	PNC 912512	against a niche and in between Electrolux Professional thermaline		
 Stainless steel front kicking strip, 800mm width 	PNC 912634	and ProThermetic appliances and external appliances - provided that		
 Stainless steel side kicking strip left and right, freestanding, 900mm width 	PNC 912657	these have at least the same dimensions)		
 Stainless steel side kicking strips left and right, against the wall, 900mm width 	PNC 912660			
 Stainless steel side kicking strip left and right, back-to-back, 1810mm width 	PNC 912663			
 Stainless steel plinth, against wall, 800mm width 	PNC 912939			
 Stainless steel plinth, freestanding, 800mm width 	PNC 912958			
 Stainless steel panel, 900x700mm, against wall, left side 	PNC 913101			
 Stainless steel panel, 900x700mm, against wall, right side 	PNC 913105			
Back panel, 800x450mm, for bases one-side operated	PNC 913167			
• Stainless steel side panel, left, H=700	PNC 913222			
• Stainless steel side panel, right, H=700	PNC 913223			
 Perforated shelf for warming cabinets and cupboard bases (one-side operated TL80-85-90 and two-side operated for TL80) 	PNC 913234			
 Side reinforced panel only in combination with side shelf, for freestanding units 	PNC 913260			
 Side reinforced panel only in combination with side shelf, for against the wall installations, left 	PNC 913267			
 Side reinforced panel only in combination with side shelf, for against the wall installations, right 	PNC 913269			
 Side reinforced panel only in combination with side shelf, for back-to-back installations, left 	PNC 913275			
 Side reinforced panel only in combination with side shelf, for back-to-back installation, right 	PNC 913276			
 Shelf fixation for TL80-85-90 one- side operated, TL80 two-side operated 	PNC 913281			
 Stainless steel dividing panel, 900x700mm, (it should only be used between Electrolux Professional thermaline Modular 90 and thermaline C90) 	PNC 913672			

