

Modular Cooking Range Line thermaline 90 - 600 mm Cupboard base with 1 door, GN conform, 1 Side (H2) -H=450



589184 (MC1DCAFOOO)

Cupboard Base with 1 door, one-side operated, GN - H2

## **Short Form Specification**

### Item No.

600 mm wide cupboard base with 1 door with hygienic design and round edges. Unit constructed according to DIN 18860\_2 with 70 mm recessed plinth. Internal frame for heavy duty sturdiness in stainless steel. Flat surface construction, easily cleanable. Cupboard storage space accepts GN 1/1 containers. IPX5 water resistant certification.

Configuration: One-side operated freestanding base, hygienic class H2.

ITEM #	
MODEL #	_
NAME #	
<u>SIS #</u>	
AIA #	

## **Main Features**

- IPX5 water resistance certification.
- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Unit constructed according to DIN 18860\_2 with 70 mm recessed plinth.
- Cupboard compartment for storage of pots, pans, sheet pans etc.


## Construction

- Hygienic design of the base cupboard with large round edges.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Storage space in the base of the appliance accepts GN1/1 containers.
- Internal frame for heavy duty sturdiness in stainless steel.

### APPROVAL:

# Electrolux PROFESSIONAL

### Modular Cooking Range Line thermaline 90 - 600 mm Cupboard base with 1 door, GN conform, 1 Side (H2) - H=450

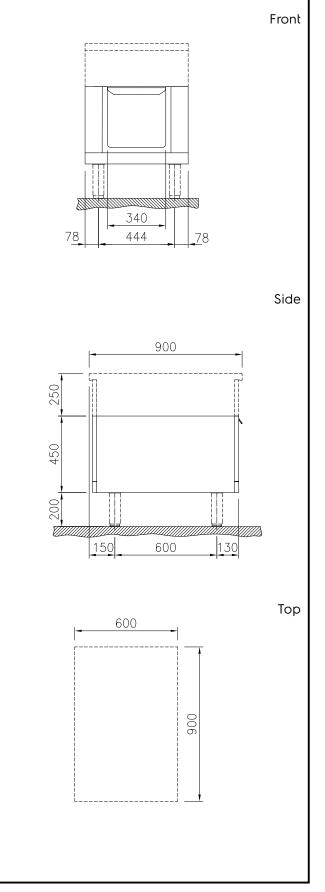

CE

DNVGL

## Key Information:

External dimensions, Width:	
589184 (MC1DCAFOOO)	600 mm
External dimensions, Depth:	900 mm
External dimensions, Height:	450 mm
Cupboard Cavity Dimensions (width):	340 mm
Cupboard Cavity Dimensions (height):	330 mm
Cupboard Cavity Dimensions (depth):	715 mm
Net weight:	24 kg

Modular Cooking Range Line thermaline 90 - 600 mm Cupboard base with 1 door, GN conform, 1 Side (H2) - H=450 The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.



### Modular Cooking Range Line thermaline 90 - 600 mm Cupboard base with 1 door, GN conform, 1 Side (H2) - H=450

# **Optional Accessories**

Optional Accessories		
<ul> <li>Stainless steel side panel, 900x700mm, freestanding</li> </ul>	PNC 912512	
Stainless steel front kicking strip, 600mm width	PNC 912632	
<ul> <li>Stainless steel side kicking strip left and right, freestanding, 900mm width</li> </ul>	PNC 912657	
<ul> <li>Stainless steel side kicking strips left and right, against the wall, 900mm width</li> </ul>	PNC 912660	
<ul> <li>Stainless steel side kicking strip left and right, back-to-back, 1810mm width</li> </ul>	PNC 912663	
<ul> <li>Stainless steel plinth, against wall, 600mm width</li> </ul>	PNC 912937	
<ul> <li>Stainless steel plinth, freestanding, 600mm width</li> </ul>	PNC 912956	
<ul> <li>Stainless steel panel, 900x700mm, against wall, left side</li> </ul>	PNC 913101	
<ul> <li>Stainless steel panel, 900x700mm, against wall, right side</li> </ul>	PNC 913105	
<ul> <li>Back panel, 600x450mm, for bases one-side operated</li> </ul>	PNC 913165	
<ul> <li>Stainless steel side panel, left, H=700</li> </ul>	PNC 913222	
<ul> <li>Stainless steel side panel, right, H=700</li> </ul>	PNC 913223	
<ul> <li>Perforated shelf for warming cabinets and cupboard bases (one-side operated TL80-85-90 and two-side operated for TL80)</li> </ul>	PNC 913233	
<ul> <li>Side reinforced panel only in combination with side shelf, for freestanding units</li> </ul>	PNC 913260	
• Side reinforced panel only in combination with side shelf, for against the wall installations, left	PNC 913267	
<ul> <li>Side reinforced panel only in combination with side shelf, for against the wall installations, right</li> </ul>	PNC 913269	
<ul> <li>Side reinforced panel only in combination with side shelf, for back-to-back installations, left</li> </ul>	PNC 913275	
<ul> <li>Side reinforced panel only in combination with side shelf, for back-to-back installation, right</li> </ul>	PNC 913276	
• Shelf fixation for TL80-85-90 one- side operated, TL80 two-side operated	PNC 913279	
• Stainless steel dividing panel, 900x700mm, (it should only be used between Electrolux Professional thermaline Modular 90 and thermaline C90)	PNC 913672	

 Stainless steel side panel, 900x700mm, flush-fitting (it should only be used against the wall, against a niche and in between Electrolux Professional thermaline and ProThermetic appliances and external appliances - provided that these have at least the same dimensions)