

Modular Cooking Range Line thermaline 90 - 600 mm Cupboard base with 1 door, GN conform, 1 Side (H2) -H=450

ITEM #		
MODEL #		
i-lobel "		
NAME #		
SIS #		
AIA #		



589184 (MC1DCAFOOO)

Cupboard Base with 1 door, one-side operated, GN - H2

# **Short Form Specification**

#### Item No.

600 mm wide cupboard base with 1 door with hygienic design and round edges. Internal frame for heavy duty sturdiness in stainless steel. Flat surface construction, easily cleanable. Cupboard storage space accepts GN 1/1 containers.

IPX5 water resistant certification.

Configuration: One-side operated freestanding base, hygienic class H2.

## **Main Features**

- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Unit constructed according to DIN 18860\_2 with 70 mm recessed plinth.
- Cupboard compartment for storage of pots, pans, sheet pans etc.


#### Construction

- IPX5 water resistance certification.
- Hygienic design of the base cupboard with large round edges.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Storage space in the base of the appliance accepts GN1/1 containers.
- Internal frame for heavy duty sturdiness in stainless steel.

#### APPROVAL:





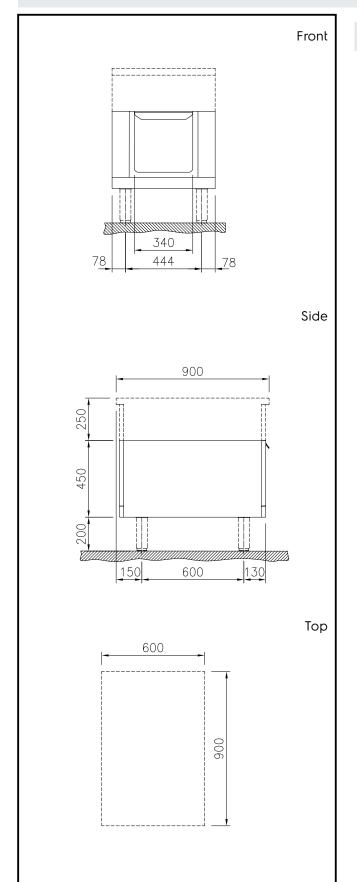

## **Key Information:**

External dimensions, Width:	
589184 (MCIDCAFOOO)	600 mm
External dimensions, Depth:	900 mm
External dimensions, Height:	450 mm
Cupboard Cavity Dimensions (width):	340 mm
Cupboard Cavity Dimensions (height):	330 mm
Cupboard Cavity Dimensions (depth): Net weight:	715 mm 24 kg





# Modular Cooking Range Line thermaline 90 - 600 mm Cupboard base with 1 door, GN conform, 1 Side (H2) - H=450

			Stainless steel side panel,	PNC 913688	
<ul><li>Optional Accessories</li><li>Stainless steel side panel,</li></ul>	PNC 912512		900x700mm, flush-fitting (it should only be used against the wall,		
900x700mm, freestanding			against a niche and in between Electrolux Professional thermaline		
<ul> <li>Stainless steel front kicking strip, 600mm width</li> </ul>	PNC 912632	Ц	and ProThermetic appliances and external appliances - provided that		
<ul> <li>Stainless steel side kicking strip left and right, freestanding, 900mm width</li> </ul>	PNC 912657		these have at least the same dimensions)		
<ul> <li>Stainless steel side kicking strips left and right, against the wall, 900mm width</li> </ul>	PNC 912660				
<ul> <li>Stainless steel side kicking strip left and right, back-to-back, 1810mm width</li> </ul>	PNC 912663				
<ul> <li>Stainless steel plinth, against wall, 600mm width</li> </ul>	PNC 912937				
<ul> <li>Stainless steel plinth, freestanding, 600mm width</li> </ul>	PNC 912956				
Stainless steel panel, 900x700mm, against wall, left side	PNC 913101				
<ul> <li>Stainless steel panel, 900x700mm, against wall, right side</li> </ul>	PNC 913105				
<ul> <li>Back panel, 600x450mm, for bases one-side operated</li> </ul>	PNC 913165				
• Stainless steel side panel, left, H=700	PNC 913222				
• Stainless steel side panel, right, H=700	PNC 913223				
<ul> <li>Perforated shelf for warming cabinets and cupboard bases (one-side operated TL80-85-90 and two-side operated for TL80)</li> </ul>	PNC 913233				
<ul> <li>Side reinforced panel only in combination with side shelf, for freestanding units</li> </ul>	PNC 913260				
<ul> <li>Side reinforced panel only in combination with side shelf, for against the wall installations, left</li> </ul>	PNC 913267				
<ul> <li>Side reinforced panel only in combination with side shelf, for against the wall installations, right</li> </ul>	PNC 913269				
<ul> <li>Side reinforced panel only in combination with side shelf, for back-to-back installations, left</li> </ul>	PNC 913275				
<ul> <li>Side reinforced panel only in combination with side shelf, for back-to-back installation, right</li> </ul>	PNC 913276				
<ul> <li>Shelf fixation for TL80-85-90 one- side operated, TL80 two-side operated</li> </ul>	PNC 913279				
<ul> <li>Stainless steel dividing panel, 900x700mm, (it should only be used between Electrolux Professional thermaline Modular 90 and thermaline C90)</li> </ul>	PNC 913672				

