

Modular Cooking Range Line thermaline 90 - 600 mm Cupboard base with 1 door, GN conform, 1 Side (H2) -H=450

ITEM #		
MODEL #		
i-lobel "		
NAME #		
SIS #		
AIA #		



589184 (MC1DCAFOOO)

Cupboard Base with 1 door, one-side operated, GN - H2

Short Form Specification

Item No.

600 mm wide cupboard base with 1 door with hygienic design and round edges. Internal frame for heavy duty sturdiness in stainless steel. Flat surface construction, easily cleanable. Cupboard storage space accepts GN 1/1 containers.

IPX5 water resistant certification.

Configuration: One-side operated freestanding base, hygienic class H2.

Main Features

- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Unit constructed according to DIN 18860_2 with 70 mm recessed plinth.
- Cupboard compartment for storage of pots, pans, sheet pans etc.

Construction


- IPX5 water resistance certification.
- Hygienic design of the base cupboard with large round edges.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Storage space in the base of the appliance accepts GN1/1 containers.
- Internal frame for heavy duty sturdiness in stainless steel.

APPROVAL:



24 kg



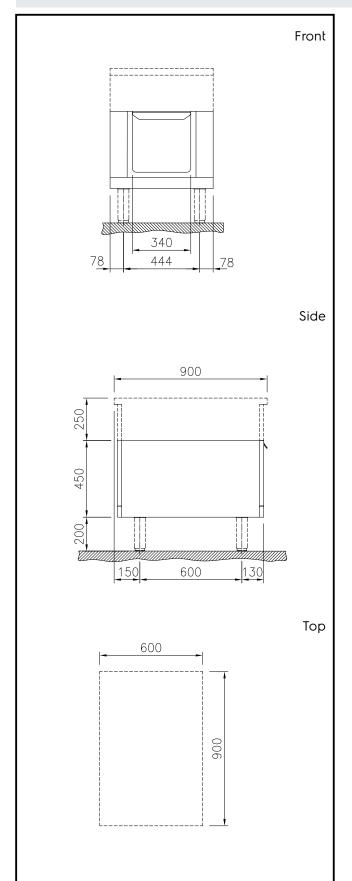

Key Information:

Net weight:

External dimensions, Width: 589184 (MCIDCAFOOO) 600 mm External dimensions, Depth: 900 mm External dimensions, Height: 450 mm **Cupboard Cavity Dimensions** (width): 340 mm **Cupboard Cavity Dimensions** 330 mm (height): **Cupboard Cavity Dimensions** (depth): 715 mm





Modular Cooking Range Line thermaline 90 - 600 mm Cupboard base with 1 door, GN conform, 1 Side (H2) - H=450

		Stainless steel side panel,	PNC 913688	
Optional Accessories	DNIC 010510	900x700mm, flush-filting (it should only be used against the wall,		
 Stainless steel side panel, 900x700mm, freestanding 	PNC 912512	against a niche and in between Electrolux Professional thermaline		
 Stainless steel front kicking strip, 600mm width 	PNC 912632	and ProThermetic appliances and external appliances - provided that		
 Stainless steel side kicking strip left and right, freestanding, 900mm width 	PNC 912657	these have at least the same dimensions)		
 Stainless steel side kicking strips left and right, against the wall, 900mm width 	PNC 912660			
 Stainless steel side kicking strip left and right, back-to-back, 1810mm width 	PNC 912663			
 Stainless steel plinth, against wall, 600mm width 	PNC 912937			
 Stainless steel plinth, freestanding, 600mm width 	PNC 912956			
Stainless steel panel, 900x700mm, against wall, left side	PNC 913101			
 Stainless steel panel, 900x700mm, against wall, right side 	PNC 913105			
 Back panel, 600x450mm, for bases one-side operated 	PNC 913165			
• Stainless steel side panel, left, H=700	PNC 913222			
• Stainless steel side panel, right, H=700	PNC 913223			
 Perforated shelf for warming cabinets and cupboard bases (one-side operated TL80-85-90 and two-side operated for TL80) 	PNC 913233			
 Side reinforced panel only in combination with side shelf, for freestanding units 	PNC 913260			
 Side reinforced panel only in combination with side shelf, for against the wall installations, left 	PNC 913267			
 Side reinforced panel only in combination with side shelf, for against the wall installations, right 	PNC 913269			
 Side reinforced panel only in combination with side shelf, for back-to-back installations, left 	PNC 913275			
 Side reinforced panel only in combination with side shelf, for back-to-back installation, right 	PNC 913276			
 Shelf fixation for TL80-85-90 one- side operated, TL80 two-side operated 	PNC 913279			
 Stainless steel dividing panel, 900x700mm, (it should only be used between Electrolux Professional thermaline Modular 90 and thermaline C90) 	PNC 913672			

