

Modular Cooking Range Line thermaline 90 - 800 mm Cupboard base with 2 doors, GN conform, 1 Side (H2) -H=450

ITEM #
MODEL #
NAME #
SIS #
AIA#



589186 (MC1FCAHOOO)

Cupboard Base with 2 doors, one-side operated, GN - H2

# **Short Form Specification**

### Item No.

800 mm wide cupboard base with 2 doors with hygienic design and round edges. Internal frame for heavy duty sturdiness in stainless steel. Flat surface construction, easily cleanable. Cupboard storage space accepts GN 1/1 containers.

IPX5 water resistant certification.

Configuration: One-side operated freestanding base, hygienic class H2.

# **Main Features**

- Cupboard compartment for storage of pots, pans, sheet pans etc.
- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Unit constructed according to DIN 18860\_2 with 70 mm recessed plinth.

### Construction

- IPX5 water resistance certification.
- Hygienic design of the base cupboard with large round edges.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Storage space in the base of the appliance accepts GN1/1 containers.
- Internal frame for heavy duty sturdiness in stainless steel.

## **Optional Accessories**

•	Stainless steel side panel, 900x700mm, freestanding	PNC	912512	
•	Stainless steel front kicking strip, 800mm width	PNC	912634	
•	Stainless steel side kicking strip left and right, freestanding, 900mm width	PNC	912657	
•	Stainless steel side kicking strips left and right, against the wall, 900mm width	PNC	912660	
•	Stainless steel side kicking strip left and right, back-to-back, 1810mm width	PNC	912663	
•	Stainless steel plinth, against wall, 800mm width	PNC	912939	
•	Stainless steel plinth, freestanding, 800mm width	PNC	912958	
•	Stainless steel panel, 900x700mm, against wall, left side	PNC	913101	
•	Stainless steel panel, 900x700mm, against wall, right side	PNC	913105	
•	Back panel, 800x450mm, for bases one-side operated	PNC	913167	
•	Stainless steel side panel, left, H=700	PNC	913222	
•	Stainless steel side panel, right, H=700	PNC	913223	

#### APPROVAL:








<ul> <li>Perforated shelf for warming cabinets and cupboard bases (one-side operated TL80-85-90 and two-side operated for TL80)</li> </ul>	PNC 913234	
<ul> <li>Side reinforced panel only in combination with side shelf, for freestanding units</li> </ul>	PNC 913260	
Side reinforced panel only in combination with side shelf, for against the wall installations, left	PNC 913267	
Side reinforced panel only in combination with side shelf, for against the wall installations, right	PNC 913269	
<ul> <li>Side reinforced panel only in combination with side shelf, for back- to-back installations, left</li> </ul>	PNC 913275	
<ul> <li>Side reinforced panel only in combination with side shelf, for back- to-back installation, right</li> </ul>	PNC 913276	
• Shelf fixation for TL80-85-90 one-side operated, TL80 two-side operated	PNC 913281	
Stainless steel dividing panel, 900x700mm, (it should only be used between Electrolux Professional thermaline Modular 90 and thermaline C90)	PNC 913672	
• Stainless steel side panel, 900x700mm, flush-fitting (it should only be used against the wall, against a niche and in between Electrolux Professional thermaline and ProThermetic appliances and external appliances provided that these have at least the same dimensions)	PNC 913688	



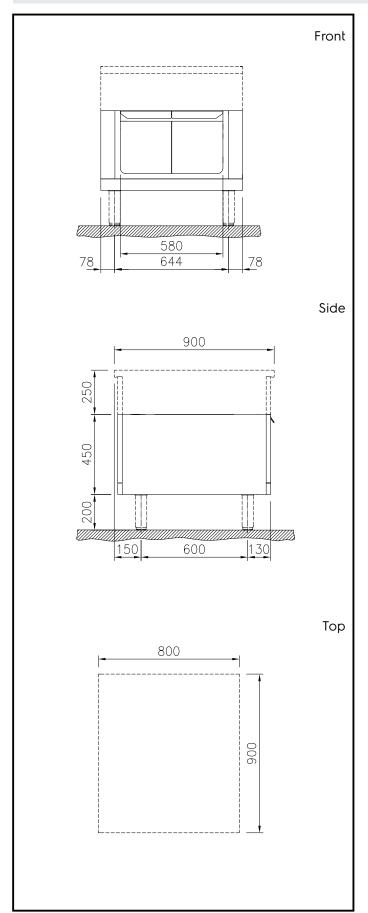

## **Key Information:**

External dimensions, Width:

589186 (MC1FCAHOOO) 800 mm External dimensions, Depth: 900 mm External dimensions, Height: 450 mm

**Cupboard Cavity Dimensions** (width):

580 mm

**Cupboard Cavity Dimensions** 

(height):

330 mm

**Cupboard Cavity Dimensions** (depth):

715 mm 30 kg

Net weight: