

Modular Cooking Range Line thermaline 90 - 800 mm Cupboard base with 2 doors, GN conform, 1 Side (H2) -H=450

ITEM #
MODEL #
NAME #
SIS #
AIA#



589186 (MC1FCAHOOO)

Cupboard Base with 2 doors, one-side operated, GN - H2

# **Short Form Specification**

### Item No.

800 mm wide cupboard base with 2 doors with hygienic design and round edges. Internal frame for heavy duty sturdiness in stainless steel. Flat surface construction, easily cleanable. Cupboard storage space accepts GN 1/1 containers.

IPX5 water resistant certification.

Configuration: One-side operated freestanding base, hygienic class H2.

# **Main Features**

- Cupboard compartment for storage of pots, pans, sheet pans etc.
- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Unit constructed according to DIN 18860\_2 with 70 mm recessed plinth.

### Construction

- IPX5 water resistance certification.
- Hygienic design of the base cupboard with large round edges.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Storage space in the base of the appliance accepts GN1/1 containers.
- Internal frame for heavy duty sturdiness in stainless steel.

## **Optional Accessories**

•	Stainless steel side panel, 900x700mm, freestanding	PNC	912512	
•	Stainless steel front kicking strip, 800mm width	PNC	912634	
•	Stainless steel side kicking strip left and right, freestanding, 900mm width	PNC	912657	
•	Stainless steel side kicking strips left and right, against the wall, 900mm width	PNC	912660	
•	Stainless steel side kicking strip left and right, back-to-back, 1810mm width	PNC	912663	
•	Stainless steel plinth, against wall, 800mm width	PNC	912939	
•	Stainless steel plinth, freestanding, 800mm width	PNC	912958	
•	Stainless steel panel, 900x700mm, against wall, left side	PNC	913101	
•	Stainless steel panel, 900x700mm, against wall, right side	PNC	913105	
•	Back panel, 800x450mm, for bases one-side operated	PNC	913167	
•	Stainless steel side panel, left, H=700	PNC	913222	
•	Stainless steel side panel, right, H=700	PNC	913223	

#### APPROVAL:








<ul> <li>Perforated shelf for warming cabinets and cupboard bases (one-side operated TL80-85-90 and two-side operated for TL80)</li> </ul>	PNC 913234	
<ul> <li>Side reinforced panel only in combination with side shelf, for freestanding units</li> </ul>	PNC 913260	
Side reinforced panel only in combination with side shelf, for against the wall installations, left	PNC 913267	
<ul> <li>Side reinforced panel only in combination with side shelf, for against the wall installations, right</li> </ul>	PNC 913269	
<ul> <li>Side reinforced panel only in combination with side shelf, for back- to-back installations, left</li> </ul>	PNC 913275	
<ul> <li>Side reinforced panel only in combination with side shelf, for back- to-back installation, right</li> </ul>	PNC 913276	
<ul> <li>Shelf fixation for TL80-85-90 one-side operated, TL80 two-side operated</li> </ul>	PNC 913281	
Stainless steel dividing panel, 900x700mm, (it should only be used between Electrolux Professional thermaline Modular 90 and thermaline C90)	PNC 913672	
• Stainless steel side panel, 900x700mm, flush-fitting (it should only be used against the wall, against a niche and in between Electrolux Professional thermaline and ProThermetic appliances and external appliances provided that these have at least the same dimensions)	PNC 913688	



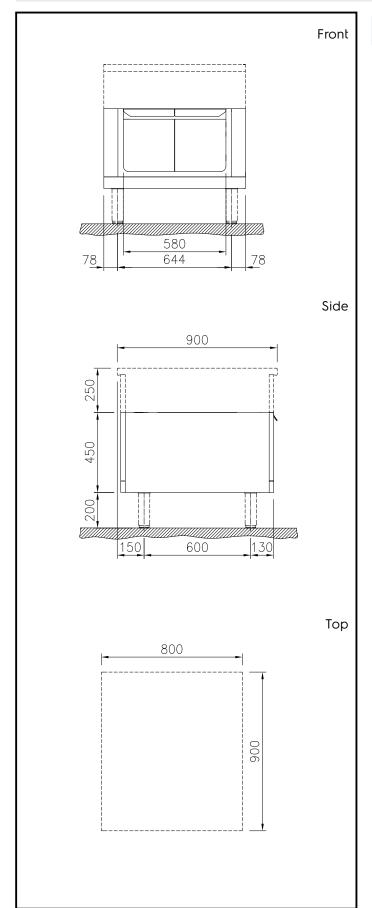

## **Key Information:**

External dimensions, Width:

589186 (MC1FCAHOOO) 800 mm External dimensions, Depth: 900 mm External dimensions, Height: 450 mm

**Cupboard Cavity Dimensions** (width):

580 mm

**Cupboard Cavity Dimensions** (height):

**Cupboard Cavity Dimensions** 

(depth): Net weight: 30 kg

715 mm

330 mm