

Modular Cooking Range Line thermaline 90 - 1000 mm Passthrough open base, 2 Sides (H2) - H=450

ITEM #	
MODEL #	
NAME #	
SIS #	
AIA#	



589190 (MC2ACCJOOO)

Passthrough Open Base, two-side operated - H2

Short Form Specification

Item No.

1000 mm wide open passthrough base compartment to store pots, pans, sheet pans, etc. with hygienic design and round edges. Unit constructed according to DIN 18860_2 with 70 mm recessed plinth. Internal frame for heavy duty sturdiness in stainless steel. Flat surface construction, easily cleanable. IPX5 water resistant certification.

Configuration: Two-side operated freestanding base, hygienic class H2.

Main Features

- Open base compartment for storage of pots, pans, sheet pans, etc.
- IPX5 water resistance certification.
- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Unit constructed according to DIN 18860_2 with 70 mm recessed plinth.

Construction


- Hygienic design of the open base compartment with large round edges.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in stainless steel.

APPROVAL:






Modular Cooking Range Line thermaline 90 - 1000 mm Passthrough open base, 2 Sides (H2) - H=450

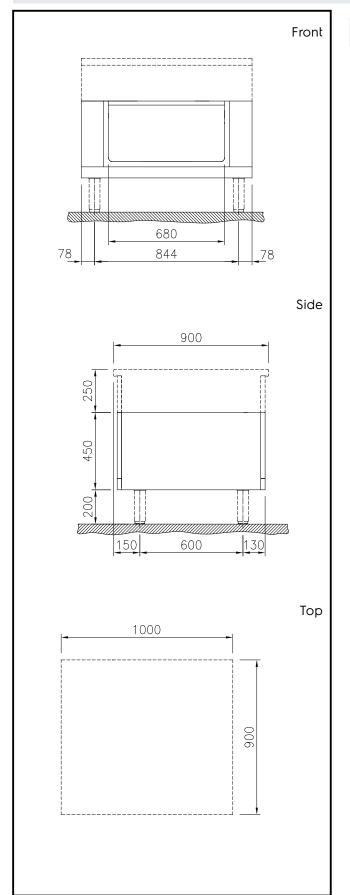

Key Information:

External dimensions, Width: 589190 (MC2ACCJOOO) 1000 mm External dimensions, Depth: 900 mm External dimensions, Height: 450 mm **Cupboard Cavity Dimensions** (width): 680 mm **Cupboard Cavity Dimensions** 330 mm (height): **Cupboard Cavity Dimensions** 860 mm (depth): Net weight: 24 kg







_										•
	nI	110	n	al	Δ	c	~മ	CC	α r	ies
\sim	\sim		,,,	чı	$\overline{}$	\sim		J	\mathbf{v}	100

 Stainless steel side panel, 900x700mm, freestanding 	PNC 912512	
• Stainless steel front kicking strip, 1000mm width	PNC 912636	
 Stainless steel side kicking strip left and right, freestanding, 900mm width 	PNC 912657	
 Stainless steel plinth, freestanding, 1000mm width 	PNC 912960	
 Perforated shelf for warming cabinets and cupboard bases (two-side operated for TL90) 	PNC 913238	
 Side reinforced panel only in combination with side shelf, for freestanding units 	PNC 913260	
 Shelf fixation for TL90 two-side operated 	PNC 913284	
 Stainless steel dividing panel, 900x700mm, (it should only be used between Electrolux Professional thermaline Modular 90 and thermaline C90) 	PNC 913672	
Stainless steel side panel, 900x700mm, flush-fitting (it should only be used against the wall, against a niche and in between Electrolux Professional thermaline and ProThermetic appliances and external appliances - provided that these have at least the same dimensions)	PNC 913688	

