

Modular Cooking Range Line thermaline 90 - 1200 mm Passthrough open base, 2 Sides (H2) - H=450

ITEM #		
MODEL #		
NAME #		
SIS #		
AIA#		



589191 (MC2ACCKOOO)

Passthrough Open Base, two-side operated - H2

# **Short Form Specification**

### Item No.

1200 mm wide open passthrough base compartment to store pots, pans, sheet pans, etc. with hygienic design and round edges. Unit constructed according to DIN 18860\_2 with 70 mm recessed plinth. Internal frame for heavy duty sturdiness in stainless steel. Flat surface construction, easily cleanable. IPX5 water resistant certification.

Configuration: Two-side operated freestanding base, hygienic class H2.

### **Main Features**

- Open base compartment for storage of pots, pans, sheet pans, etc.
- IPX5 water resistance certification.
- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Unit constructed according to DIN 18860\_2 with 70 mm recessed plinth.

#### Construction


- Hygienic design of the open base compartment with large round edges.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in stainless steel.

APPROVAL:






# Modular Cooking Range Line thermaline 90 - 1200 mm Passthrough open base, 2 Sides (H2) - H=450

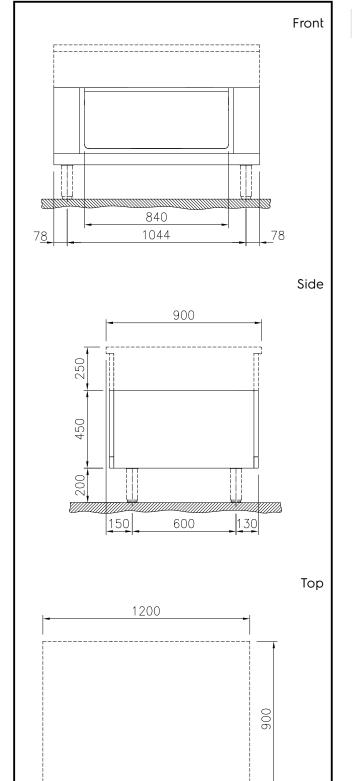

## **Key Information:**

External dimensions, Width: 589191 (MC2ACCKOOO) 1200 mm External dimensions, Depth: 900 mm External dimensions, Height: 450 mm **Cupboard Cavity Dimensions** (width): 840 mm **Cupboard Cavity Dimensions** 330 mm (height): **Cupboard Cavity Dimensions** (depth): 860 mm Net weight: 26 kg







O	ption	al Acc	cessories	
_	P 11 O 1 1	<b></b>		•

<ul> <li>Stainless steel side panel, 900x700mm, freestanding</li> </ul>	PNC 912512	
• Stainless steel front kicking strip, 1200mm width	PNC 912638	
<ul> <li>Stainless steel side kicking strip left and right, freestanding, 900mm width</li> </ul>	PNC 912657	
<ul> <li>Stainless steel plinth, freestanding, 1200mm width</li> </ul>	PNC 912962	
<ul> <li>Perforated shelf for warming cabinets and cupboard bases (two-side operated for TL90)</li> </ul>	PNC 913240	
<ul> <li>Side reinforced panel only in combination with side shelf, for freestanding units</li> </ul>	PNC 913260	
<ul> <li>Shelf fixation for TL90 two-side operated</li> </ul>	PNC 913280	
<ul> <li>Stainless steel dividing panel, 900x700mm, (it should only be used between Electrolux Professional thermaline Modular 90 and thermaline C90)</li> </ul>	PNC 913672	
Stainless steel side panel, 900x700mm, flush-fitting (it should only be used against the wall, against a niche and in between Electrolux Professional thermaline and ProThermetic appliances and external appliances - provided that these have at least the same dimensions)	PNC 913688	

