



**Electrolux**  
PROFESSIONAL

**Modular Cooking Range Line  
thermaline 90 - 1500 mm Passthrough  
open base, 2 Sides (H2) - H=450**

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



589192 (MC2ACCLOOO)

Passthrough Open Base,  
two-side operated - H2

### Short Form Specification

**Item No.** \_\_\_\_\_

1500 mm wide open passthrough base compartment to store pots, pans, sheet pans, etc. with hygienic design and round edges. Internal frame for heavy duty sturdiness in stainless steel.

Flat surface construction, easily cleanable.

IPX5 water resistant certification.

Configuration: Two-side operated freestanding base, hygienic class H2.

### Main Features

- Open base compartment for storage of pots, pans, sheet pans, etc.
- All major components may be easily accessed from the front.
- Unit to be placed below modular top appliances to store pots, pans, sheet pans, etc.

### Construction

- Hygienic design of the open base compartment with large round edges.
- IPX5 water resistance certification.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in stainless steel.

APPROVAL: \_\_\_\_\_




Experience the Excellence  
[www.electroluxprofessional.com](http://www.electroluxprofessional.com)




**Electrolux**  
PROFESSIONAL

## Modular Cooking Range Line thermaline 90 - 1500 mm Passthrough open base, 2 Sides (H2) - H=450


Front

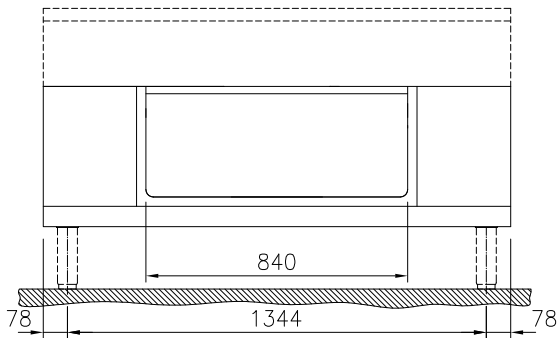

Side

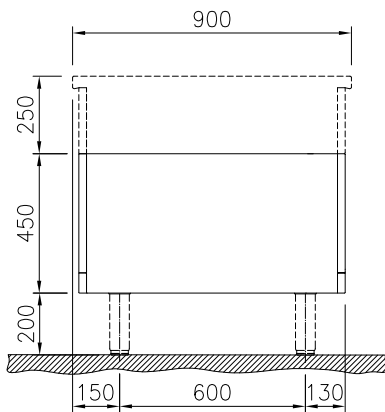

Top

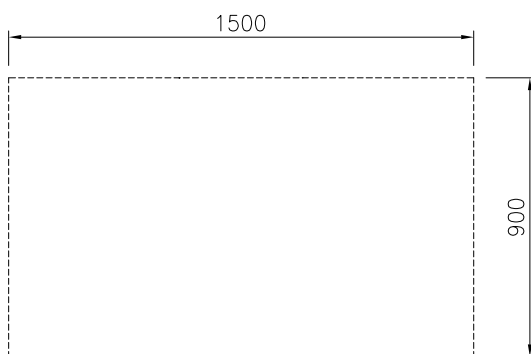

### Key Information:

|                                      |         |
|--------------------------------------|---------|
| External dimensions, Width:          |         |
| 589192 (MC2ACCLOOO)                  | 1500 mm |
| External dimensions, Depth:          | 900 mm  |
| External dimensions, Height:         | 450 mm  |
| Cupboard Cavity Dimensions (width):  | 840 mm  |
| Cupboard Cavity Dimensions (height): | 330 mm  |
| Cupboard Cavity Dimensions (depth):  | 860 mm  |
| Net weight:                          | 29 kg   |



Modular Cooking Range Line  
thermaline 90 - 1500 mm Passthrough open base, 2 Sides (H2) - H=450

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2025.09.07

### Optional Accessories

- Stainless steel side panel, 900x700mm, freestanding PNC 912512 ☐
- Stainless steel front kicking strip, 1500mm width PNC 912641 ☐
- Stainless steel side kicking strip left and right, freestanding, 900mm width PNC 912657 ☐
- Stainless steel plinth, freestanding, 1500mm width PNC 912965 ☐
- Perforated shelf for warming cabinets and cupboard bases (two-side operated for TL90) PNC 913240 ☐
- Side reinforced panel only in combination with side shelf, for freestanding units PNC 913260 ☐
- Shelf fixation for TL90 two-side operated PNC 913280 ☐
- Stainless steel dividing panel, 900x700mm, (it should only be used between Electrolux Professional thermaline Modular 90 and thermaline C90) PNC 913672 ☐
- Stainless steel side panel, 900x700mm, flush-fitting (it should only be used against the wall, against a niche and in between Electrolux Professional thermaline and ProThermetic appliances and external appliances - provided that these have at least the same dimensions) PNC 913688 ☐