

**Modular Cooking Range Line**  
**thermaline 90 - 40 lt Well Freestanding**  
**Gas Pasta Cooker, 1 Side with**  
**Backsplash, H=700**

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



**589295 (MCKFEBDDPO)**

40lt gas Pasta Cooker, one-side operated

### Short Form Specification

**Item No.** \_\_\_\_\_

Unit constructed according to DIN 18860\_2 with 20 mm drop nose top and 70 mm recessed plinth. Internal frame for heavy duty sturdiness in stainless steel. 2 mm top in 1.4301 (AISI 304). Flat surface construction, easily cleanable. THERMODUL connection system enables seamless worktop when units are connected and avoids soil penetrating. Appliance which can also be used to cook noodles of every kind, rice, dumplings and vegetables. Water basin in 1.4435 (AISI 316L) stainless steel, with automatic constant water level re-fill and water temperature regulation via sensors. Integrated drip tray to drain baskets. Compatible with automatic basket lifting system to facilitate lifting operations. Safety systems and automatic low-water level shut-off protect against overheating. All-round basin raised edges to protect against soil infiltration. Standby function saves energy and quickly recovers maximum power. Metal knobs with embedded hygienic silicon "soft" grip enable easier handling and cleaning. IPX5 water resistant certification.

Configuration: Freestanding, One-side operated with backsplash.

### Main Features

- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Metal-covered knobs with embedded hygienic "soft-touch" grip for easier handling and cleaning. The special design of the controls prevents infiltration of liquids or soil into vital components.
- Provided with integrated drip zone on which baskets can be placed for draining purposes.
- In addition to cooking pasta, the appliance can be used for noodles of every kind, rice, dumplings and vegetables.
- Easy to clean basin with rounded corners.
- Raised edge all around the well to protect from infiltration of dirt from worktop.
- Safety systems protect against overtemperature and can be manually reset.
- Safety thermostat and thermostatic control.
- Electrical ignition powered by battery with thermocouple for added safety.

### Construction

- 2 mm top in 1.4301 (AISI 304).
- Unit constructed according to DIN 18860\_2 with 20 mm drop nose top and 70 mm recessed plinth.
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Water basin in 1.4435 (AISI 316L) stainless steel is seamlessly welded into the top of the appliance.
- High efficiency burners in AISI 430 stainless steel with flame failure device.
- IPx4 water protection.
- Internal frame for heavy duty sturdiness in stainless steel.

### Sustainability



- **EnergyControl**: unique feature for fine power adjustment to control boiling level and optimize energy consumption.

### Optional Accessories

- Connecting rail kit for appliances with backsplash, 900mm PNC 912499 ☐
- Portioning shelf, 400mm width PNC 912522 ☐
- Portioning shelf, 400mm width PNC 912552 ☐
- Folding shelf, 300x900mm PNC 912581 ☐

**APPROVAL:** \_\_\_\_\_


|                                                                                                                                                                                                                                                                                 |            |                          |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|--------------------------|
| • Folding shelf, 400x900mm                                                                                                                                                                                                                                                      | PNC 912582 | <input type="checkbox"/> |
| • Fixed side shelf, 200x900mm                                                                                                                                                                                                                                                   | PNC 912589 | <input type="checkbox"/> |
| • Fixed side shelf, 300x900mm                                                                                                                                                                                                                                                   | PNC 912590 | <input type="checkbox"/> |
| • Fixed side shelf, 400x900mm                                                                                                                                                                                                                                                   | PNC 912591 | <input type="checkbox"/> |
| • Stainless steel front kicking strip, 400mm width                                                                                                                                                                                                                              | PNC 912630 | <input type="checkbox"/> |
| • Stainless steel side kicking strips left and right, against the wall, 900mm width                                                                                                                                                                                             | PNC 912660 | <input type="checkbox"/> |
| • Stainless steel side kicking strip left and right, back-to-back, 1810mm width                                                                                                                                                                                                 | PNC 912663 | <input type="checkbox"/> |
| • Stainless steel plinth, against wall, 400mm width                                                                                                                                                                                                                             | PNC 912935 | <input type="checkbox"/> |
| • Connecting rail kit for appliances with backsplash: modular 90 (on the left) to ProThermatic tilting (on the right), ProThermatic stationary (on the left) to ProThermatic tilting (on the right)                                                                             | PNC 912981 | <input type="checkbox"/> |
| • Connecting rail kit for appliances with backsplash: modular 90 (on the right) to ProThermatic tilting (on the left), ProThermatic stationary (on the right) to ProThermatic tilting (on the left)                                                                             | PNC 912982 | <input type="checkbox"/> |
| • Back panel, 400x700mm, for units with backsplash                                                                                                                                                                                                                              | PNC 913009 | <input type="checkbox"/> |
| • Endrail kit, flush-fitting, with backsplash, left                                                                                                                                                                                                                             | PNC 913117 | <input type="checkbox"/> |
| • Endrail kit, flush-fitting, with backsplash, right                                                                                                                                                                                                                            | PNC 913118 | <input type="checkbox"/> |
| • Support frame for 6 round baskets                                                                                                                                                                                                                                             | PNC 913133 | <input type="checkbox"/> |
| • Lid for 40lt pasta cooker                                                                                                                                                                                                                                                     | PNC 913149 | <input type="checkbox"/> |
| • Endrail kit (12.5mm) for thermaline 90 units with backsplash, left                                                                                                                                                                                                            | PNC 913208 | <input type="checkbox"/> |
| • Endrail kit (12.5mm) for thermaline 90 units with backsplash, right                                                                                                                                                                                                           | PNC 913209 | <input type="checkbox"/> |
| • U-clamping rail for back-to-back installations with backsplash (to be ordered as S-code)                                                                                                                                                                                      | PNC 913226 | <input type="checkbox"/> |
| • Side reinforced panel only in combination with side shelf, for against the wall installations, left                                                                                                                                                                           | PNC 913267 | <input type="checkbox"/> |
| • Side reinforced panel only in combination with side shelf, for against the wall installations, right                                                                                                                                                                          | PNC 913269 | <input type="checkbox"/> |
| • Additional wall mounting fixation - US                                                                                                                                                                                                                                        | PNC 913640 | <input type="checkbox"/> |
| • Stainless steel lower side panel (12,5mm), 900x300mm, left side, wall mounted                                                                                                                                                                                                 | PNC 913643 | <input type="checkbox"/> |
| • Stainless steel lower side panel (12,5mm), 900x300mm, right side, wall mounted                                                                                                                                                                                                | PNC 913644 | <input type="checkbox"/> |
| • Wall mounting kit for units - TL85/90 - Factory Fitted (H=700)                                                                                                                                                                                                                | PNC 913655 | <input type="checkbox"/> |
| • Stainless steel dividing panel, 900x700mm, (it should only be used between Electrolux Professional thermaline Modular 90 and thermaline C90)                                                                                                                                  | PNC 913672 | <input type="checkbox"/> |
| • Stainless steel side panel, 900x700mm, flush-fitting (it should only be used against the wall, against a niche and in between Electrolux Professional thermaline and ProThermatic appliances and external appliances - provided that these have at least the same dimensions) | PNC 913688 | <input type="checkbox"/> |




**Electrolux**  
PROFESSIONAL

**Modular Cooking Range Line**  
**thermaline 90 - 40 lt Well Freestanding Gas**  
**Pasta Cooker, 1 Side with Backsplash, H=700**

Front




Side

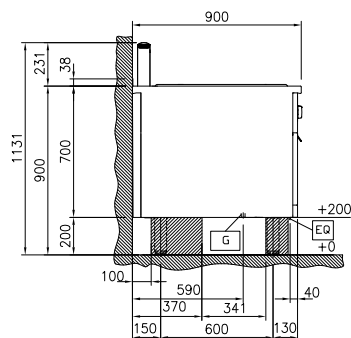

D = Drain  
EQ = Equipotential screw  
G = Gas connection  
WI = Water inlet

Top



**Gas**

Gas Power: 16.5 kW  
Gas Inlet: 3/4"

**Key Information:**

Number of wells: 1  
Usable well dimensions (width): 300 mm  
Usable well dimensions (height): 260 mm  
Usable well dimensions (depth): 520 mm  
Well capacity: 32 lt MIN; 40 lt MAX  
Well Capacity (MAX): 40 lt MAX  
External dimensions, Width: 400 mm  
External dimensions, Depth: 900 mm  
External dimensions, Height: 700 mm  
Net weight: 73 kg  
Configuration: On Base; One-Side Operated



Modular Cooking Range Line  
thermaline 90 - 40 lt Well Freestanding Gas Pasta Cooker, 1 Side with  
Backsplash, H=700  
The company reserves the right to make modifications to the products  
without prior notice. All information correct at time of printing.

2026.07.10