

Modular Cooking Range Line thermaline 90 - 900 mm Open base, 1 Side (H2) - H=550

ITEM #	
MODEL #	
NAME #	
SIS #	
AIA#	



589311 (MC1ADAIOOO)

Open Base, one-side operated - H2

Short Form Specification

Item No.

900 mm wide open base compartment to store pots, pans, sheet pans, etc. with hygienic design and round edges. Internal frame for heavy duty sturdiness in stainless steel. Flat surface construction, easily cleanable.

IPX5 water resistant certification.

Configuration: One-side operated freestanding base, hygienic class H2.

Main Features

- Open base compartment for storage of pots, pans, sheet pans, etc.
- All major components may be easily accessed from the front.
- Unit to be placed below modular top appliances to store pots, pans, sheet pans, etc.

Construction


- Hygienic design of the open base compartment with large round edges.
- IPX5 water resistance certification.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in stainless steel.

APPROVAL:





Modular Cooking Range Line thermaline 90 - 900 mm Open base, 1 Side (H2) - H=550

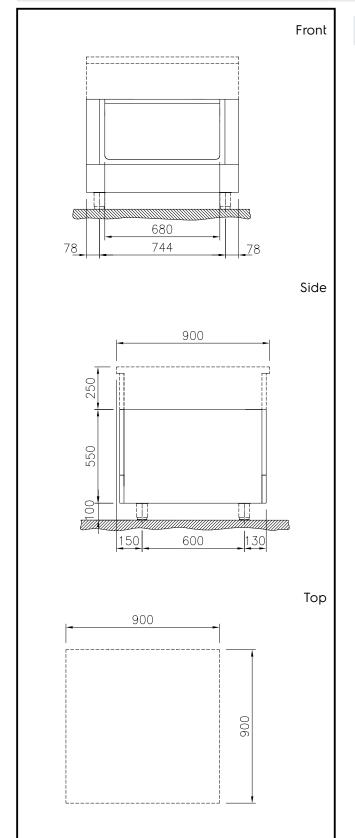

Key Information:

External dimensions, Width: 589311 (MC1ADAIOOO) 900 mm External dimensions, Depth: 900 mm External dimensions, Height: 550 mm **Cupboard Cavity Dimensions** (width): 680 mm **Cupboard Cavity Dimensions** 330 mm (height): **Cupboard Cavity Dimensions** 740 mm (depth): Net weight: 25 kg





Modular Cooking Range Line thermaline 90 - 900 mm Open base, 1 Side (H2) - H=550

Optional Accessories		
 Stainless steel side panel, 900x800mm, freestanding 	PNC 912511	
 Stainless steel front kicking strip, 900mm width 	PNC 912599	
 Stainless steel side kicking strips left and right, freestanding, 900mm width 	PNC 912621	
 Stainless steel side kicking strips left and right, against the wall, 900mm width 	PNC 912624	
 Stainless steel side kicking strips left and right, back-to-back, 1810mm width 	PNC 912627	
Stainless steel plinth, against wall, 900mm width	PNC 912902	
• Stainless steel plinth, freestanding, 900mm width	PNC 912921	
 Stainless steel panel, 900x800mm, against wall, left side 	PNC 913102	
 Stainless steel panel, 900x800mm, against wall, right side 	PNC 913106	
 Back panel, 900x450mm, for bases one-side operated 	PNC 913183	
• Stainless steel side panel, left, H=800, flush	PNC 913224	
• Stainless steel side panel, left, H=800, flush	PNC 913225	
 Perforated shelf for warming cabinets and cupboard bases (one-side operated TL80-85-90 and two-side operated for TL80) 	PNC 913235	
 Side reinforced panel only in combination with side shelf, for freestanding units 	PNC 913259	
 Side reinforced panel only in combination with side shelf, for against the wall installations, left 	PNC 913268	
 Side reinforced panel only in combination with side shelf, for against the wall installations, right 	PNC 913270	
 Side reinforced panel only in combination with side shelf, for back-to-back installations, left 	PNC 913277	
 Side reinforced panel only in combination with side shelf, for back-to-back installation, right 	PNC 913278	
 Shelf fixation for TL80-85-90 one- side operated, TL80 two-side operated 	PNC 913283	
Stainless steel dividing panel, 900x800mm, (it should only be used between Electrolux Professional thermaline Modular.	PNC 913673	

 Stainless steel side panel, 900x800mm, flush-fitting (it should only be used against the wall, against a niche and in between Electrolux Professional thermaline and ProThermetic appliances and external appliances – provided that these have at least the same dimensions)



Professional thermaline Modular

90 and thermaline C90)