

Modular Cooking Range Line thermaline 90 - 400 mm Cupboard base with 1 door, GN conform, 1 Side (H2) -H=550



589318 (MC1DDADOOO)

Cupboard Base, with 1 door, one-side operated, GN - H2

Short Form Specification

Item No.

400 mm wide cupboard base with 1 door with hygienic design and round edges. Internal frame for heavy duty sturdiness in stainless steel. Flat surface construction, easily cleanable. Cupboard storage space accepts GN 1/1 containers.

IPX5 water resistant certification.

Configuration: One-side operated freestanding base, hygienic class H2.

ITEM #	
MODEL #	
NAME #	
<u>SIS #</u>	
AIA #	

Main Features

- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Unit constructed according to DIN 18860_2 with 70 mm recessed plinth.
- Cupboard compartment for storage of pots, pans, sheet pans etc.


Construction

- IPX5 water resistance certification.
- Hygienic design of the base cupboard with large round edges.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Storage space in the base of the appliance accepts GN1/1 containers.
- Internal frame for heavy duty sturdiness in stainless steel.

APPROVAL:

Electrolux PROFESSIONAL

Modular Cooking Range Line thermaline 90 - 400 mm Cupboard base with 1 door, GN conform, 1 Side (H2) - H=550

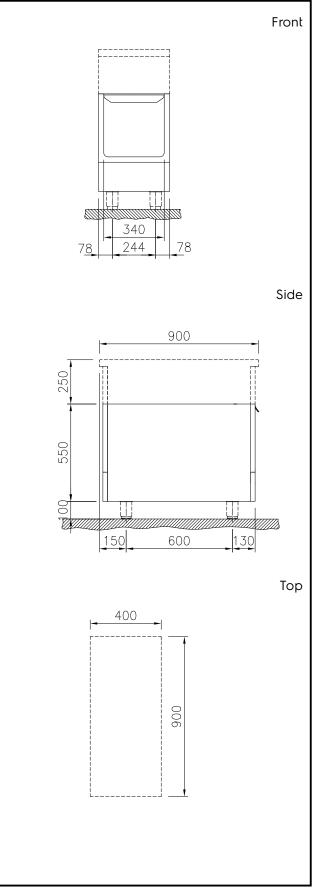

CE

DNV-GL

Key Information:

External dimensions, Width:	
589318 (MC1DDADOOO)	400 mm
External dimensions, Depth:	900 mm
External dimensions, Height:	550 mm
Cupboard Cavity Dimensions (width):	340 mm
Cupboard Cavity Dimensions (height):	330 mm
Cupboard Cavity Dimensions (depth):	715 mm
Net weight:	24 kg

Modular Cooking Range Line thermaline 90 - 400 mm Cupboard base with 1 door, GN conform, 1 Side (H2) - H=550 The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.



Modular Cooking Range Line thermaline 90 - 400 mm Cupboard base with 1 door, GN conform, 1 Side (H2) - H=550

Optional Accessories

Optional Accessories		
 Stainless steel side panel, 900x800mm, freestanding 	PNC 912511	
• Stainless steel front kicking strip, 400mm width	PNC 912594	
 Stainless steel side kicking strips left and right, freestanding, 900mm width 	PNC 912621	
 Stainless steel side kicking strips left and right, against the wall, 900mm width 	PNC 912624	
 Stainless steel side kicking strips left and right, back-to-back, 1810mm width 	PNC 912627	
 Stainless steel plinth, against wall, 400mm width 	PNC 912897	
 Stainless steel plinth, freestanding, 400mm width 	PNC 912916	
 Stainless steel panel, 900x800mm, against wall, left side 	PNC 913102	
 Stainless steel panel, 900x800mm, against wall, right side 	PNC 913106	
 Back panel, 400x550mm, for bases one-side operated 	PNC 913178	
 Stainless steel side panel, left, H=800, flush 	PNC 913224	
 Stainless steel side panel, left, H=800, flush 	PNC 913225	
 Perforated shelf for warming cabinets and cupboard bases (one-side operated TL80-85-90 and two-side operated for TL80) 	PNC 913233	
 Side reinforced panel only in combination with side shelf, for freestanding units 	PNC 913259	
 Side reinforced panel only in combination with side shelf, for against the wall installations, left 	PNC 913268	
• Side reinforced panel only in combination with side shelf, for against the wall installations, right	PNC 913270	
 Side reinforced panel only in combination with side shelf, for back-to-back installations, left 	PNC 913277	
 Side reinforced panel only in combination with side shelf, for back-to-back installation, right 	PNC 913278	
 Shelf fixation for TL80-85-90 one- side operated, TL80 two-side operated 	PNC 913279	
 Stainless steel dividing panel, 900x800mm, (it should only be used between Electrolux Professional thermaline Modular 90 and thermaline C90) 	PNC 913673	

 Stainless steel side panel, 900x800mm, flush-fitting (it should only be used against the wall, against a niche and in between Electrolux Professional thermaline and ProThermetic appliances and external appliances - provided that these have at least the same dimensions)