

Modular Cooking Range Line thermaline 90 - 500 mm Cupboard base with 1 door, GN conform, 1 Side (H2) -H=550

ITEM #		
MODEL #		
MODEL #		
NAME #		
SIS #		
AIA #		



589319 (MCIDDAEOOO)

Cupboard Base, with 1 door, one-side operated, GN - H2

Short Form Specification

Item No.

500 mm wide cupboard base with 1 door with hygienic design and round edges. Internal frame for heavy duty sturdiness in stainless steel. Flat surface construction, easily cleanable. Cupboard storage space accepts GN 1/1 containers.

IPX5 water resistant certification.

Configuration: One-side operated freestanding base, hygienic class H2.

Main Features

- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Unit constructed according to DIN 18860_2 with 70 mm recessed plinth.
- Cupboard compartment for storage of pots, pans, sheet pans etc.


Construction

- IPX5 water resistance certification.
- Hygienic design of the base cupboard with large round edges.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Storage space in the base of the appliance accepts GN1/1 containers.
- Internal frame for heavy duty sturdiness in stainless steel.

APPROVAL:





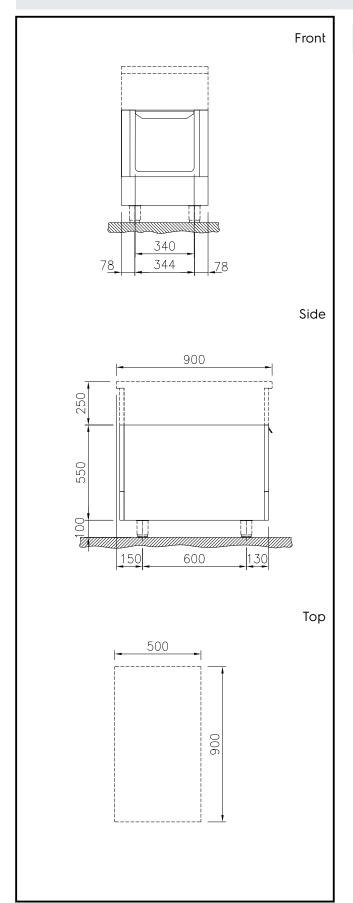

Key Information:

External dimensions, Width: 589319 (MC1DDAEOOO) 500 mm External dimensions, Depth: 900 mm External dimensions, Height: 550 mm **Cupboard Cavity Dimensions** (width): 340 mm **Cupboard Cavity Dimensions** 330 mm

(height): **Cupboard Cavity Dimensions**

(depth): 715 mm Net weight: 25 kg





Modular Cooking Range Line thermaline 90 - 500 mm Cupboard base with 1 door, GN conform, 1 Side (H2) - H=550

			Stainless steel side panel,	PNC 913689	
Optional Accessories			900x800mm, flush-fitting (it should only be used against the wall,		
 Stainless steel side panel, 900x800mm, freestanding 	PNC 912511		against a niche and in between Electrolux Professional thermaline		
 Stainless steel front kicking strip, 500mm width 	PNC 912595		and ProThermetic appliances and external appliances - provided that		
 Stainless steel side kicking strips left and right, freestanding, 900mm width 	PNC 912621		these have at least the same dimensions)		
 Stainless steel side kicking strips left and right, against the wall, 900mm width 	PNC 912624				
 Stainless steel side kicking strips left and right, back-to-back, 1810mm width 	PNC 912627				
 Stainless steel plinth, against wall, 500mm width 	PNC 912898				
 Stainless steel plinth, freestanding, 500mm width 	PNC 912917				
 Stainless steel panel, 900x800mm, against wall, left side 	PNC 913102				
 Stainless steel panel, 900x800mm, against wall, right side 	PNC 913106				
 Back panel, 500x550mm, for bases one-side operated 	PNC 913179				
• Stainless steel side panel, left, H=800, flush	PNC 913224				
• Stainless steel side panel, left, H=800, flush	PNC 913225				
 Perforated shelf for warming cabinets and cupboard bases (one-side operated TL80-85-90 and two-side operated for TL80) 	PNC 913233				
 Side reinforced panel only in combination with side shelf, for freestanding units 	PNC 913259				
 Side reinforced panel only in combination with side shelf, for against the wall installations, left 	PNC 913268				
 Side reinforced panel only in combination with side shelf, for against the wall installations, right 	PNC 913270				
 Side reinforced panel only in combination with side shelf, for back-to-back installations, left 	PNC 913277				
 Side reinforced panel only in combination with side shelf, for back-to-back installation, right 	PNC 913278				
 Shelf fixation for TL80-85-90 one- side operated, TL80 two-side operated 	PNC 913279				
 Stainless steel dividing panel, 900x800mm, (it should only be used between Electrolux Professional thermaline Modular 90 and thermaline C90) 	PNC 913673				

