

Modular Cooking Range Line thermaline 90 - 800 mm Cupboard base with 2 doors, GN conform, 1 Side (H2) -H=550

ITEM #
MODEL #
MODEL #
NAME #
SIS #
AIA#



589322 (MC1FDAHOOO)

Cupboard Base, with 2 doors, one-side operated, GN - H2

Short Form Specification

Item No.

800 mm wide cupboard base with 2 doors with hygienic design and round edges. Internal frame for heavy duty sturdiness in stainless steel. Flat surface construction, easily cleanable. Cupboard storage space accepts GN 1/1 containers.

IPX5 water resistant certification.

Configuration: One-side operated freestanding base, hygienic class H2.

Main Features

- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Unit constructed according to DIN 18860_2 with 70 mm recessed plinth.
- Cupboard compartment for storage of pots, pans, sheet pans etc.


Construction

- IPX5 water resistance certification.
- Hygienic design of the base cupboard with large round edges.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Storage space in the base of the appliance accepts GN1/1 containers.
- Internal frame for heavy duty sturdiness in stainless steel.

APPROVAL:





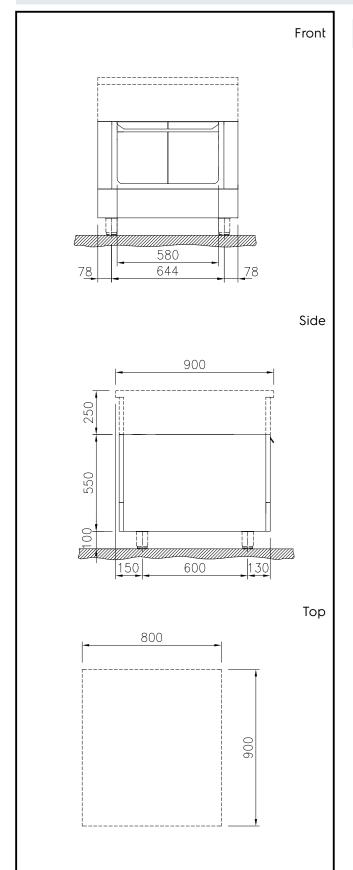

Key Information:

External dimensions, Width:	
589322 (MC1FDAHOOO)	800 mm
External dimensions, Depth:	900 mm
External dimensions, Height:	550 mm
Cupboard Cavity Dimensions (width):	580 mm
Cupboard Cavity Dimensions (height):	330 mm
Cupboard Cavity Dimensions (depth): Net weight:	715 mm 32 kg





Modular Cooking Range Line thermaline 90 - 800 mm Cupboard base with 2 doors, GN conform, 1 Side (H2) - H=550

		Stainless steel side panel,	PNC 913689	
Optional Accessories	DVIC 010511	900x800mm, flush-fitting (it should		
 Stainless steel side panel, 900x800mm, freestanding 	PNC 912511	only be used against the wall, against a niche and in between Electrolux Professional thermaline		
 Stainless steel front kicking strip, 800mm width 	PNC 912598	and ProThermetic appliances and external appliances - provided that		
 Stainless steel side kicking strips left and right, freestanding, 900mm width 	PNC 912621	these have at least the same dimensions)		
 Stainless steel side kicking strips left and right, against the wall, 900mm width 	PNC 912624			
 Stainless steel side kicking strips left and right, back-to-back, 1810mm width 	PNC 912627			
 Stainless steel plinth, against wall, 800mm width 	PNC 912901			
 Stainless steel plinth, freestanding, 800mm width 	PNC 912920			
 Stainless steel panel, 900x800mm, against wall, left side 	PNC 913102			
 Stainless steel panel, 900x800mm, against wall, right side 	PNC 913106			
Back panel, 800x550mm, for bases one-side operated	PNC 913182			
• Stainless steel side panel, left, H=800, flush	PNC 913224			
• Stainless steel side panel, left, H=800, flush	PNC 913225			
 Perforated shelf for warming cabinets and cupboard bases (one-side operated TL80-85-90 and two-side operated for TL80) 	PNC 913234			
 Side reinforced panel only in combination with side shelf, for freestanding units 	PNC 913259			
Side reinforced panel only in combination with side shelf, for against the wall installations, left	PNC 913268			
 Side reinforced panel only in combination with side shelf, for against the wall installations, right 	PNC 913270			
 Side reinforced panel only in combination with side shelf, for back-to-back installations, left 	PNC 913277			
 Side reinforced panel only in combination with side shelf, for back-to-back installation, right 	PNC 913278			
 Shelf fixation for TL80-85-90 one- side operated, TL80 two-side operated 	PNC 913281			
 Stainless steel dividing panel, 900x800mm, (it should only be used between Electrolux Professional thermaline Modular 90 and thermaline C90) 	PNC 913673			

