

**Modular Cooking Range Line  
 thermaline 90 - 4 Zone Full Surface  
 Induction Top on Passthrough Base, 2  
 Sides, H=800**

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



**589369 (MCJDFCJ2AO)**

Full Surface Induction Top  
 on passthrough Base, 4  
 zones, two-side operated -  
 H2

### Short Form Specification

**Item No.** \_\_\_\_\_

Unit constructed according to DIN 18860\_2 with 20 mm drop nose top and 70 mm recessed plinth. Internal frame for heavy duty sturdiness in stainless steel. 2 mm top in 1.4301 (AISI 304). Flat surface construction, easily cleanable. THERMODUL connection system enables seamless worktop when units are connected and avoids soil penetrating. Large multi-coil glass ceramic surface without any "dead" spots allows for quick and easy cleaning. Features 9 power levels with fast deployment to full heating power and very low heat dissipation to the kitchen. Overheat protection switches off the supply in case of overheating. Metal knobs with embedded hygienic silicon "soft" grip enable easier handling and cleaning. IPX5 water resistance certification.

Configuration: Freestanding, two-side operated, on passthrough base, hygienic class H2.

### Main Features

- Overheat protection: the temperature sensor switches off the supply in case of overheating.
- Pans can easily be moved from one area to another without lifting.
- The smooth glass-ceramic surface can be quickly and easily cleaned, thus providing maximum hygiene.
- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Metal knobs with embedded hygienic "soft-touch" grip for easier handling and cleaning. The special design of the controls prevents infiltration of liquids or soil into vital components.
- Large visible digital display manufactured in tempered glass to resist heat and chemicals, showing temperatures or power settings. The display also shows on/off status of the appliance and on/off status of the heating elements.
- 9 power levels.
- Almost the entire surface of the ceramic plate can be used without "dead" spots.
- Fast deployment with full heating power immediately.
- Low heat dissipation to the kitchen.
- The large surface multi-coil induction top offers a substantial increase in pan and pot capacity thanks to the seamless transition between individual heating zones, ideal for à la carte operation.
- Handles are ergonomically designed with silicon "soft" grip for easy handling and cleaning.

### Construction

- Control light for each zone.
- 2 mm top in 1.4301 (AISI 304).
- Unit constructed according to DIN 18860\_2 with 20 mm drop nose top and 70 mm recessed plinth.
- IPX5 water resistance certification.
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in stainless steel.

### Sustainability


- This model is compliant with Swiss Energy Efficiency Ordinance (730.02).

**APPROVAL:** \_\_\_\_\_


## Optional Accessories

|                                                                                                                                                                                                                                                                                 |            |                          |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|--------------------------|
| • Scraper for cook tops                                                                                                                                                                                                                                                         | PNC 910601 | <input type="checkbox"/> |
| • Connecting rail kit, 900mm                                                                                                                                                                                                                                                    | PNC 912502 | <input type="checkbox"/> |
| • Stainless steel side panel, 900x800mm, freestanding                                                                                                                                                                                                                           | PNC 912511 | <input type="checkbox"/> |
| • Portioning shelf, 1000mm width                                                                                                                                                                                                                                                | PNC 912528 | <input type="checkbox"/> |
| • Portioning shelf, 1000mm width                                                                                                                                                                                                                                                | PNC 912558 | <input type="checkbox"/> |
| • Folding shelf, 300x900mm                                                                                                                                                                                                                                                      | PNC 912581 | <input type="checkbox"/> |
| • Folding shelf, 400x900mm                                                                                                                                                                                                                                                      | PNC 912582 | <input type="checkbox"/> |
| • Fixed side shelf, 200x900mm                                                                                                                                                                                                                                                   | PNC 912589 | <input type="checkbox"/> |
| • Fixed side shelf, 300x900mm                                                                                                                                                                                                                                                   | PNC 912590 | <input type="checkbox"/> |
| • Fixed side shelf, 400x900mm                                                                                                                                                                                                                                                   | PNC 912591 | <input type="checkbox"/> |
| • Stainless steel front kicking strip, 1000mm width                                                                                                                                                                                                                             | PNC 912600 | <input type="checkbox"/> |
| • Stainless steel side kicking strips left and right, freestanding, 900mm width                                                                                                                                                                                                 | PNC 912621 | <input type="checkbox"/> |
| • Stainless steel plinth, freestanding, 1000mm width                                                                                                                                                                                                                            | PNC 912922 | <input type="checkbox"/> |
| • Connecting rail kit: modular 90 (on the left) to ProThermatic tilting (on the right), ProThermatic stationary (on the left) to ProThermatic tilting (on the right)                                                                                                            | PNC 912975 | <input type="checkbox"/> |
| • Connecting rail kit: modular 80 (on the right) to ProThermatic tilting (on the left), ProThermatic stationary (on the right) to ProThermatic tilting (on the left)                                                                                                            | PNC 912976 | <input type="checkbox"/> |
| • Endrail kit, flush-fitting, left                                                                                                                                                                                                                                              | PNC 913111 | <input type="checkbox"/> |
| • Endrail kit, flush-fitting, right                                                                                                                                                                                                                                             | PNC 913112 | <input type="checkbox"/> |
| • Endrail kit (12.5mm) for thermaline 90 units, left                                                                                                                                                                                                                            | PNC 913202 | <input type="checkbox"/> |
| • Endrail kit (12.5mm) for thermaline 90 units, right                                                                                                                                                                                                                           | PNC 913203 | <input type="checkbox"/> |
| • Insert profile d=900                                                                                                                                                                                                                                                          | PNC 913232 | <input type="checkbox"/> |
| • Perforated shelf for warming cabinets and cupboard bases (two-side operated for TL90)                                                                                                                                                                                         | PNC 913237 | <input type="checkbox"/> |
| • Side reinforced panel only in combination with side shelf, for freestanding units                                                                                                                                                                                             | PNC 913259 | <input type="checkbox"/> |
| • Shelf fixation for TL90 two-side operated                                                                                                                                                                                                                                     | PNC 913282 | <input type="checkbox"/> |
| • Filter W=1000mm                                                                                                                                                                                                                                                               | PNC 913666 | <input type="checkbox"/> |
| • Stainless steel dividing panel, 900x800mm, (it should only be used between Electrolux Professional thermaline Modular 90 and thermaline C90)                                                                                                                                  | PNC 913673 | <input type="checkbox"/> |
| • Electric mains switch 63A 10mm <sup>2</sup> NM for modular H800 electric units (factory fitted)                                                                                                                                                                               | PNC 913677 | <input type="checkbox"/> |
| • Stainless steel side panel, 900x800mm, flush-fitting (it should only be used against the wall, against a niche and in between Electrolux Professional thermaline and ProThermatic appliances and external appliances - provided that these have at least the same dimensions) | PNC 913689 | <input type="checkbox"/> |

Front

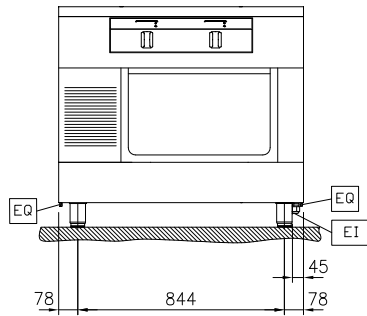


Side

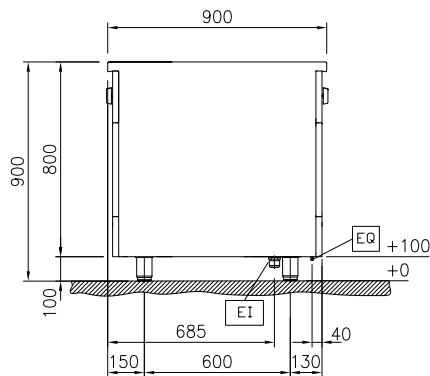

EI = Electrical inlet (power)  
 EQ = Equipotential screw

Top

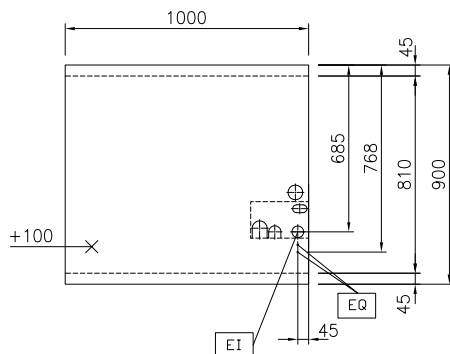

### Electric

|                 |                      |
|-----------------|----------------------|
| Supply voltage: | 400 V/3N ph/50/60 Hz |
| Total Watts:    | 28 kW                |

### Key Information:

|                                     |                              |
|-------------------------------------|------------------------------|
| External dimensions, Width:         | 1000 mm                      |
| External dimensions, Depth:         | 900 mm                       |
| External dimensions, Height:        | 800 mm                       |
| Storage Cavity Dimensions (width):  | 580 mm                       |
| Storage Cavity Dimensions (height): | 330 mm                       |
| Storage Cavity Dimensions (depth):  | 860 mm                       |
| Net weight:                         | 120 kg                       |
| Configuration:                      | Both-Sides Operated; On Base |
| Front Plates Power:                 | 7 - 7 kW                     |
| Back Plates Power:                  | 7 - 7 kW                     |
| Front Plates dimensions:            | 420x370 420x370              |
| Back Plates dimensions:             | 420x370 420x370              |
| Induction Top Dimensions (width):   | 1000 mm                      |
| Induction Top Dimensions (depth):   | 900 mm                       |

### Sustainability

|                      |         |
|----------------------|---------|
| Current consumption: | 43 Amps |
|----------------------|---------|