

**Modular Cooking Range Line
 thermaline 90 - 2 X 5 lt Wells
 Freestanding Electric Pasta Cooker, 1
 Side, H=800**

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



589447 (MCKAFADDAO)

5+5lt electric Pasta Cooker,
 one-side operated

Short Form Specification

Item No. _____

Unit constructed according to DIN 18860_2 with 20 mm drop nose top and 70 mm recessed plinth. Internal frame for heavy duty sturdiness in stainless steel. 2 mm top in 1.4301 (AISI 304). Flat surface construction, easily cleanable. THERMODUL connection system enables seamless worktop when units are connected and avoids soil penetrating. Appliance which can also be used to cook noodles of every kind, rice, dumplings and vegetables. Water basin in 1.4435 (AISI 316L) stainless steel, with automatic constant water level re-fill and water temperature regulation via sensors. Integrated drip tray to drain baskets. Compatible with automatic basket lifting system to facilitate lifting operations. Safety systems and automatic low-water level shut-off protect against overheating. All-round basin raised edges to protect against soil infiltration. Standby function saves energy and quickly recovers maximum power. Metal knobs with embedded hygienic silicon "soft" grip enable easier handling and cleaning. IPX5 water resistant certification.

Configuration: Freestanding, One-side operated.

Main Features

- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Metal knobs with embedded hygienic "soft-touch" grip for easier handling and cleaning. The special design of the controls prevents infiltration of liquids or soil into vital components.
- Constant water level refill.
- Automatic low-water level shut-off: no accidental over-heating.
- In addition to cooking pasta, the appliance can be used for noodles of every kind, rice, dumplings and vegetables.
- Easy to clean basin with rounded corners.
- Large visible digital display manufactured in tempered glass to resist heat and chemicals, showing temperatures or power settings. The display also shows on/off status of the appliance and on/off status of the heating elements.
- Raised edge all around the well to protect from infiltration of dirt from worktop.
- Safety systems protect against overtemperature and can be manually reset.
- Automatic water re-fill regulated by water level sensor at maximum volume.
- Water temperature controlled by electronic sensor and can be selected using 5 power levels.

Construction

- 2 mm top in 1.4301 (AISI 304).
- Unit constructed according to DIN 18860_2 with 20 mm drop nose top and 70 mm recessed plinth.
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Water basin in 1.4435 (AISI 316L) stainless steel is seamlessly welded into the top of the appliance.
- IPX5 water resistance certification.
- Internal frame for heavy duty sturdiness in stainless steel.

Sustainability

- Standby function for energy saving and fast recovery of maximum power.


APPROVAL: _____




Electrolux
PROFESSIONAL

Modular Cooking Range Line
thermaline 90 - 2 X 5 lt Wells Freestanding
Electric Pasta Cooker, 1 Side, H=800

Front




Side

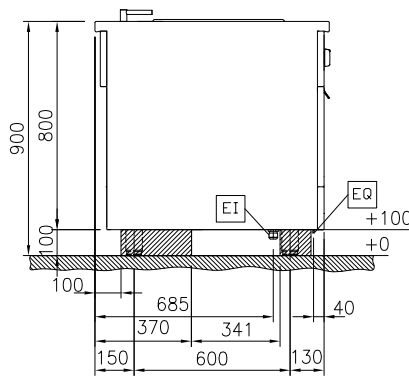

D = Drain
EI = Electrical inlet (power)
EQ = Equipotential screw
WI = Water inlet

Top

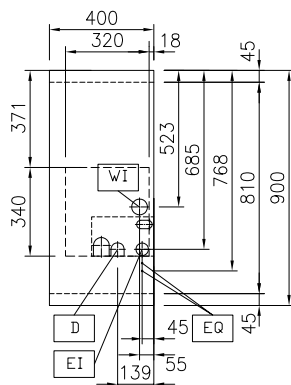

Electric

Supply voltage: 400 V/3N ph/50/60 Hz
Total Watts: 5 kW

Water:

Incoming Cold/hot Water line size: 3/4"
Drain line size: 1"

Key Information:

Number of wells: 2
Usable well dimensions (width): 140 mm
Usable well dimensions (height): 225 mm
Usable well dimensions (depth): 345 mm
Well capacity: 4 lt MIN; 5 lt MAX
Thermostat Range: 40 °C MIN; 90 °C MAX
External dimensions, Width: 400 mm
External dimensions, Depth: 900 mm
External dimensions, Height: 800 mm
Net weight: 65 kg

Configuration: On Base; One-Side Operated

Sustainability

Current consumption: 7.2 Amps



Modular Cooking Range Line
thermaline 90 - 2 X 5 lt Wells Freestanding Electric Pasta Cooker, 1 Side,
H=800

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2025.10.04

Optional Accessories

- | | | | | | |
|--|------------|--------------------------|---|------------|--------------------------|
| • Connecting rail kit, 900mm | PNC 912502 | ☐ | • Endrail kit, flush-fitting, for back-to-back installation, right | PNC 913256 | ☐ |
| • Stainless steel side panel, 900x800mm, freestanding | PNC 912511 | ☐ | • Side reinforced panel only in combination with side shelf, for freestanding units | PNC 913259 | ☐ |
| • Portioning shelf, 400mm width | PNC 912522 | ☐ | • Side reinforced panel only in combination with side shelf, for back-to-back installations, left | PNC 913277 | ☐ |
| • Portioning shelf, 400mm width | PNC 912552 | ☐ | • Side reinforced panel only in combination with side shelf, for back-to-back installation, right | PNC 913278 | ☐ |
| • Folding shelf, 300x900mm | PNC 912581 | ☐ | • Filter W=400mm | PNC 913663 | ☐ |
| • Folding shelf, 400x900mm | PNC 912582 | ☐ | • Stainless steel dividing panel, 900x800mm, (it should only be used between Electrolux Professional thermaline Modular 90 and thermaline C90) | PNC 913673 | ☐ |
| • Fixed side shelf, 200x900mm | PNC 912589 | ☐ | • Electric mainswitch 25A 4mm ² NM for modular H800 electric units (factory fitted) | PNC 913676 | ☐ |
| • Fixed side shelf, 300x900mm | PNC 912590 | ☐ | • Stainless steel side panel, 900x800mm, flush-fitting (it should only be used against the wall, against a niche and in between Electrolux Professional thermaline and ProThermetic appliances and external appliances - provided that these have at least the same dimensions) | PNC 913689 | ☐ |
| • Fixed side shelf, 400x900mm | PNC 912591 | ☐ | | | |
| • Stainless steel front kicking strip, 400mm width | PNC 912594 | ☐ | | | |
| • Stainless steel side kicking strips left and right, freestanding, 900mm width | PNC 912621 | ☐ | | | |
| • Stainless steel side kicking strips left and right, back-to-back, 1810mm width | PNC 912627 | ☐ | | | |
| • Stainless steel plinth, freestanding, 400mm width | PNC 912916 | ☐ | | | |
| • Connecting rail kit: modular 90 (on the left) to ProThermetic tilting (on the right), ProThermetic stationary (on the left) to ProThermetic tilting (on the right) | PNC 912975 | ☐ | | | |
| • Connecting rail kit: modular 80 (on the right) to ProThermetic tilting (on the left), ProThermetic stationary (on the right) to ProThermetic tilting (on the left) | PNC 912976 | ☐ | | | |
| • 2 baskets for 2x5lt pasta cooker | PNC 913034 | ☐ | | | |
| • Endrail kit, flush-fitting, left | PNC 913111 | ☐ | | | |
| • Endrail kit, flush-fitting, right | PNC 913112 | ☐ | | | |
| • Lid for 2x5lt pasta cooker | PNC 913150 | ☐ | | | |
| • False bottom for 2x5lt pasta cooker basket | PNC 913158 | ☐ | | | |
| • Endrail kit (12.5mm) for thermaline 90 units, left | PNC 913202 | ☐ | | | |
| • Endrail kit (12.5mm) for thermaline 90 units, right | PNC 913203 | ☐ | | | |
| • Stainless steel side panel, left, H=800, flush | PNC 913224 | ☐ | | | |
| • Stainless steel side panel, left, H=800, flush | PNC 913225 | ☐ | | | |
| • T-connection rail for back-to-back installations without backsplash (to be ordered as S-code) | PNC 913227 | ☐ | | | |
| • Insert profile d=900 | PNC 913232 | ☐ | | | |
| • Energy optimizer kit 14A - factory fitted | PNC 913244 | ☐ | | | |
| • Endrail kit, (12.5mm), for back-to-back installation, left | PNC 913251 | ☐ | | | |
| • Endrail kit, (12.5mm), for back-to-back installation, right | PNC 913252 | ☐ | | | |
| • Endrail kit, flush-fitting, for back-to-back installation, left | PNC 913255 | ☐ | | | |